February 2026 Blizzard
Final Event Report

February 23 – March 3, 2026



EVERSOURCE

Table of Contents

1 Executive Summary 3
2 Event Description 10
2.1 Pre-Event Preparedness 11
2.2 Damage Assessment 21
2.3 Summary of All Available Resources 25
2.4 Event Timeline 26
2.5 Event Details 40
3 Event Classification 41
4 Weather Overview and Impacts 45
4.1 Weather Overview 45
4.2 Weather Impacts 47
5 Equipment Damage 52
5.1 Transmission Lines Affected or Became Inoperative 52
5.2 Substations Affected 53
5.3 Distribution Feeders Affected/Locked Out 54
5.4 Number of Broken Poles Replaced 54
5.5 Number of Feet of Primary and Secondary Conductoring Replaced 60
5.6 Number of Feet of Follow Up Conductoring Remaining 62
5.7 Number of Damaged Transformers 62
5.8 Availability of Replacement Transformers 67
5.9 Switching Necessary to Re-Route Power 67
6 Trouble Order System 67
7 Wires-Down Operations 68
8 Crew Supplements 69
8.1 Crew Acquisition, By Type, and Daily Crew Availability 69
8.2 Number and Type of Crews From Outside the Company 70
8.3 Number of Crews Deployed, By Type, To Each District 75
9 Food and Lodging 83
9.1 Number of Beds Booked 84
9.2 Hotels Used During Emergency Restoration 86
10 Drones, Helicopters, Specialized Equipment 96

10.1 Drone Usage 96
10.2 Helicopter Usage 97
10.3 Specialized equipment 97
11 Communications 98
11.1 Liaison Process 98
11.1.1 Pre-Event Liaison Communication 98
11.1.1 Service Restoration Stage 98
11.1.2 Post-Event Stage 99
11.2 Communications with Municipalities 99
11.2.1 Pre-Event Stage 99
11.2.2 Service Restoration Stage 99
11.2.3 Post-Event Stage 103
11.3 Life-Safety Customer Communications 103
11.4 All Customer Communications 104
11.4.1 Pre-Event Stage 104
11.4.2 In-Event and Service Restoration Stage 104
11.5 Communication With Media Relations and Social Media Activities 107
11.6 News releases and media outreach and response 117
11.7 Communications with Eversource Employees 146
11.7.1 Pre-event Stage 146
11.7.2 Service Restoration Stage 147
11.7.3 Post-Storm Stage 148
11.8 Social Media Engagement 148
12 Lessons Learned 154
13 Appendices 157
13.1 DTN Weather Analysis 159
13.2 NWS Briefings 173

1 EXECUTIVE SUMMARY



Between February 23, 2026 and March 3, 2026, NSTAR Electric Company d/b/a Eversource Energy ("NSTAR Electric," "Eversource," or the "Company"), responded to a significant winter weather event ("February 2026 Blizzard") that brought heavy snowfall and damaging winds to the Company's service territory. This event caused significant damage to the Company's electric system. Eversource conducted its response in accordance with its Emergency Response Plan ("ERP") keeping customers and communities safe and informed, and **restoring power as safely and efficiently as possible to 495,834 homes and businesses across 137 communities**.

As a result of the preparation efforts made by the Company in advance of the weather system's impact, internal and external resources were pre-positioned and ready to respond to the initial impacts of the storm. Based on the forecasts and information provided by multiple third-party weather services, Eversource prepared and planned for a Type 3 ERP Event effective Sunday, February 22nd at 6:00 p.m. This event type typically involves between 70,000 to 210,000 customers out of service at the peak of the storm, with restoration accomplished within a 72-to-120-hour (three to five day) period once it is safe to begin restoration activities. Accordingly, the Company set expectations with customers, communities, regulators, and state agencies that they should be prepared for a multi-day outage event. External pre-event communications with stakeholders

began on Friday, February 20th and increased ahead of the Company implementing a Type 3 ERP. The **Governor opened the state's Emergency Operation Center and declared a State of Emergency** on Sunday, February 22, 2026, activating the National Guard. In addition, the Governor and her cabinet held a press conference in advance of the storm, urging people to stay off the roads and prepare for outages lasting multiple days.

The storm system was complex and slow-moving with impacts to Eversource's electric system during the overnight hours of February 23, 2026, with the first outage at 1:01 a.m. The February 2026 Blizzard caused widespread damage across the southeastern portion of the state. Outages began picking up in the early morning hours of Monday, February 23rd as the weather system progressed, with 269,063 concurrent customer outages at peak occurring at 9:00 a.m. on Monday, February 23rd. However, given the slow-moving nature of the weather system, the Company did not experience peak concurrent trouble spots until 5:00 p.m. later that day as the electric system continued to take on damage. The storm brought **blizzard conditions**, with visibility less than one quarter of a mile and winds gusting over 35 miles per hour ("mph") for at least three hours. The **strongest reported wind gusts ranged from 47 to 77 mph** across the Eversource service territory.











In addition to dangerous winds of over 50 miles mph, snowfall rates reached three to four inches per hour in the South region of the Eversource service territory. **Total snow accumulations measured anywhere from 7-41 inches**. Hazardous wind gusts mixed with significant snow levels and brought down hundreds of trees and limbs, blocking roads, as well as damaging electrical equipment. As noted, travel across the state was extremely difficult with hundreds of roads closed or blocked, plows unable to keep up with the heavy snowfall rates, and whiteout conditions which, at times, impeded our crews and resources' ability to safely access damage or respond to trouble events. Damage assessment and restoration efforts for this event were monumental due to the amount of snow resources had to travel and physically trek through to access damage locations.

Throughout the event, Eversource Community Liaisons communicated with their assigned town's pre-designated single point of contact to help coordinate public safety events and address community priorities. Public safety events can involve both outage and non-outage trouble spots that may or may not impact a customer's electrical service. However, public safety events typically require the cutting clear or securing of live distribution lines that pose an immediate threat to public safety or the cutting clear of wires that block roadways impairing the ability for emergency response vehicles to respond or for municipal agencies to clear the roadways. In addition, blocked roads caused serious public safety concerns for any residents trapped in their homes. Due to the sheer magnitude of the volume of snow, hundreds of roads were blocked or unplowed across the

state. Local municipal public works crews had difficulty in clearing and plowing roads, which resulted in additional challenges accessing the damaged locations. Responding to these fire, police, standby ("FPS") calls is a top priority for Eversource. The Company **responded to over 1,700 public safety FPS calls**, marking this storm one of the largest public safety events in the Company's history.



Following the Incident Commander's determination, that the conditions were reasonably safe to deploy resources after the cessation of hazardous conditions, on Tuesday, February 24th at 4:00 p.m., and based on the known damage to the system, Eversource announced a system-wide global estimated time of restoration ("ETR") of Friday, February 27th at 11:59 p.m. A global ETR provides an overall estimate of the number of days required to restore 99% of the customers affected. By 11:00 a.m. on Wednesday, February 25th, within 24 hours of announcing the global ETR for the service territory, Eversource announced town-level ETRs for all Eversource communities affected by the blizzard. ETRs provide a guide for restoration, planning, and

communications with stakeholders and customers. Fortunately, due to the localized nature of this event, the Company was able to shift internal resources from other states and utilize mutual aid Eversource crews from New Hampshire and Connecticut, affiliated [1], and non-affiliated [2] contractor crews, eventually **deploying over 2,000 crews and full-time equivalents ("FTEs")**, at the peak of restoration efforts. Crews from as far as Canada worked nonstop in extremely challenging conditions to safely and successfully restore power to more than 95% of its customer base by 12:01 a.m. on Friday, February 27th, and then achieving its Global ETR by February 27, 2026 at 6:00 p.m.










[1] Contracted resources that work daily on the Eversource system, supporting normal operations and are contractually obligated to support restoration efforts as they occur.
[2] Contracted resources that do not perform daily work on the Eversource system and may not be local to the Eversource service territory (Within the states of Massachusetts, Connecticut, and New Hampshire) and can be contracted to support restoration efforts as they occur.

The Company continued to work tirelessly for multiple days on the smallest and most complex jobs that remained across the Cape and Southshore. As anticipated, additional outage calls came in over the weekend, likely from customers checking in on second homes on the Cape. Over the weekend, multiple crews per trouble event were needed to address these off-road and hard to access trouble locations and required specialized equipment and additional crews to climb and/or cut through extremely challenging conditions to reach the damage. Significant time and resources were required for this lateral and service work versus the time it takes to work on the mainline portion of the circuits where large blocks of customers would typically be restored at a much faster rate.









Restoration efforts continued throughout the weekend with the final customer restored by 2:05 a.m. on Tuesday, March 3, 2026. Despite challenging weather conditions, including accumulations of over three feet of snow in some areas, blizzard and white out conditions, and hurricane force winds, the Company responded to the February 2026 Blizzard in a safe, effective, and timely manner to restore service to all impacted customers.

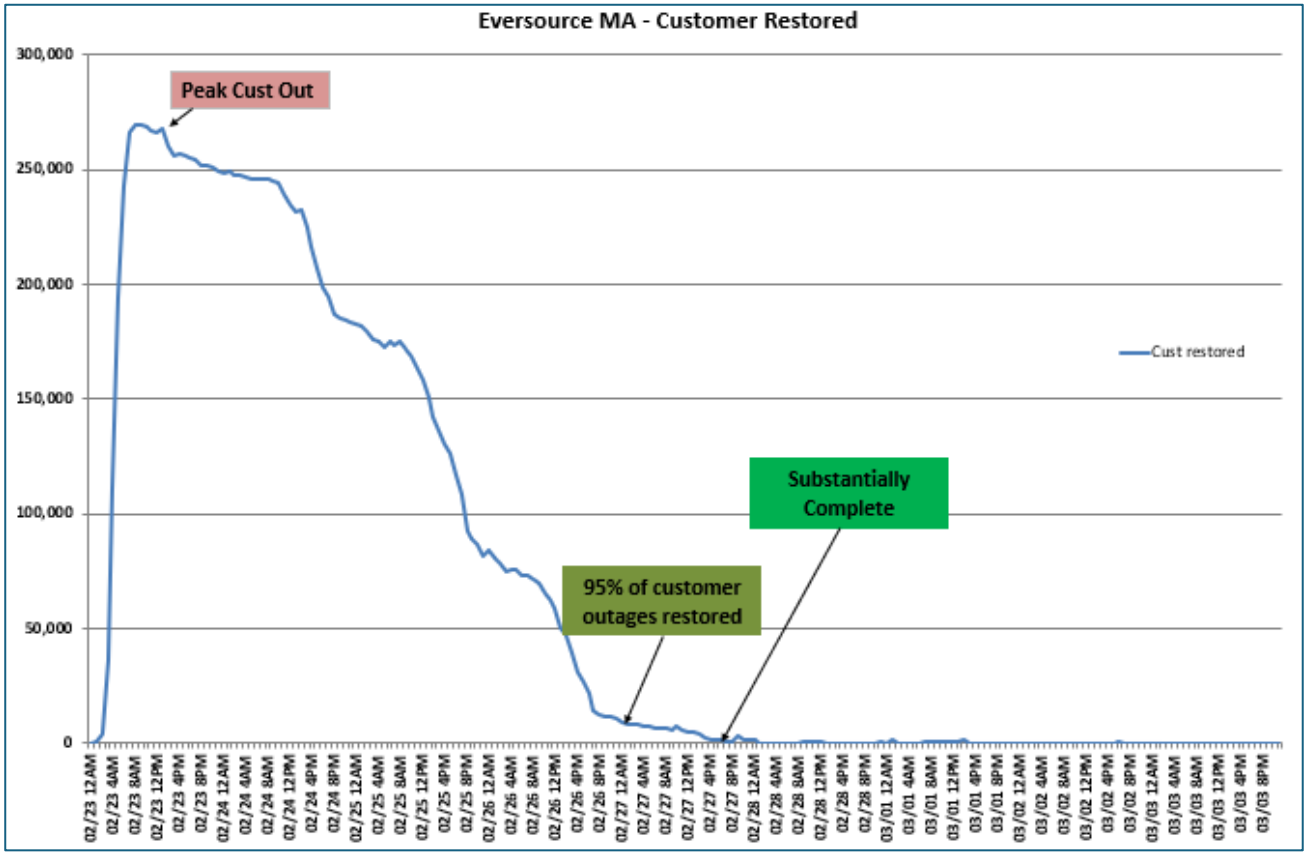


Figure 1. February 2026 Blizzard Customer Outage Restoration Curve.

2 EVENT DESCRIPTION

Eversource Electric serves a total of 1,463,578 electricity customers in 159 communities across the Commonwealth of Massachusetts. Eversource receives and reviews weather forecasts multiple times each day from contracted private weather services. Alerts from the National Weather Service's Boston Office ("NWS") are received and reviewed when a predicted weather event meets NWS triggering guidelines. Additionally, when a predicted weather event meets thresholds for potentially causing power outages (e.g., high winds), the University of Connecticut ("UConn") Eversource Energy Center issues an Outage Prediction Model ("OPM") probability report, and private weather service DTN Weather issues a Storm Impact Analytics ("SIA") probability report, both designed to estimate the total number of trouble spots and related outage location regions. DTN also provides an Energy Event Index[3] ("EEI") forecast, a categorical, risk-based forecast for impactful weather hazards, including wind speed, wind gusts, lightning, heavy rains, snow, and ice accretion.

Energy Event Index Definition

No Leaves (Nov 16 - Apr 10)

EEI	Wind Speed	Wind/Gust	Snow	Ice
1	< 40 mph	< 45 mph	< 6 in.	< 1/10 in.
2	>= 40 mph	>= 45 mph	>= 6 in.	>= 1/10 in.
3	>= 50 mph	>= 55 mph	>= 8 in.	>= 3/8 in.
4	>= 60 mph	>= 70 mph	>= 12 in.	>= 1/2 in.
5	>= 70 mph	>= 85 mph	>= 24 in.	>= 1 in.

Figure 2. DTN Energy Event Index Definition

[3] The DTN Energy Event Index is a risk-based forecast provided by DTN that analyzes potential weather hazards like wind speed, lightning, heavy rain, snow, ice, and wildfires, assigning a categorical rating to indicate the likelihood and severity of an upcoming weather event that could impact energy infrastructure, allowing utilities to better prepare for potential disruptions and outages based on the forecasted risk level.

2.1 Pre-Event Preparedness

Eversource Emergency Preparedness and Operations continuously track the forecasts through multiple weather services to maintain situational awareness of developing weather patterns and potential threats, and to support long-range emergency planning.

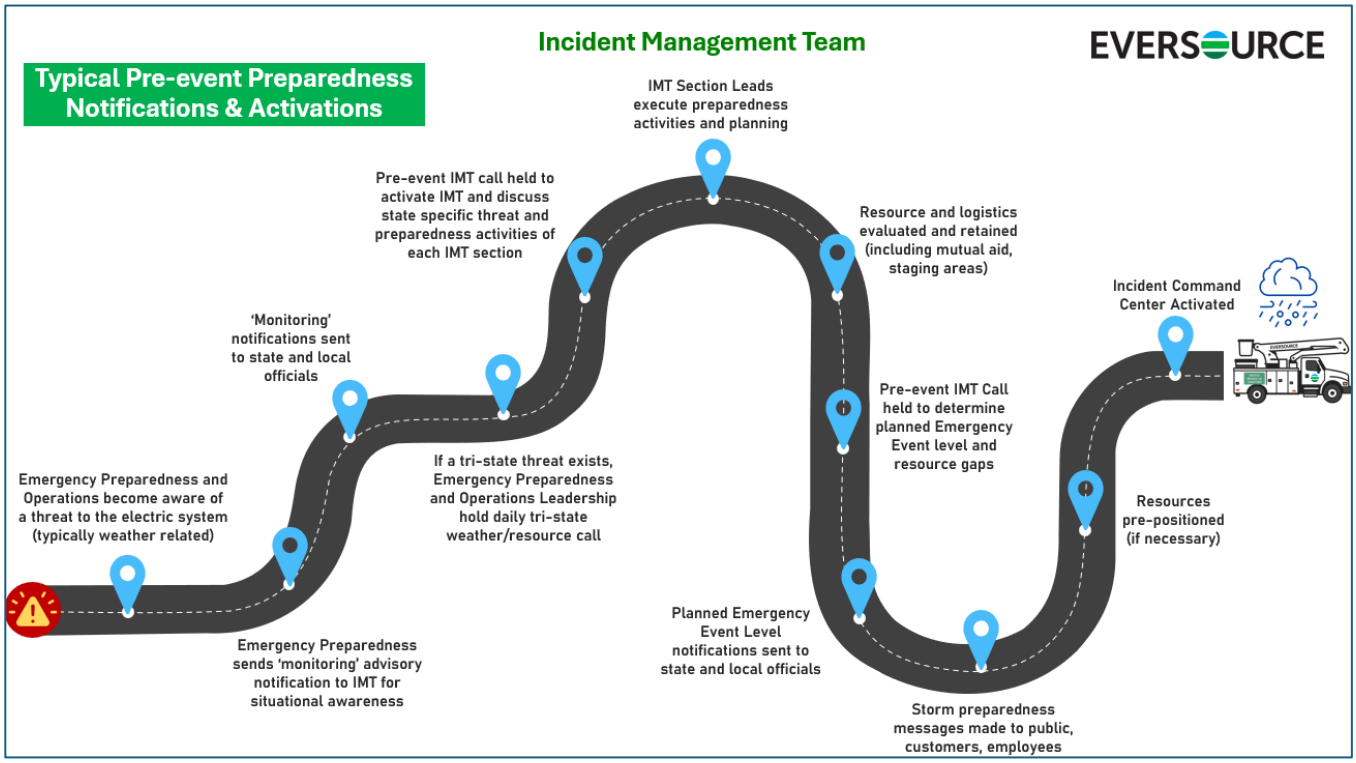


Figure 3. Typical Pre-Event Preparedness Notifications & Activations

Wednesday, February 18, 2026

On February 18, 2026, Eversource began to actively monitor a strong weather system predicted to impact the northeast between Sunday, February 22, 2026, and Tuesday, February 24, 2026. At the time, forecast confidence was low. Both DTN and the NWS first brought attention to the potential storm through weather briefings issued on Wednesday afternoon, February 18th. This

was in addition to a weather event forecasted to impact the service territory on Friday, February 20th. Eversource transitioned to Readiness Condition – Monitoring in preparation for the potential of impacts on Friday, indicating that conditions were developing or soon to exist that could present a potential risk to Eversource in the near future, leading to a heightened level of situational awareness and more frequent communications taking place among decision-makers. The first Emergency Preparedness Weather Advisory was issued to the Massachusetts Incident Management Team ("IMT") at 2:00 p.m. on Wednesday, February 18th, indicating the potential for a storm on Sunday, February 22nd into Monday, February 23rd and the uncertainty of impacts.

Thursday, February 19, 2026

The first DTN EEI weather forecast projecting impacts from a low-pressure system impacting the Eversource service territory was issued on the morning of Thursday, February 19th, with the Cape and Martha's Vineyard highlighted as the only locations likely to receive EEI-2 level snowfall impacts. The Cape and Martha's Vineyard were forecast to receive three to five inches of normal to wet snow consistency accumulation, with a snow ratio of 5-8:1[4] and a 20 percent EEI Snow Chance[5]. No hazardous wind gusts were forecast and DTN remained consistent with NWS forecasts, indicating a heavy, wet snowfall taking place between Sunday, February 22nd and Monday, February 23rd. The Cape, Martha's Vineyard, and the South were all forecast to expect strong north to northeast winds with peak gusts forecasted between 40 and 55 mph in both regions; however, confidence remained low in this forecast due to the potential for system track changes. Model guidance remained uncertain about the storm's path and intensity as the European,

[4] The snow consistency ratio, also known as the snow-to-liquid ratio is a key metric used by the NWS to describe how much snow will accumulate for a given amount of liquid water equivalent. This helps forecasters and decision-makers understand whether snow will be light and fluffy or wet and heavy. For example a ratio of 10:1 is typically considered an average consistency snowfall, no too heavy, not too light.

[5] EEI Confidence Level is not a measure of probability of an event occurring. Confidence is a measure of how likely the forecasted index level will stay at that level from now through the event, or a way to measure the potential for variability in the forecast.

American, and Canadian models indicated the system would stay offshore with limited impacts to the Eversource service territory and the Global Forecast System ("GFS") produced an outlier model forecasting a track that would bring significant snowfall and hazardous winds to Massachusetts. The second Emergency Preparedness Weather Advisory was issued to the MA IMT at 9:00 a.m., highlighting changes to the forecast for Friday and Saturday and continuing to identify the risk of a potential weather threat from Sunday to Monday.

REGION	TIMING	SNOWFALL	SNOW CONSISTENCY	EEI SNOW CHANCES (2)
MA MetroWest	1 AM-4 PM Mon	1-2"	8-12:1 (Normal)	-
MA West Mass	3 AM-12 PM Mon	0-2"	11-16:1 (Normal-Dry)	-
MA Cape/MV	2 AM-8 PM Mon	3-5"	5-8:1 (Normal-Wet)	20%
MA South	4 AM-8 PM Mon	2-3"	6-9:1 (Normal-Wet)	-
MA MetroBoston	5 AM-5 PM Mon	0-2"	7-10:1 (Normal-Wet)	-

Table 1. DTN Forecast Snowfall Amounts and Consistency as of Thursday, February 19, 2026.

Friday, February 20, 2026

Throughout the day on Friday, February 20, 2026, the DTN EEI weather briefings continued to reflect forecast models coming into alignment, identifying EEI-2 level snowfall potential for all Eversource service territory regions and EEI-2 level wind gusts across all regions except for WMA. The NWS indicated there were two possible paths the storm could take, but the forecasting models were not converging yet on a path, resulting in continued uncertainty in the forecast. Regardless of the storm's track, forecasters were concerned about potential impacts along the Cape and Martha's Vineyard and highlighted those areas as being at risk for a potential coastal storm. Subsequently, the NWS issued a High Wind Watch for this region. The third Emergency Preparedness weather advisory, issued to the MA IMT at 2:30 p.m., provided updated situational awareness regarding the increased potential for a coastal storm along the Cape and Martha's

Vineyard region, and highlighted the potential risk for more widespread impacts to the Eversource service territory based on the current model guidance.

REGION	TIMING	SNOWFALL	SNOW CONSISTENCY	EEI SNOW CHANCES (2/3/4)
MA MetroWest	8 PM Sun-8 PM Mon	2-9"	8-12:1 (Normal)	40%/10%/-
MA West Mass	6 PM Sun-6 PM Mon	2-7"	11-16:1 (Normal-Dry)	30%/-/-
MA Cape/MV	4 PM Sun-8 PM Mon	5-13"	5-9:1 (Normal-Wet)	50%/30%/10%
MA South	4 PM Sun-8 PM Mon	4-12"	6-9:1 (Normal-Wet)	50%/30%/-
MA MetroBoston	5 PM Sun-8 PM Mon	3-10"	7-10:1 (Normal-Wet)	40%/20%/-

Table 2. DTN Morning Forecast Snowfall Amounts and Consistency as of Friday, February 20, 2026.

REGION	TIMING	SUSTAINED WINDS	COMMON GUSTS	PEAK GUSTS	EEI GUST CHANCES (2/3)
MA Cape/MV	12 AM-8 PM Mon	NE at 25-35 mph	35-45 mph	45-60 mph	50%/30%
MA South	1 AM- 6 PM Mon	N at 25-30 mph	35-40 mph	40-50 mph	40%/-
MA MetroBoston	4 AM-6 PM Mon	N at 20-28 mph	35-40 mph	40-50 mph	30%/-
MA MetroWest	6 AM-5 PM Mon	N at 20-25 mph	35-40 mph	40-45 mph	20%/-

Table 3. DTN Morning Forecast Sustained Winds and Wind Gusts as of Friday, February 20, 2026.

Based on the updated DTN EEI forecasts and variable uncertainty in the overall track of the storm, Eversource began reviewing on-system affiliated contractor resources available for a Monday (February 23rd) morning start time. By 4:24 p.m., 45 on system crews were confirmed available for Monday. By Friday evening, 100 external overhead line crews were secured for this event.

The evening DTN EEI weather briefing continued to mention the potential for EEI-2 snowfall and hazardous wind gusts for the South and the Cape and Martha's Vineyard areas, with medium-low confidence for snowfall and medium confidence for hazardous wind gusts. The first DTN SIA was issued for EMA at 5:51 p.m. and highlighted the potential for a strong low-pressure system making its way along the east coast and likely bringing snow Sunday (February 22nd) night through Monday (February 23rd) evening, with the heaviest snow amounts falling in EMA. In

addition to the snowfall, the DTN SIA was based on the potential for strong north/northeast wind gusts ranging from 45 to 60 mph. The DTN SIA forecast 1,022 trouble spots for EMA and 13 for WMA. At 9:15 p.m., the WMA forecast increased to 33 trouble spots and at 9:22 p.m., EMA's SIA forecast increased to 1,453 trouble spots.

REGION	TIMING	SNOWFALL	SNOW CONSISTENCY	EEI SNOW CHANCES (2/3/4)
MA MetroWest	8 PM Sun-8 PM Mon	2-9"	8-12:1 (Normal)	40%/10%/-
MA West Mass	6 PM Sun-6 PM Mon	2-7"	11-16:1 (Normal-Dry)	30%/-/-
MA Cape/MV	4 PM Sun-8 PM Mon	5-13"	5-9:1 (Normal-Wet)	50%/30%/10%
MA South	4 PM Sun-8 PM Mon	4-12"	6-9:1 (Normal-Wet)	50%/30%/-
MA MetroBoston	5 PM Sun-8 PM Mon	3-10"	7-10:1 (Normal-Wet)	40%/20%/-

Table 4. DTN Evening Forecast Snowfall Amounts and Consistency as of Friday, February 20, 2026.

The small shifts in the forecast path were the greatest cause of the uncertainty; any shift had the potential to significantly change the impacts from this system, such as the location of the heaviest snowfall amounts and the snow density, or the consistency of the snow that falls.

Saturday, February 21, 2026

During the early morning hours on Saturday, February 21, 2026, another updated DTN SIA for WMA was issued, increasing the forecast to 67 trouble spots. The EMA SIA continued to increase as well, now forecasting 1,517 trouble spots. At 5:28 a.m., the NWS expanded the Winter Storm Watch to include all Southern New England, with High Wind Watches remaining in effect for the Cape and Martha's Vineyard region. The NWS briefing included an over 80 percent chance for the EMA service territory to experience six inches or more of heavy, wet snow. The DTN EEI weather briefing expanded its EEI-2 level forecast of snowfall to all areas except for WMA with medium forecast confidence. Medium confidence, as defined in the DTN EEI Weather Briefings, means there was a 30 to 60 percent chance that the most likely EEI level would remain the same throughout the event, indicating the potential for variability in the forecast. The DTN EEI weather

briefing also upgraded the hazardous wind gust threat to an EEI-2 level for the all Eversource service territory regions, except for WMA. The updated forecasts for greater snowfall accumulation and widespread hazardous wind gusts led to the decision to secure an additional 100 external overhead line crew resources, for a total of 200 crews.

REGION	TIMING	SNOWFALL	SNOW CONSISTENCY	EEI SNOW CHANCES (2/3/4)
MA MetroWest	8 PM Sun-8 PM Mon	4-9"	8-12:1 (Normal)	50%/10%/-
MA West Mass	6 PM Sun-6 PM Mon	3-7"	11-16:1 (Normal-Dry)	30%/-/-
MA Cape/MV	4 PM Sun-8 PM Mon	6-13"	5-9:1 (Normal-Wet)	70%/40%/10%
MA South	4 PM Sun-8 PM Mon	5-12"	6-9:1 (Normal-Wet)	50%/30%/-
MA MetroBoston	5 PM Sun-8 PM Mon	5-10"	7-10:1 (Normal-Wet)	50%/20%/-

Table 5. DTN Morning Forecast Snowfall Amounts and Consistency as of Saturday, February 21, 2026.

REGION	TIMING	SUSTAINED WINDS	COMMON GUSTS	PEAK GUSTS	EEI GUST CHANCES (2/3)
MA Cape/MV	12 AM-8 PM Mon	NE at 25-35 mph	35-45 mph	45-60 mph	60%/30%
MA South	1 AM- 6 PM Mon	N at 25-30 mph	35-40 mph	40-50 mph	50%/-
MA MetroBoston	4 AM-6 PM Mon	N at 20-28 mph	35-40 mph	40-50 mph	40%/-
MA MetroWest	6 AM-5 PM Mon	N at 20-25 mph	35-40 mph	40-45 mph	20%/-

Table 6. DTN Morning Forecast Sustained Winds and Wind Gusts as of Saturday, February 21, 2026.

The first UConn OPM was issued at 8:00 a.m., forecasting 50 to 100 trouble spots for WMA and 1,250 to 2,500 trouble spots for EMA.

The first pre-event IMT call was held at 8:30 a.m. on Saturday, February 21, 2026. During that call, the Incident Commander finalized the decision that Eversource would be implementing a Type 4 ERP effective at 6:00 p.m. on Sunday, February 22, 2026, based on the potential for customer outages. A Type 4 ERP is characterized as events that impact one or more regions, with restoration generally accomplished within a 24-to-72-hour timeframe once it is safe to begin restoration activities. Typically, there are one to five percent (14,000 to 70,000) customer interruptions at peak and 100 to 1,800 lines of trouble at peak.

Following the pre-event IMT call, Regulatory Affairs notified the Department of Public Utilities of the Company's event preparations including that the Company would be implementing a Type 4 ERP in response to the expected nor'easter predicted to impact the service territory Sunday into Monday. Community Relations also updated municipal officials of Eversource's preparation efforts and ERP implementation plans, and reminded communities to make pre-storm preparations, including checking critical facility backup generator fuel levels, especially those likely to be used as warming shelters. In addition, Eversource provided pre-storm communications to all customers in their preferred method (email, text, phone call) to ensure all customers (including medically coded customers) are prepared for a multi-day outage event.

At 9:54 a.m., Eversource transitioned to Readiness Condition – Warning in anticipation of the forecasted nor'easter with general everyday operations still being performed, but conditions developing or soon to exist that could have a relatively high level of probability of impacting Eversource. MA IMT leadership finalized staffing schedules and continued making final pre-storm preparations.

At 12:31 p.m. on Saturday, February 21st, the NWS upgraded the Winter Storm Watch to a Winter Storm Warning for most of the Commonwealth and included most of EMA in a Blizzard Warning, with 10 to 20 inches of heavy, wet snow forecasted. By issuing the Blizzard Warning, the NWS indicated it was expecting areas covered by the Winter Storm Warning to observe a quarter of a mile visibility and wind speeds more than 35 mph for at least three hours.

The DTN EEI weather briefing issued at 1:03 p.m. reflected the upgraded Winter Storm Warnings and Blizzard Warnings and expanded the EEI threat level for snowfall to include all the Commonwealth. The MetroWest and WMA regions were now forecasted to receive EEI-3 level snowfall while the Cape and Martha's Vineyard, MetroBoston, and South regions were forecasted

to receive EEI-4 level snowfall. The snow consistency was normal-wet for the Cape and Martha's Vineyard, MetroBoston, and South regions, meaning a heavier snow that could cause damage via falling trees and downed wires or poles. The threat levels for hazardous wind gusts also increased in this prediction to EEI-2 for MetroBoston and EEI-3 for the South, Cape, and Martha's Vineyard regions. Confidence was medium regarding the snowfall potential Sunday (February 22nd) into Monday (February 23rd) with changes to snowfall totals possible. Confidence was medium for wind gust potential on Monday. The NWS echoed the DTN wind and snowfall threats in its afternoon briefing sent at 2:32 p.m., indicating a high impact nor'easter was expected to affect much of the Eversource service territory.

REGION	TIMING	SNOWFALL	SNOW CONSISTENCY	EEI SNOW CHANCES (2/3/4)
MA MetroWest	8 PM Sun-8 PM Mon	9-13"	8-12:1 (Normal)	100%/60%/40%
MA West Mass	6 PM Sun-6 PM Mon	6-13"	11-16:1 (Normal-Dry)	90%/70%/20%
MA Cape/MV	4 PM Sun-8 PM Mon	12-18"	5-9:1 (Normal-Wet)	100%/100%/70%
MA South	4 PM Sun-8 PM Mon	12-20"	6-9:1 (Normal-Wet)	100%/100%/80%
MA MetroBoston	5 PM Sun-8 PM Mon	9-15"	7-10:1 (Normal-Wet)	100%/100%/70%

Table 7. DTN Evening Forecast Snowfall Amounts and Consistency as of Saturday, February 21, 2026

REGION	TIMING	SUSTAINED WINDS	COMMON GUSTS	PEAK GUSTS	EEI GUST CHANCES (2/3)
MA Cape/MV	12 AM-8 PM Mon	NE at 25-35 mph	40-50 mph	55-65 mph	100%/80%
MA South	1 AM- 6 PM Mon	N at 25-35 mph	40-45 mph	50-60 mph	90%/60%
MA MetroBoston	4 AM-6 PM Mon	N at 20-28 mph	35-40 mph	45-55 mph	70%/20%
MA MetroWest	6 AM-5 PM Mon	N at 20-25 mph	35-40 mph	40-45 mph	30%/-

Table 8. DTN Evening Forecast Sustained Winds and Wind Gusts as of Saturday, February 21, 2026.

The DTN SIA forecast issued at 3:27 p.m. on February 21st for EMA predicted 1,758 trouble spots and 102 trouble spots for WMA. The second UConn OPM was issued at 6:55 p.m., forecasting 1,500 to 3,000 trouble spots in EMA, and 70 to 140 in WMA.

Because of the increase in potential impacts, highlighted through the elevated EEI forecast and OPM and SIA forecasts, Eversource continued to secure external resources. During the afternoon and evening of Saturday, February 21st, Eversource secured an additional 150 crews, for a total of 350 overhead line crews, with an additional 20 service crews, and 50 Damage Assessment ("DA") crews, for a total of 420 external overhead line crews. Additional external line and tree crews were also pre-staged on Martha's Vineyard ahead of the storm impact.

Sunday, February 22, 2026

The morning DTN EEI weather briefing forecast escalated the snowfall threat for the entire Eversource service territory to EEI-4. The Cape/Martha's Vineyard, South, and MetroBoston areas were forecasted to receive anywhere from 12 to 20 inches of snow that was a normal-wet consistency. The MetroWest area was expected to receive 12 to 18 inches of snow that was of normal consistency. WMA was expected to receive 9 to 15 inches of normal to dry snowfall consistency. Each of these areas had at least a 50 percent chance of experiencing EEI-4 snowfall totals. The wind gusts were primarily expected to arrive on Monday, February 23rd with EEI-3 wind gusts expected in the Cape/Martha's Vineyard and South regions. There were also EEI-2 wind gusts expected in the MetroBoston area.

REGION	TIMING	SNOWFALL	SNOW CONSISTENCY	EEI SNOW CHANCES (2/3/4)
MA MetroWest	8 PM Sun-8 PM Mon	12-16"	8-12:1 (Normal)	100%/90%/70%
MA West Mass	6 PM Sun-6 PM Mon	9-15"	11-16:1 (Normal-Dry)	100%/90%/50%
MA Cape/MV	4 PM Sun-8 PM Mon	12-18"	5-9:1 (Normal-Wet)	100%/100%/70%
MA South	4 PM Sun-8 PM Mon	12-20"	6-9:1 (Normal-Wet)	100%/100%/80%
MA MetroBoston	5 PM Sun-8 PM Mon	12-18"	7-10:1 (Normal-Wet)	100%/100%/80%

Table 9. DTN Morning Forecast Snowfall Amounts and Consistency as of Sunday, February 20, 2026

REGION	TIMING	SUSTAINED WINDS	COMMON GUSTS	PEAK GUSTS	EEI GUST CHANCES (2/3)
MA Cape/MV	12 AM-8 PM Mon	NE at 25-35 mph	40-50 mph	55-65 mph	100%/80%
MA South	1 AM- 6 PM Mon	N at 25-35 mph	40-45 mph	50-60 mph	90%/60%
MA MetroBoston	4 AM-6 PM Mon	N at 20-28 mph	35-40 mph	45-55 mph	70%/20%
MA MetroWest	6 AM-5 PM Mon	N at 20-25 mph	35-40 mph	40-45 mph	30%/-

Table 10. DTN Morning Forecast Sustained Winds and Wind Gusts as of Sunday, February 22, 2026.

The second pre-event IMT call took place at 8:30 a.m., on Sunday, February 22nd. Based on the increasing complexity of the weather forecast and the heightened potential for widespread customer outages across the Eversource service territory, the Incident Commander escalated preparedness activities. Additional external overhead line crews were hired based on the concern for increased impacts to the system, including crews from Canada. The storm system was anticipated to be a slow moving, long-duration event, potentially lasting 18 to 24 hours. Given the increased confidence from multiple forecasts and prediction models, the increased predicted hazard wind levels, and the widespread long-duration nature of this storm, the Incident Commander directed the MA IMT to prepare for a Type 3 ERP, effective at 6:00 p.m. on Sunday, February 22nd. Type 3 ERP events are typically characterized as impacting one or more regions with restoration accomplished within a 72-to-120-hour (three to five day) period once it is safe to begin restoration activities. Typically, five to fifteen percent (70,000 to 210,000) customer interruptions occur at peak and 1,500 to 5,000 lines of trouble occur at peak.

Additional and formal communications and updates were provided to external stakeholders following the pre-event IMT call. Due to the Type 3 declaration, in addition to the DPU, Regulatory Affairs also notified MEMA and DOER of Eversource's updated plans and that the combination of heavy snowfall rates and hazard winds could create difficult travel and working conditions, potentially limiting Eversource's ability to quickly respond to community priorities

and outages. Community Relations notified all municipalities of the Company's preparation activities and the Type 3 declaration. An additional round of messaging went out to all customers in Eastern Massachusetts on Sunday to make them aware that conditions may hinder our crews' response to outages. Additionally, Governor Healey declared a State of Emergency in Massachusetts at 1:33 p.m., in advance of the nor'easter, reiterating the anticipated hazardous conditions and activating the National Guard[6].

On Sunday, February 22nd at 6:00 p.m., Eversource moved to a Type 3 Emergency Event posture. Four of five EOCs were activated with Southborough, Boston, and New Bedford activated Sunday, February 22nd at 6:00 p.m., and Yarmouth at 10:00 p.m.

2.2 DAMAGE ASSESSMENT



The Company relies on crews and damage assessors in the field to update their crew leaders and/or necessary tools with remarks on what they are observing in the field for damage and the amount of work anticipated to be required. A broken pole that results in a customer outage may just look like a singular trouble spot on paper but one broken pole can take up to 12 hours to set in challenging terrain or difficult conditions and requires multiple resources to properly address. Setting a pole can add a significant amount of time it takes a crew(s) to restore power to a group of customers impacted by that broken pole. This fact further highlights the importance and role that damage assessments from teams on the ground play to

[6] https://www.mass.gov/news/governor-healey-declares-emergency-activates-national-guard-ahead-of-strong-winter-storm

assist the IMT in understanding both the level of damage to the system and the number of resources needed to address that damage. This information from the field allows the IMT to make more informed decisions when not only assigning resources to respond but also setting realistic and accurate estimated times of restoration for customers.

Based on the direct input from the field, the Company assigns the appropriate resources (tree, line, secondary crews etc.) to that trouble spot to make the area safe and necessary repairs. The information and actual experiences provided directly from the field ultimately drive the Company's decisions about the number of crews that are brought in to restore power as safely and expeditiously as possible. The Company prioritizes its damage assessment efforts, in general, to assess the extent of the damage related to public safety events and address trouble locations where the largest block of customers would be restored per outage event and further uses the results of the damage assessment to assist in making those decisions.

As the forecasted nor'easter moved towards the Massachusetts service territory, the first impacts and associated outages occurred at 1:01 a.m. on Monday, February 23, 2026. Customer outages continued to increase throughout the morning as hazardous wind gusts increased. The peak number of outages was recorded on Monday, February 23rd at 9:00 a.m. with 269,063 customers without power. Peak gusts occurred during the early morning hours of Monday, February 23rd with Wellfleet experiencing a wind gust of 77 mph. For context, hurricane force winds are defined at 74 mph or greater.



DTN Storm Report Summary 7:06 a.m., Monday, February 23rd.

As forecasted, this was a slow-moving system with challenging conditions for our damage assessors and crews. Given the blizzard conditions as well as heavy, wet snow, Eversource continued to stress safety and appreciated the Governor's message from her media briefing: *stay off the roads*. Travel conditions continued to worsen throughout the day on Monday, with snowfall rates as high as 2-4 inches/hour across certain bands (including in Metrowest), this impacted conditions on major roadways as well as side streets. Whiteout conditions with extremely low visibility both for travel and our ability to assess initial damage or make repairs occurred for most of Monday and as predicted, delayed initial restorations efforts until conditions could improve, with safety of our crews top of mind.

Additionally, Governor Healey held multiple press conferences and issued multiple press releases[7], and signed an Executive Order[8] placing an immediate ban on non-essential motor vehicle travel in Bristol, Plymouth, Barnstable and eventually Dukes counties due to the dangerous road conditions and to help support snow removal operations in response to the extraordinary snowfall experienced in the region during this storm.



[7] https://www.mass.gov/news/governor-healey-issues-travel-ban-for-south-coast-of-massachusetts-effective-immediately and https://www.mass.gov/news/governor-healey-partially-lifts-state-of-emergency-adds-marthas-vineyard-to-travel-ban
[8] https://www.mass.gov/doc/south-coast-travel-ban-eo/download

Damage assessment for this event began the morning of Tuesday, February 24th when the Incident Commander deemed it was safe to do so. A detailed damage assessment could not immediately begin after the peak of the storm (February 23rd) due to the slow-moving storm, hazardous winds and white-out blizzard conditions, making travel nearly impossible. Restoration efforts were further impeded by a significant number of blocked roads that were caused by fallen trees, some of which were entangled with electric system equipment.



The Company worked with municipalities to clear blocked roads to ensure public safety, however, some towns did not have sufficient resources to clear all roads due to the sheer volume of snow that needed to be cleared. While main roads became clear and more accessible over time, secondary and tertiary roads were, in large part, impassable and no damage assessment or restoration work could begin until those roads were cleared.


In summary, damage to the Company's system included 196 broken poles, 122 damaged transformers, 36 locked-out distribution feeders, damage to 15 transmission lines, and 28 substations. More details can be found in Section 5 'Equipment Damage'.


2.3 SUMMARY OF ALL AVAILABLE RESOURCES



February 23, 2026 Blizzard

Crew Type	2/22/2026	2/23/2026	2/24/2026	2/25/2026	2/26/2026	2/27/2026	2/28/2026	3/1/2026
Internal Line	105	166	171	270	272	271	100	100
Trouble Shooters	92	94	94	93	93	93	93	93
Service Crews	-	1	5	5	6	6		
Total MA Electric Internal	197	261	270	368	371	370	193	193
Crew Type								
Wire Down-MA Electric	65	67	81	81	81	81		
Wire Down-Contractor		65	66	56	58	8		
Wire Down-Mutual Aid								
Total Wire Down	65	132	147	137	139	89	-	-
Crew Type								
Damage Appraiser-MA Electric	136	136	131	137	133	133	35	30
Damage Appraiser-Contractor	59	99	106	99	99			
Damage Appraiser-Mutual Aid	-	50	50	50	52	52		
Total Damage Appraiser	195	285	287	286	284	185	35	30
External Crew Type								
Internal Crews	197	202	211	207	210	209	193	193
Mutual Aid Primary Crews	-	59	59	161	161	161		
Mutual Aid Secondary Crews	-	14	15	15	15	15		
External Primary Crews	519	891	969	1132	1149	1087	100	100
External Secondary Crews								
Contractor Service Crews	20	60	90	93	162	162		
Tree Crews	175	205	308	325	328	328	71	71
Total Line/Tree	**911**	**1,431**	**1,652**	**1,933**	**2,025**	**1,962**	**364**	**364**
Wire Down	65	132	147	137	139	89	-	-
Damage Assessors	195	285	287	286	284	185	35	30
Grand Total	**1,171**	**1,848**	**2,086**	**2,356**	**2,448**	**2,236**	**399**	**394**
Company Substation/Transmission	60	68	72	72	72	72		
Contractor Substation/ Transmission		13	13	13	13	13		
Total Substation/Transmission	**60**	**81**	**85**	**85**	**85**	**85**	**-**	**-**

2.4 EVENT TIMELINE

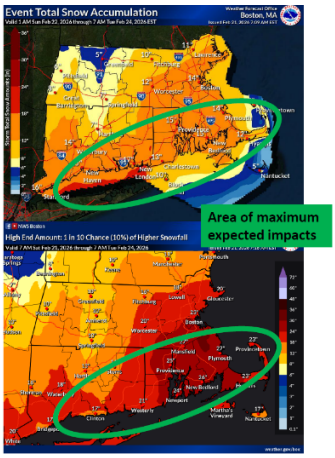Date & Time	Event Description
Wednesday, February 18th	
1:52 p.m.	Transition to Readiness Condition - Monitoring This readiness condition was for another event that was occurring on Friday, February 20th but the Company remained in this condition through the morning of Saturday February 21 due to the nor'easter tracking behind the 2/20 event.
Friday, February 20th	
5:51 p.m.	First DTN SIA Prediction Model issued Forecasting 13 trouble spots for WMA and 1,022 trouble spots for EMA
9:15 p.m.	Updated DTN SIA prediction for WMA Forecasting 33 trouble spots for WMA
Saturday, February 21st	
3:06 a.m.	Updated DTN SIA prediction for WMA Forecasting 67 trouble spots for WMA
7:53 a.m.	First UConn OPM issued Discussion • A major winter storm is expected to impact Southern New England Sunday night through Monday • Blizzard conditions are possible for Coastal CT and Cape Cod and the Islands in EMA • Heavy snow is expected across the region, with **10–20 inches** forecast for much of CT and EMA. Totals will decrease the farther north and west. • Winds will gust **between 30 to 45 mph** across much of the region, with **stronger gusts of 50–60+ mph** possible along the coastal CT, Cape Cod and the Islands on Monday. • Snow density will vary from being around normal to wetter depending on the location. The locations likeliest to see the wetter is across **Southeastern CT and Cape Cod (particularly starting in Plymouth and Bristol counties).** • There is still some in the track of the storm which will impact the location of strongest gusts and heaviest snowfall accumulations. Expected Snowfall Worst Case Possibility 

<table>
<tr><td></td><td>
Trouble Spot Forecast:
WMA: 50-100 TS

NH: 75-150 TS


CT: 1250-2500 TS

EMA: 1250-2500 TS

Summary Table:
<table>
<tr><th>Territory</th><th>Snow Totals</th><th>Snow Density</th><th>Wind Gusts (mph)</th><th>Recommended TS</th></tr>
<tr><td>CT</td><td>9-18 in</td><td>Medium to Heavy</td><td>50-60</td><td>1250-2500</td></tr>
<tr><td>WMA</td><td>6-12 in</td><td>Medium</td><td>35-45</td><td>50-100</td></tr>
<tr><td>EMA</td><td>9-18 in</td><td>Heavy</td><td>55-65</td><td>1250-2500</td></tr>
<tr><td>NH</td><td>5-10 in</td><td>Medium</td><td>35-45</td><td>75-150</td></tr>
</table>
Probability of TS ranges:
<table>
<tr><td>Trouble spots</td><td>0-30</td><td>30-70</td><td>70-150</td><td>150-300</td><td>300-500</td><td>500-750</td><td>750-1500</td><td>1500-5000</td><td>>5000</td></tr>
<tr><td>CT</td><td>0%</td><td>0%</td><td>0%</td><td>0%</td><td>0%</td><td>10%</td><td>30%</td><td>35%</td><td>25%</td></tr>
<tr><td>WMA</td><td>20%</td><td>40%</td><td>40%</td><td>20%</td><td>0%</td><td>0%</td><td>0%</td><td>0%</td><td>0%</td></tr>
<tr><td>EMA</td><td>0%</td><td>0%</td><td>0%</td><td>0%</td><td>0%</td><td>15%</td><td>30%</td><td>40%</td><td>20%</td></tr>
<tr><td>NH</td><td>10%</td><td>20%</td><td>50%</td><td>20%</td><td>0%</td><td>0%</td><td>0%</td><td>0%</td><td>0%</td></tr>
</table>
</td></tr>
<tr><td>8:30 a.m.</td><td>First Pre-Event Massachusetts IMT Call</td></tr>
<tr><td>9:21 a.m.</td><td>DPU notified of Eversource implementation of a Type 4 ERP effective 6:00 p.m. on Sunday, February 22, 2026</td></tr>
<tr><td>9:54 a.m.</td><td>Transition to Readiness Condition - Warning</td></tr>
<tr><td>10:40 a.m.</td><td>First Preparedness Briefing issued to the IMT and MA employees
• Eversource is preparing for the impacts of a powerful Nor’easter that is currently expected to bring hazardous wind gusts, large quantities of heavy, wet snow, and blizzard conditions to Massachusetts Sunday night into Monday. The highest snowfall totals and strongest winds are expected in coastal areas, but all areas of Eastern Massachusetts are likely to see significant snowfall and hazardous gusts.
• Peak wind gusts could reach 55 to 65 mph in coastal areas, 45 to 55 mph in inland areas of Eastern Massachusetts, and 35 to 45 mph in Western Massachusetts. Winds at these levels can bring trees and limbs down on our electric equipment, causing outages. The period of peak winds is forecast to be early morning through mid-afternoon Monday.
• Current snowfall forecasts are 12 to 20 inches on the South Coast, Cape Cod and the Islands; 9 to 15 inches in Boston and MetroWest; and 6 to 13 inches in Western Massachusetts.
• Snow is generally expected to be of normal consistency, but could be wetter in coastal areas.
• The combination of snow, gusty winds, and potential coastal flooding in some areas may create difficult travel conditions, limiting Eversource’s ability to quickly respond to community</td></tr>
</table>

	priorities and outages, especially during the peak of the storm. We will respond as quickly as safety permits. • Confidence in a significant storm is medium-high, but specific impacts will depend on the storm's track and could vary from the above forecast. Eversource continues to closely monitor forecasts. • Based on current threats, outage predictions, and weather forecasts, Eversource Electric Operations intends to declare an Event Type 4 (Upgraded Enhanced Operations) effective at 6 p.m. on Sunday. This event type typically involves 1% to 5% of customers (14,000 to 70,000 customers) without power at the peak of the event. Restoration is generally accomplished within a 24- to 72-hour period once it is safe to begin restoration work.
12:03 p.m.	First Pre-Event Incident Action Plan ("IAP") issued to the IMT • Based on the current threats, outage prediction, and weather forecasts expected Sunday, all sections to finalize planning for a Level 4 event effective Sunday 02/22 1800 hours. • Anticipate moving off blue sky messaging to grey sky messaging at 1800 hours Sunday 02/22. If outages pick up before 1800 System Operations can move to grey sky earlier. • Communicate to all restoration staffing the importance of accurate Estimated Time of Restoration (ETR) management. • Finalize roster for external resources and confirm that there are sufficient Authorized-Persons-List (APL) qualified personnel. • Complete restoration of high-risk transmission out of service (OSS) recallable lines/transformers by Sunday 02/22. • Ensure Eversource EOC staffing plans are loaded to the EOC SharePoint and ensure all resources, including external crews, are actively loaded into the ARCOS roster management tool. • Finalize outreach to internal employees, external customers, communities, regulators, and state agencies. • Ensure facilities and vehicles are prepared for heavy snow and wind conditions. • Continue planning for availability and location of lodging and generators in the Cape area. • Logistics to plan for snow removal at area work centers, Emergency Operations Centers, and field operations. • Communicate to crews the importance of proper footwear, PPE, and travel for snow conditions.
6:55 p.m.	Second UConn OPM issued


Discussion

- Confidence continues to increase in a significant winter storm impacting New England.
- Recent model runs have trended towards a stronger storm that is closer to the coast. This has increased snowfall accumulations and wind gusts across EMA and Eastern CT.
- Snow totals have increased in EMA to **12-24 inches** and in CT to **10-20 inches.**
- Wind gusts will peak on Monday with most of the region seeing gusts around **45 to 55 mph.** Stronger gusts are expected over coastal CT and EMA where gusts of **55–65+ mph** are possible.
- The areas with the heaviest/wettest snow are portions of **New London County in CT** and **Plymouth, Bristol and Barnstable Counties in EMA.**

Expected Snowfall



Expected Wind Gusts




Trouble Spot Forecast:


WMA: 70-140 TS




NH: 120-240 TS



CT: 1400-2800 TS



EMA: 1500-3000 TS




Summary Table:


Territory	Snow Totals	Snow Density	Wind Gusts (mph)	Recommended TS
CT	10-20 in	Medium to Heavy	50-60	1400-2800
WMA	7-14 in	Medium	40-50	70-140
EMA	12-24 in	Heavy	60-70	1500-3000
NH	5-10 in	Medium	40-50	120-240

Probability of TS ranges:

Trouble spots	0-30	30-70	70-150	150-300	300-500	500-750	750-1500	1500-5000	>5000
CT	0%	0%	0%	0%	0%	5%	25%	45%	25%
WMA	0%	35%	50%	15%	0%	0%	0%	0%	0%
EMA	0%	0%	0%	0%	0%	0%	30%	40%	30%
NH	0%	15%	35%	40%	10%	0%	0%	0%	0%

Sunday, February 22nd	
8:30 a.m.	Second Pre-Event Massachusetts IMT Call
9:26 a.m.	DPU, MEMA, DOER notification of Eversource's escalation to Type 3 ERP effective at 6:00 p.m. on Sunday, February 22, 2026.
9:57 a.m.	Second Pre-Event IAP issued to the IMT • Based on the current threats, outage prediction, and weather forecasts expected today 02/22, all sections to finalize planning for a Level 3 event effective today, 1800 hours. • Anticipate moving off blue sky messaging to grey sky messaging at 2100 hours today 02/22. If outages pick up before 1800, System Operations can move to grey sky earlier. • Communicate to all restoration staffing the importance of accurate Estimated Time of Restoration (ETR) management. • Finalize roster for external resources and confirm that there are sufficient Authorized-Persons-List (APL) qualified personnel. • Complete restoration of high-risk transmission out of service (OSS) recallable lines/transformers by today 02/22. • Ensure Eversource EOC staffing plans are loaded to the EOC SharePoint and ensure all resources, including external crews, are actively loaded into the ARCOS roster management tool. • Finalize outreach to internal employees, external customers, communities, regulators, and state agencies. • Ensure facilities and vehicles are prepared for heavy snow and wind conditions. • Continue planning for availability and location of lodging and generators in the Cape area. • Logistics to plan for snow removal at area work centers, Emergency Operations Centers, and field operations. • Communicate to crews the importance of proper footwear, PPE, and travel for snow conditions.
10:47 a.m.	Third UConn OPM issued Discussion • A significant winter storm will impact the region starting this evening. Blizzard conditions are possible for most of EMA and Coastal CT • Confidence has increased in widespread snow totals of **12-24 inches** and in EMA and CT. • Wind gusts will be strongest on Monday. Interior portions of the region will see gusts around **45 to 55 mph.** Stronger gusts are expected over coastal CT and EMA where gusts of **55–70+ mph** are possible. • The areas with the heaviest/wettest snow are **coastal Middlesex and all of New London County in CT** and **Plymouth, Bristol and Barnstable Counties plus the Islands in EMA.** Expected Snowfall  Expected Wind Gusts 

Trouble Spot Forecast:

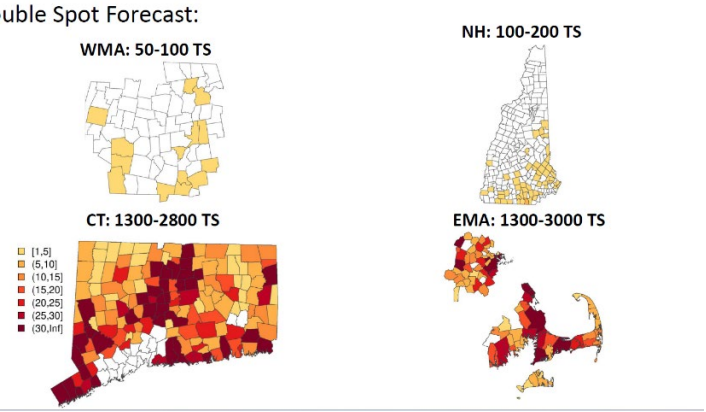

Summary Table:

Territory	Snow Totals	Snow Density	Wind Gusts (mph)	Recommended TS
CT	12-24 in	Medium to Heavy	50-60	1300-2800
WMA	8-16 in	Medium	40-50	50-100
EMA	12-24 in	Heavy	60-70	1300-3000
NH	6-12 in	Medium	35-45	100-200

Probability of TS ranges:

Trouble spots	0-30	30-70	70-150	150-300	300-500	500-750	750-1500	1500-5000	>5000
CT	0%	0%	0%	0%	0%	10%	30%	55%	5%
WMA	0%	40%	50%	10%	0%	0%	0%	0%	0%
EMA	0%	0%	0%	0%	0%	0%	30%	50%	20%
NH	0%	20%	40%	30%	10%	0%	0%	0%	0%

12:30 p.m. Second Preparedness Briefing issued to the IMT and MA Employees

- Eversource is continuing to prepare for the impacts of a powerful Nor'easter that is currently expected to bring hazardous wind gusts, large quantities of heavy, wet snow, and blizzard conditions to Massachusetts Sunday night into Monday evening. The highest snowfall totals and strongest winds are expected in coastal areas, but the storm has been tracking to the northwest and all areas of Eastern Massachusetts are likely to see significant snowfall and hazardous gusts.
- Peak wind gusts could reach 55 to 70 mph in coastal areas, 45 to 55 mph in inland areas of Eastern Massachusetts, and 35 to 45 mph in Western Massachusetts. Winds at these levels can bring trees and limbs down on our electric equipment, causing outages. The period of peak winds is forecast to be early morning through mid-afternoon Monday.
- Current snowfall forecasts are 12 to 20 inches in Boston, MetroWest, South Coast, and Cape Cod and the Islands; and 9 to 15 inches in Western Massachusetts. Pockets of higher totals are possible.
- Snow is generally expected to be of wet, heavy consistency, changing to normal consistency for inland areas as the storm goes on, but remaining wetter in coastal areas.
- The combination of snow, gusty winds, and potential coastal flooding in some areas may create difficult travel conditions, limiting Eversource's ability to quickly respond to community priorities and outages, especially during the peak of the storm. We will respond as quickly as safety permits.

<table>
<tr><td></td><td>Confidence in a significant storm is high, but specific impacts will depend on the storm's track and could vary from the above forecast. Eversource continues to closely monitor forecasts.
Based on current threats, outage predictions, and weather forecasts, Eversource Electric Operations has upgraded its planned event declaration to an Event Type 3 (Moderate Regional Event) effective at 6 p.m. on Sunday. This event type typically involves 5% to 15% of customers (70,000 to 210,000 customers) without power at the peak of the event. Restoration is generally accomplished within a 72- to 120-hour period once it is safe to begin restoration work.</td></tr>
<tr><td>1:33 p.m.</td><td>Governor Maura Healey declares a State of Emergency for the Commonwealth ahead of the nor'easter expected to hit the New England coast.</td></tr>
<tr><td>5:00 p.m.</td><td>Pre-Event Report to DPU, DOER, MEMA issued.</td></tr>
<tr><td>6:00 p.m.</td><td>Transition to Readiness Condition - Emergency
Type 3 ERP implemented</td></tr>
<tr><td>6:00 p.m.</td><td>Southborough, New Bedford, and Boston EOCs opened</td></tr>
<tr><td>7:04 p.m.</td><td>Fourth UConn OPM issued
The summary table for all the territories is show below:
****** As a reminder, Trouble Spots (TS) are defined as an event that impacts >=1 customer and lasts for >=5 minutes ******
<table><tr><th>Territory</th><th>Snow Totals</th><th>Snow Density</th><th>Wind Gusts (mph)</th><th>Recommended TS</th></tr><tr><td>CT</td><td>14-24 in</td><td>Medium to Heavy</td><td>50-60</td><td>1300-3000</td></tr><tr><td>WMA</td><td>8-16 in</td><td>Medium</td><td>40-50</td><td>60-120</td></tr><tr><td>EMA</td><td>14-28 in</td><td>Heavy</td><td>60-70</td><td>1750-3500</td></tr><tr><td>NH</td><td>6-12 in</td><td>Medium</td><td>35-45</td><td>120-240</td></tr></table>And the probability table is shown below:
<table><tr><td>Trouble spots</td><td>0-30</td><td>30-70</td><td>70-150</td><td>150-300</td><td>300-500</td><td>500-750</td><td>750-1500</td><td>1500-5000</td><td>>5000</td></tr><tr><td>CT</td><td>0%</td><td>0%</td><td>0%</td><td>0%</td><td>0%</td><td>10%</td><td>30%</td><td>50%</td><td>10%</td></tr><tr><td>WMA</td><td>0%</td><td>30%</td><td>50%</td><td>20%</td><td>0%</td><td>0%</td><td>0%</td><td>0%</td><td>0%</td></tr><tr><td>EMA</td><td>0%</td><td>0%</td><td>0%</td><td>0%</td><td>0%</td><td>0%</td><td>25%</td><td>55%</td><td>20%</td></tr><tr><td>NH</td><td>0%</td><td>10%</td><td>45%</td><td>35%</td><td>10%</td><td>0%</td><td>0%</td><td>0%</td><td>0%</td></tr></table></td></tr>
<tr><td>8:00 p.m.</td><td>Table A Outage Report sent to DPU, Department of Energy Resources ("DOER"), and the Massachusetts Emergency Management Agency ("MEMA")</td></tr>
<tr><td>10:00 p.m.</td><td>Yarmouth EOC opened</td></tr>
<tr><td colspan="2">Monday, February 23rd</td></tr>
<tr><td>12:00 a.m.</td><td>Table A Outage Report sent to DPU, DOER, and MEMA
Table B Crew Report sent to DPU, DOER, and MEMA</td></tr>
<tr><td>1:01 a.m.</td><td>First impacts and related outages from the February 23, 2026 Blizzard to Eversource customers</td></tr>
<tr><td>4:00 a.m.</td><td>Table A Outage Report sent to DPU, DOER, and MEMA</td></tr>
<tr><td>7:00 a.m.</td><td>First In-Event Massachusetts IMT Call</td></tr>
<tr><td>8:00 a.m.</td><td>Table A Outage Report sent to DPU, DOER, and MEMA
Table B Crew Report sent to DPU, DOER, and MEMA</td></tr>
<tr><td>9:32 a.m.</td><td>IAP issued to the IMT</td></tr>
</table>

	• Top Priority is to ensure the safety of the public and employees by addressing blocked roads, down wires, and FPS 1 and FPS 2 Calls. • Concentrate on executing plans for morning crew shift based on event impact • As outage numbers increase, work with towns to prioritize blocked roads, critical facilities, and any events that are deemed a priority by towns – including identifying all schools in need of restoration. • Ensure all resource moves, including external crews, are managed using the ARCOS roster management tool. • Complete restoration of high-risk transmission out of service ("OSS") recallable lines. • Continue to proactively communicate with customers, municipal officials, regulators, and state agencies as necessary. • Be prepared for snow removal to aid in cleaning blocked roads and restoring outage events. • Continue to communicate importance of proper ETR management to all restoration staff.
12:00 p.m.	Table A Outage Report sent to DPU, DOER, and MEMA
1:00 p.m.	Second In-Event Massachusetts IMT Call
4:00 p.m.	Table A Outage Report sent to DPU, DOER, and MEMA Table B Crew Report sent to DPU, DOER, and MEMA
7:00 p.m.	Third In-Event Massachusetts IMT Call
8:00 p.m.	Table A Outage Report sent to DPU, DOER, and MEMA
8:21 p.m.	IAP issued to the IMT • Top Priority is to continue ensuring the safety of the public and employees by addressing blocked roads, down wires, and Fire and Police (FPS) 1 and FPS 2 Calls. • Concentrate on executing plans for evening crew shift based on event impact • As outage numbers increase or stabilize, work with towns to prioritize blocked roads, critical facilities, and any events that are deemed a priority by towns – including identifying all schools in need of restoration. • Ensure all resource moves, including external crews, are managed using the ARCOS roster management tool. • Complete restoration of high-risk transmission out of service (OSS) recallable lines • Continue to proactively communicate with customers, municipal officials, regulators, and state agencies as necessary. • Be prepared for snow removal to aid in cleaning blocked roads and restoring outage events. • Continue to communicate importance of proper Estimated Time of Restoration (ETR) management to all restoration staff. • Equally dividing crews coming to be sent to South and Cape – 2/3 on day shift and 1/3 on night shift

	• Damage assessors will be deployed tomorrow as conditions are still hazardous and zero to no visibility on the roads • Stressing safe driving; putting chains on all vehicles to navigate the conditions • Continue active engagement with communities, particularly New Bedford/Plymouth and Yarmouth EOCs
Tuesday, February 24th	
12:00 a.m.	Table A Outage Report sent to DPU, DOER, and MEMA Table B Crew Report sent to DPU, DOER, and MEMA
4:00 a.m.	Table A Outage Report sent to DPU, DOER, and MEMA
6:00 a.m.	Incident Commander declares it safe to begin damage assessment and restoration activities
7:00 a.m.	Fourth In-Event Massachusetts IMT Call
8:00 a.m.	Table A Outage Report sent to DPU, DOER, and MEMA Table B Crew Report sent to DPU, DOER, and MEMA
8:39 a.m.	IAP issued to the IMT • Top Priority is to continue ensuring the safety of the public and employees by addressing blocked roads, down wires, and Fire and Police (FPS) 1 and FPS 2 Calls. • Concentrate on executing restoration plan for today Tue 02/24 • Damage assessors will be deployed Today 2/24; to priority is to focus on FPS call • Continue to work with towns to prioritize blocked roads, critical facilities, and any events that are deemed a priority by towns • Ensure all resource moves, including external crews, are managed using the ARCOS roster management tool. • Continue to proactively communicate with customers, municipal officials, regulators, and state agencies as necessary; Focus engagement with affected communities, particularly New Bedford/Plymouth and Yarmouth EOCs • Be prepared for snow removal to aid in cleaning blocked roads and restoring outage events. • Continue to communicate importance of proper Estimated Time of Restoration (ETR) management to all restoration staff. • Stressing safe driving; putting chains on all vehicles to navigate the conditions
12:00 p.m.	Table A Outage Report sent to DPU, DOER, and MEMA
1:00 p.m.	Fifth In-Event Massachusetts IMT Call
4:00 p.m.	Table A Outage Report sent to DPU, DOER, and MEMA Table B Crew Report sent to DPU, DOER, and MEMA
4:10 p.m.	Global ETR set for Friday, February 27, 2026 at 11:59 p.m.

7:00 p.m.	Sixth In-Event Massachusetts IMT Call
7:58 p.m.	IAP issued to the IMT • Top Priority is to continue ensuring the safety of the public and employees by addressing blocked roads, down wires, and Fire and Police (FPS) 1 and FPS 2 Calls. • Overnight focus will be on system modeling to ensure the accuracy of outage events in OMS and damage assessment. • Ensure all resource moves, including external crews, are managed using the ARCOS roster management tool. • Ensure that crews are being careful, deliberate and safe when completing the work. • Stressing safe driving; putting chains on all vehicles to navigate the conditions • Continue to proactively communicate with customers, municipal officials, regulators, and state agencies as necessary; focus engagement on affected communities, particularly New Bedford/Plymouth and Yarmouth EOCs • Continue to work with towns to prioritize blocked roads, critical facilities, and any events that are deemed a priority by towns • Communicate importance of proper Estimated Time of Restoration (ETR) management to all restoration staff. • DA initial focus is on FPS 2/3, then on larger customer outages without crews onsite • Complete evaluation of global (ETR); reviewing damage assessment results to inform development of ETRs. • Priority is to maintain accuracy of OMS; keep reinforcing OMS updates by field crews.
8:00 p.m.	Table A Outage Report sent to DPU, DOER, and MEMA
Wednesday, February 25th	
12:00 a.m.	Table A Outage Report sent to DPU, DOER, and MEMA Table B Crew Report sent to DPU, DOER, and MEMA
4:00 a.m.	Table A Outage Report sent to DPU, DOER, and MEMA
7:00 a.m.	Seventh In-Event Massachusetts IMT Call
8:00 a.m.	Table A Outage Report sent to DPU, DOER, and MEMA Table B Crew Report sent to DPU, DOER, and MEMA
10:08 a.m.	IAP issued to the IMT • Top Priority is to continue ensuring the safety of the public and employees by addressing blocked roads, down wires, and Fire and Police (FPS) 1 and FPS 2 Calls. • Continue to proactively communicate with customers, municipal officials, regulators, and state agencies as necessary; focus engagement on affected communities, particularly New Bedford/Plymouth and Yarmouth EOCs • Continue to work with towns to prioritize blocked roads, critical facilities, and any events that are deemed a priority by town

	• Concentrate on executing restoration plans for morning crew shift • Damage Assessment will continue to focus on FPS 2/3, larger customer outages, single customer outages, and substantially impacted towns. • Develop town Level Estimated Time of Restoration (ETR) and restoration plan. • Communicate importance of proper Estimated Time of Restoration (ETR) management to all restoration staff. • Ensure all resource moves, including external crews, are managed using the ARCOS roster management tool. • Priority is to maintain accuracy of OMS; keep reinforcing OMS updates by field crews. • Ensure that crews are being careful, deliberate and safe when completing the work. • Stressing safe driving; putting chains on all vehicles to navigate the conditions
11:00 a.m.	Established Town-Level ETRs
12:00 p.m.	Table A Outage Report sent to DPU, DOER, and MEMA
1:00 p.m.	Eighth In-Event Massachusetts IMT Call
4:00 p.m.	Table A Outage Report sent to DPU, DOER, and MEMA Table B Crew Report sent to DPU, DOER, and MEMA
7:00 p.m.	Ninth In-Event Massachusetts IMT Call
8:00 p.m.	Table A Outage Report sent to DPU, DOER, and MEMA
8:14 p.m.	IAP issued to the IMT • Top Priority is to continue ensuring the safety of the public and employees by addressing blocked roads, down wires, and Fire and Police (FPS) 1 and FPS 2 Calls. • Continue to work with towns to prioritize blocked roads, critical facilities, schools and any events that are deemed a priority by town • Focus on developing strategy for overnight to prepare for a productive day on Thursday • Damage Assessment will continue to focus on FPS 2/3, larger customer outages, single customer outages, and substantially impacted towns. • Developed town Level Estimated Time of Restoration (ETR) and restoration plan. • Communicate importance of proper Estimated Time of Restoration (ETR) management to all restoration staff. • Ensure all resource moves, including external crews, are managed using the ARCOS roster management tool. • Continue maintaining accuracy of OMS by reinforcing importance of OMS updates by field crews. • Ensure that crews are being careful, deliberate and safe when completing the work. • Prioritize clear communications, not rushing, following policies and procedures on switching • Stressing safe driving; putting chains on all vehicles to navigate the conditions

Thursday, February 26th	
12:00 a.m.	Table A Outage Report sent to DPU, DOER, and MEMA Table B Crew Report sent to DPU, DOER, and MEMA
4:00 a.m.	Table A Outage Report sent to DPU, DOER, and MEMA
7:00 a.m.	Tenth In-Event Massachusetts IMT Call
8:00 a.m.	Table A Outage Report sent to DPU, DOER, and MEMA Table B Crew Report sent to DPU, DOER, and MEMA
8:24 a.m.	IAP issued to the IMT • Top Priority is to continue ensuring the safety of the public and employees by addressing blocked roads, down wires, and Fire and Police (FPS) 1 and FPS 2 Calls. • Continue to work with towns to prioritize blocked roads, critical facilities, schools and any events that are deemed a priority by town • Continue to proactively communicate with customers, communities, Mass DPU, and emergency management agencies – Continue to prioritize schools with towns; most towns have pushed school restart to Monday. • Crews are focused on town level ETR, concentrating on the remaining towns that still have substantial outages • Damage Assessment will continue to focus on FPS 2/3, larger customer outages, single customer outages, and substantially impacted towns; expected to be completed today and transition to performing circuit sweep on the hardest hit circuit after. • Focus on completing all transmission work this morning. • Communicate importance of proper Estimated Time of Restoration (ETR) management to all restoration staff. • Ensure all resource moves, including external crews, are managed using the ARCOS roster management tool. • Continue maintaining accuracy of OMS by reinforcing importance of OMS updates by field crews. • Ensure that crews are being careful, deliberate and safe when completing the work. • Prioritize clear communications, not rushing, following policies and procedures on switching • Stressing safe driving; putting chains on all vehicles to navigate the conditions
12:00 p.m.	Table A Outage Report sent to DPU, DOER, and MEMA
1:00 p.m.	Eleventh In-Event Massachusetts IMT Call
4:00 p.m.	Table A Outage Report sent to DPU, DOER, and MEMA Table B Crew Report sent to DPU, DOER, and MEMA
7:00 p.m.	Twelfth In-Event Massachusetts IMT Call
8:00 p.m.	Table A Outage Report sent to DPU, DOER, and MEMA

8:24 p.m.	IAP issued to the IMT • Top Priority is to continue ensuring the safety of the public and employees by addressing blocked roads, down wires, and Fire and Police (FPS) 1 and FPS 2 Calls. • Continue to work with towns to prioritize blocked roads, critical facilities, schools and any events that are deemed a priority by town • Continue to proactively communicate with customers, communities, Mass DPU, and emergency management agencies – Continue to prioritize schools with towns; most towns have pushed school restart to Monday. • Crews are focused on town level ETR, concentrating on the remaining towns that still have substantial outages • Overnight job-scrubbing scheduled to prepare work packages for efficient restoration at first light. • Continue to communicate and emphasize importance of proper Estimated Time of Restoration (ETR) management to all restoration staff. • Continue to ensure all resource moves, including external crews, are managed using the ARCOS roster management tool. • Continue maintaining accuracy of OMS by reinforcing importance of OMS updates by field crews. • Ensure that crews are being careful, deliberate and safe when completing the work. • Prioritize clear communications, not rushing, following policies and procedures on switching
Friday, February 27th	
12:00 a.m.	Table A Outage Report sent to DPU, DOER, and MEMA Table B Crew Report sent to DPU, DOER, and MEMA
4:00 a.m.	Table A Outage Report sent to DPU, DOER, and MEMA
7:00 a.m.	Thirteenth In-Event Massachusetts IMT Call
8:00 a.m.	Table A Outage Report sent to DPU, DOER, and MEMA Table B Crew Report sent to DPU, DOER, and MEMA
8:24 a.m.	IAP issued to the IMT • Reassess needs throughout the day and begin planning demobilization activities. • Ensure all event related documentation is filed in the IMT SharePoint site and prepare documentation for post storm report for Level 3 event. • Continue to proactively communicate with customers, communities, Mass DPU, and emergency management agencies. • Continue to ensure all resource moves, including external crews, are managed using the ARCOS roster management tool – specially now as crews are getting released. • Crews are focused on town level ETR, concentrating on the remaining 3 towns that still have substantial outages • Continue maintaining accuracy of OMS by reinforcing importance of OMS updates by field crews

	• Ensure that crews are being careful, deliberate and safe when completing the work. • Prioritize clear communications, not rushing, following policies and procedures on switching • Stressing safe driving
12:00 p.m.	Table A Outage Report sent to DPU, DOER, and MEMA
1:00 p.m.	Fourteenth In-Event Massachusetts IMT Call
4:00 p.m.	Table A Outage Report sent to DPU, DOER, and MEMA Table B Crew Report sent to DPU, DOER, and MEMA
6:00 p.m.	Global and town level ETRs met with 99% of customers impacted by the event in all impacted towns restored.
6:00 p.m.	ERP De-escalation to Type 5 Event Three of four operational EOCs demobilized and external contract resources released. Yarmouth EOC remains fully operational with internal crews and contingent of external contractors necessary to complete the remaining trouble events.
Saturday, February 28 – Sunday March 1st	
On-going	Additional customer outages calls get reported, likely as people visited their vacation homes over the weekend. Crews continued to respond to all events, addressing the smallest and most complex work of the storm during this time period.
Monday, March 2nd	
8:00 a.m.	Eversource returned to Normal Operations. Yarmouth EOC demobilized.

Table 11. Event Timeline.

2.5 EVENT DETAILS

Event Description	STAT
Date and time of first outage	**2/23/26 1:01 AM**
Total number of customer outages over the course of the event	**495,834**
Total number of communities affected	**137**
Total number of days of restoration	**8**
Date and time of peak number of outages	**2/23/26 9:00 AM**
Peak number of customer outages	**269,063**
Number of customer outages and number of customers restored for each day of the event and restoration	**See Table 12**
Number of total customer outages and number of total customers restored per hour of the event and restoration, in an active Excel spreadsheet	**See Excel included with report**
Time and date of restoration of 95 percent of customers	**2/27/26 12:00 AM**
Time and date of final restoration to customers	**3/3/26 2:05 AM**
Storm Start (first storm outage reported)	**2/23/26 1:01 AM**
Storm End (last storm outage reported)	**3/2/26 7:38 PM**

February 2026 Blizzard Outages		
	Customers Outages	**Customers Restored**
2/23/2026	388,146	138,680
2/24/2026	28,455	94,444
2/25/2026	33,569	135,283
2/26/2026	28,114	98,891
2/27/2026	7,533	17,284
2/28/2026	2,842	3,620
3/1/2026	6,474	6,923
3/2/2026	701	689
3/3/2026	-	20
Total	495,834	495,834

Table 12. Number of customer outages and restorations by day.

Company Name	Year	Event Name	Date/Time Event Start (first storm outage reported)	Date/Time Event End (last storm outage reported)	Event Duration (hours)	Total Customers Served	Total Customers Affected	% of Customers Affected (Relative to Total Customers)
NSTAR Electric (Eversource)	2026	February 2026 Blizzard	2/23/2026 1:01	3/2/2026 19:38	186.5	1,463,578	495,834	34%

Highest Peak # of Customers Affected	Date and Time when Highest Peak # of Customers Affected Occurred	Total Customer Outage Hours	Duration from Highest Peak to 95% Restored (in Hours)	CAIDI Highest Peak to 95% restored (in Hours)		Duration from Highest Peak to 98% restored (in Hours)	CAIDI Highest Peak to 98% restored (in Hours)	Event CAIDI (in Hours)
269,063	2/23/2026 9:00	15,313,674.0	87	36.7		109	36.6	30.9

Table 13. Event restoration duration summary, Table 4-A.

3 EVENT CLASSIFICATION

Eversource began receiving OPM forecasts from DTN as early as Friday, February 20th, with WMA expecting 13 trouble spots and EMA expecting 1,022 trouble spots. As the forecast confidence increased, the number of trouble spots also increased. By Saturday, February 21st, the next DTN SIA prediction showed 63 trouble spots in WMA and 1,596 trouble spots in EMA. As the storm track shifted northwest, moving closer to the Massachusetts coastline, the risk of experiencing significant impacts increased. This change in the storm's trajectory led to a higher likelihood of severe weather conditions affecting the region. Consequently, the number of predicted trouble spots, or areas expected to experience outages and damage, also rose in response to the updated forecasts. Based on the initial trouble spot predictions and refined weather forecasts,

Eversource initially planned to implement the ERP to a Type 4, effective at 6:00 p.m. on Sunday, February 22nd.

Later in the evening on Saturday, February 21st, the first UConn OPM was released with WMA forecasted to experience 70 to 140 trouble spots and EMA forecasts to experience 1,500 to 3,000 trouble spots. The areas in EMA that were of greatest concern were in the South and Cape regions, which aligned with the NWS upgrading the alert from a Winter Storm Watch to a Winter Storm Warning.


On the morning of Sunday, February 22nd, the DTN SIA forecast, released prior to the morning pre-event IMT call, forecasted 120 trouble spots for WMA and 1,915 trouble spots for EMA, which aligned with the increased impacts forecasted by the NWS. However, as the storm track shifted northwest and the snowfall and hazardous wind gust threats increased, the number of predicted trouble spots also increased. Based on the updated trouble spot predictions and forecasts indicating an even more impactful storm, the decision was made to adjust the **ERP implementation to a Type 3 (Moderate Regional Event) on Sunday, February 22nd, at 6:00 p.m**., to position Eversource to respond effectively and efficiently to any potential outages and damage caused by the February 23, 2026 Blizzard. As defined in Eversource's ERP, a Type 3 is a Moderate Regional Event that typically sees five to 15 percent (70,000 to 210,000 customers) peak customer interruptions and restoration accomplished within a three to five period once it is safe to begin restoration activities.

The final pre-event OPMs were issued on Sunday, February 22nd. The final DTN SIA forecast for WMA was 89 trouble spots and 1,725 trouble spots for EMA. The final UConn OPM forecasted 50 to 100 trouble spots for WMA and 1,300 to 3,000 trouble spots for EMA. The final UConn OPM indicated that more of the EMA region, including the South and MetroWest regions, were expected to see a higher number of trouble spots than previously forecasted.


In addition to trouble spot forecasts, the ERP Type decision for the February 23, 2026 Blizzard, relied on historical perspective from past events. The most similar blizzard event was Winter Storm Kenan from January 2022. That event brought roughly two feet of snow to the

Boston area, with snowfall rates between two to four inches per hour with winds up to 70 mph, zero-mile visibility, or white-out, conditions and cities south of the Boston metropolitan area received upwards of 30 inches of snow.

By 12:00 a.m. on Friday, February 27th, Eversource had achieved 95 percent of customers restored. By 6:00 p.m. on Friday, February 27th, Eversource reached the milestone for substantial completion, meaning that over 99 percent of customers impacted by the event had service. Eversource maintained the implementation of the ERP at Type 3 until Friday, February 27th at 6:00 p.m., when the Company de-escalated to a Type 5 ERP implementation. On Monday, March 2nd at 8:00 a.m., Eversource Electric returned to normal operations. The last customer was restored at 2:05 a.m. on Tuesday, March 3rd.

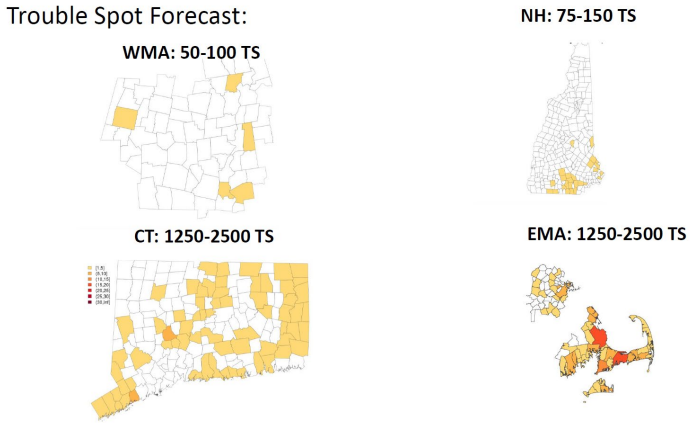

Visual representation of the first UConn OPM forecast received on Saturday, February 21, 2026.

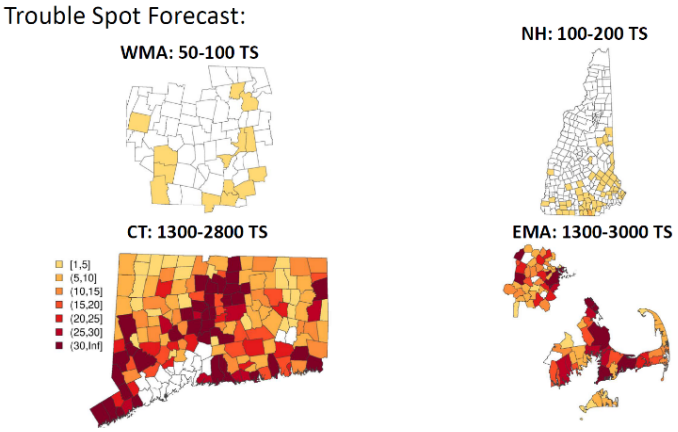

Visual representation of the final UConn OPM forecast received on Sunday, February 22, 2026.

Storm Impact Analytics TROUBLE SPOTS Predictions			
Eversource Energy			
East Mass			
Prediction Type	Outages		
Event Type	Winter		
Forecast Time	2:00 PM Fri Feb 20		
Event Start Time	7:00 PM Sun Feb 22		
Event End Time	12:00 AM Tue Feb 24		
Weather Forecast Confidence	Medium		
Discussion			
Issued 02/20/2026 5:50pm EST. A strong low pressure system is forecast off the Mid-Atlantic coast on Sunday and move northeast through Monday. This will likely push snow across the region by Sunday evening with the snow lasting into Monday late afternoon or evening. The heaviest snow will likely be over the eastern half of MA. The snow should have a normal to dry consistency. Strong north/northeast wind gusts will also occur with sustained winds 20-35 mph and gusts to 45-60 mph. The strongest winds will likely be over the Cape/MV. Confidence is medium at the moment as model differences still exist with the track and amount of snowfall.			
Forecasts By Operating Geography			
State	Best Predicted Value	80% Probability Of Exceedance	20% Probability of Exceedance
East Massachusetts	1022	342	1770
Division	Best Predicted Value	80% Probability Of Exceedance	20% Probability of Exceedance
Cape/MV	489	322	672
MetroBoston	40	0	192
MetroWest	73	0	344
South	420	292	561
AWC	Best Predicted Value	80% Probability Of Exceedance	20% Probability of Exceedance
Boston	20	0	94
Hyde Park	1	0	5
Marthas Vineyard	27	1	55
New Bedford	160	111	214
Plymouth	260	181	347
Somerville	19	0	92
Southboro	26	0	123
Walpole	20	0	93
Waltham	27	0	129
Yarmouth	462	321	617

Storm Impact Analytics TROUBLE SPOTS Predictions			
Eversource Energy			
East Mass			
Prediction Type	Outages		
Event Type	Winter		
Forecast Time	2:00 PM Sun Feb 22		
Event Start Time	7:00 PM Sun Feb 22		
Event End Time	12:00 AM Tue Feb 24		
Weather Forecast Confidence	High		
Discussion			
02/22/2026 4:10pm EST. Updates: No significant changes. A strong low pressure system is forecast to form off the Mid-Atlantic coast on Sunday and move northeast through Monday. This will push snow across the region by Sunday evening with the snow lasting into Monday late afternoon or evening. Snowfall amounts of 12-20 inches can be expected for most areas with isolated higher amounts to 22 inches possible. The snow should have a normal consistency for most of the storm but could start and end with several hours of wet snow. Strong north/northeast wind gusts will also occur with sustained winds 20-35 mph and gusts to 45-70 mph. The strongest winds will likely be over the Cape/MV. Confidence is high.			
Forecasts By Operating Geography			
State	Best Predicted Value	80% Probability Of Exceedance	20% Probability of Exceedance
East Massachusetts	1725	545	2990
Division	Best Predicted Value	80% Probability Of Exceedance	20% Probability of Exceedance
Cape/MV	675	385	985
MetroBoston	174	0	430
MetroWest	312	0	771
South	563	340	802
AWC	Best Predicted Value	80% Probability Of Exceedance	20% Probability of Exceedance
Boston	86	0	211
Hyde Park	5	0	12
Marthas Vineyard	56	11	104
New Bedford	215	130	306
Plymouth	348	211	496
Somerville	84	0	206
Southboro	111	0	275
Walpole	84	0	208
Waltham	117	0	288
Yarmouth	619	374	881

Table 14. Comparison between the first DTN SIA on Friday, February 20, 2022 and the last DTN SIA received on Sunday, February 22, 2026.

4 WEATHER OVERVIEW AND IMPACTS

4.1 WEATHER OVERVIEW



The February 2026 Blizzard first started as a low-pressure system that developed off the mid-Atlantic Coast. Forecast models did correctly anticipate that a system would begin developing in this region; however, the models greatly diverged because of uncertainty around the upper-level energy coming from the west coast that would influence the final track of the system. There was low confidence surrounding the initial forecast because of the timing and location of this energy. This situation created the potential for a final forecast to be significantly inaccurate.

Once more information became available from the following: NWS; radiosondes, a device used by the NWS to capture data from all levels of the atmosphere to provide a picture of the present weather conditions; collected upper-air measurements to track the energy that would steer the system; and from buoys along the mid-Atlantic Coast, the forecast began to coalesce around a significant nor'easter event that would affect Southern New England. The models began converging onto one solution that was closer to New England than initially expected. This convergence did not occur until early Saturday, February 21st. All well-known forecast models initially forecasted this system to stay either entirely clear of New England or a moderate distance

from the coast with minimal snowfall and wind impacts expected. However, the GFS model was consistent about a significant event impacting the New England region but was considered an outlier in the initial model guidance because of how far astray the model placed the system compared to the European, American, and Canadian weather models.[9] The early model divergence and uncertainty was due to small, but relevant, differences in the initialization, or the accuracy of the current conditions when the model's output first runs. Minor differences in the model initialization can produce significantly different outputs, which is why there is not much emphasis placed on model forecasts more than five days out from a significant weather event unless the models agree, or converge, earlier and provide greater confidence in the forecast.



As the system travelled over the Atlantic Ocean and made its way to the New England area, it underwent a period of rapid intensification, also referred to as bombogenesis. This term is used by meteorologists to describe a powerful system that rapidly intensifies, with central pressure measurements dropping 24 millibars ("mb") in 24 hours. The minimum central pressure for this system was 965 mb and produced wind gusts at or above hurricane force. The observed minimum pressure measurements were consistent with those typically associated with a strong Category 2 hurricane, nearly major hurricane status. The system

[9] Forecasts are generated using American, Canadian, and European models, each with distinct parameters. The European model is particularly noted for its strong performance in medium-range forecasting.

was undergoing this intensification as it approached the New England area and peaked later in the evening on Monday, February 23rd before leaving the area and moving towards the Atlantic Ocean. During this rapid intensification, blizzard conditions, whiteout visibility, and snowfall rates in excess of three to four inches per hour were reported across southern Massachusetts.

In addition to the February 23rd blizzard, a secondary clipper system impacted the Eversource service territory during the morning hours of Wednesday, February 25th. The weather system briefly delayed restoration activities during the morning hours due to breezy conditions, frigid temperatures, and limited snow accumulation.

4.2 Weather Impacts

The system overperformed in regard to the measured snowfall reports. The forecast was for areas across southern Massachusetts to receive up to two feet of snow, with an area highlighted that could experience up to 30 inches of snow.








The storm concluded on Monday evening, February 23rd. After the storm passed, there were multiple reports of over three feet of snow impacting the South region due to mesoscale snow

bands[10] setting up in a favorable area that contained snowfall rates of multiple inches per hour for an extended period. The highest reported snowfall amount came from Fall River, Massachusetts with 41 inches of snow. Dartmouth, New Beford, and Barnstable County reported receiving 37 inches of snow. Kingston and Somerset reported 36 inches of snow. Scituate reported 32 inches of snow.

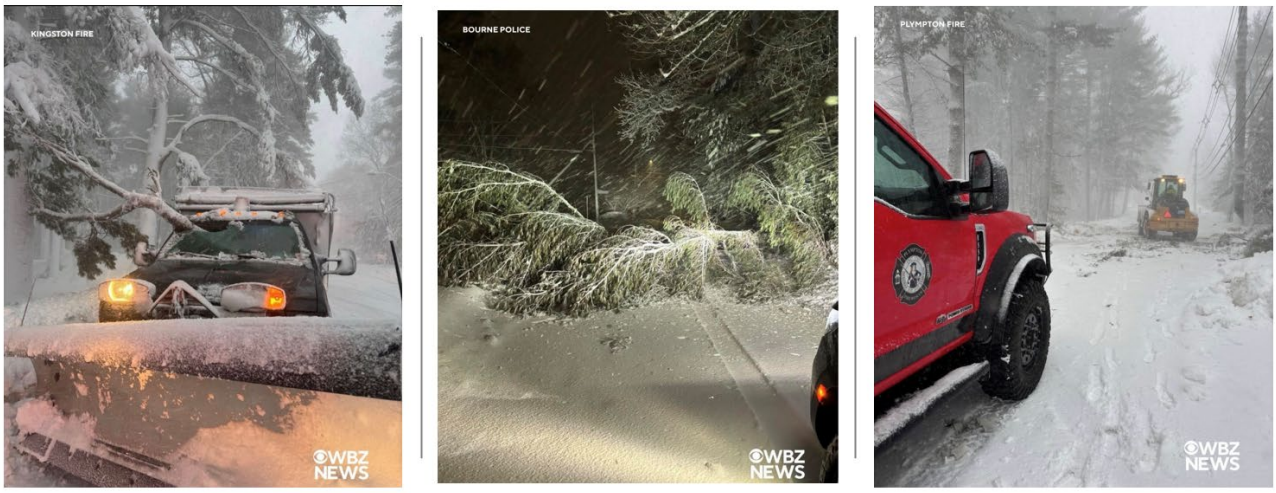

Wind gusts were also higher than initially forecasted, with many areas in the Cape region experiencing near or above hurricane-force wind gusts, including Sandwich with a recorded 72-mph wind gust and Hyannis with a 71-mph wind gust. The highest wind gust impacting the Eversource service territory was 77-mph, reported on Wellfleet at 7:06 a.m. on Monday, February 23rd. Other locations also experienced near hurricane-force wind gusts, including a 65-mph wind gust in the South, demonstrating the widespread nature of the damaging wind gusts.

[10] Mesoscale snow bands are narrow but intense corridors of snowfall within a larger winter storm. These bands concentrate heavier snowfall rates into relatively small areas, producing rapid accumulation rates, reduced visibility, and localized impacts that can differ significantly over short distances.

This level of wind brought significant tree damage across the Southshore and Cape and Islands resulting in the Company both partnering with the local municipal DPWs as well bringing in hundreds of trees crews to help clear roads and remove trees from our electrical infrastructure.



The table below depicts the last forecast from DTN and the observed values for the snowfall and wind gusts.

Region	EEI-Level Predicted Snowfall (Final DTN Forecast)	EEI-Level of Snowfall Observed	Highest Observed Value in Region
West	4	1-3	10 inches
MetroWest	4	3-4	24.1 inches
MetroBoston	4	4	24.1 inches
South	4	5	33 inches
Cape/Martha's Vineyard	4	2-5	20 inches

Table 15. Snowfall forecast verification based on the final DTN weather forecast compared to the observed EEI-levels.

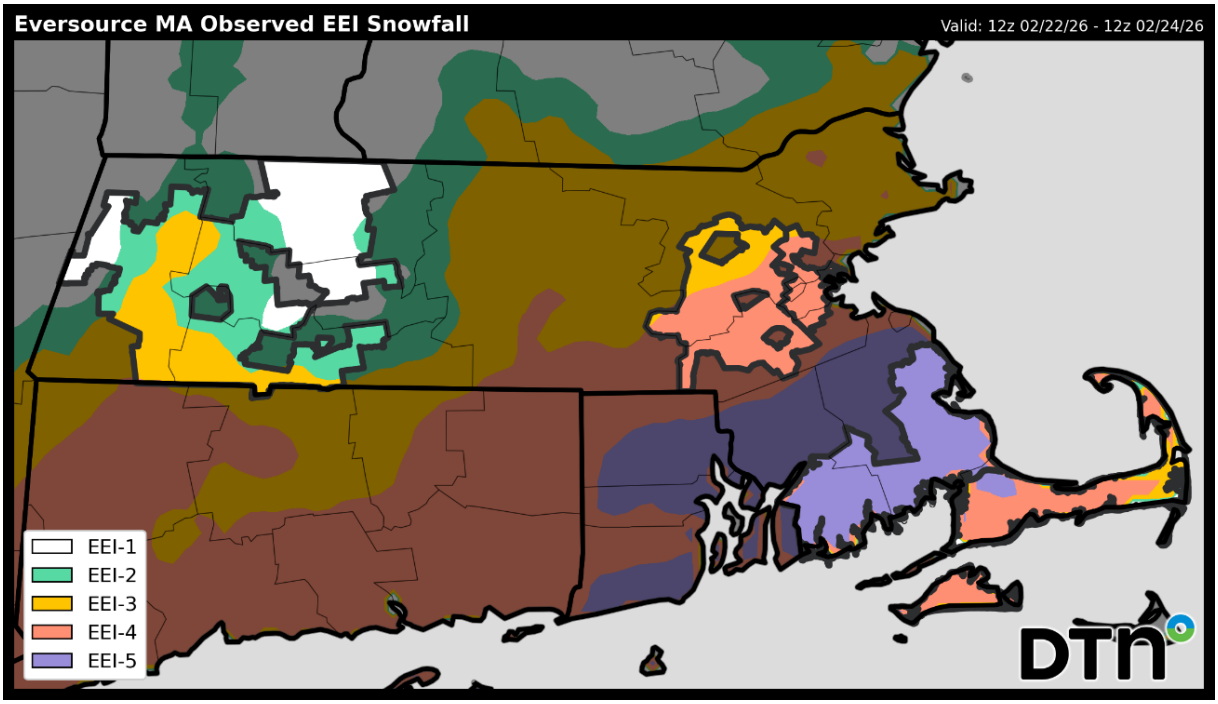


Figure 3. Observed EEI Snowfall across the Commonwealth.

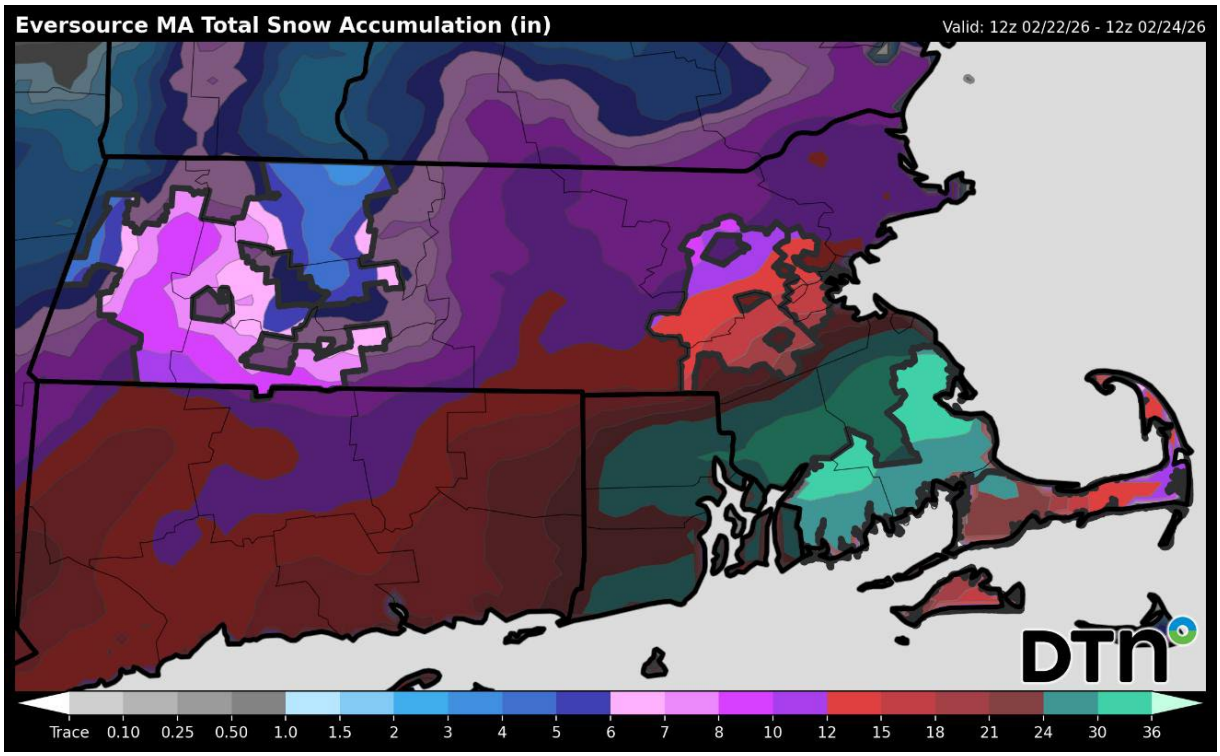


Figure 4. Observed snowfall amounts across the Commonwealth.

Region	EEI-Level Predicted Wind Gusts (Final DTN Forecast)	EEI-Level of Wind Gusts Observed	Highest Observed Value in Region
West	1	1-2	40-50 mph
MetroWest	2	1-2	62 mph
MetroBoston	3	1-2	62 mph
South	3	2-3	65 mph
Cape/Martha's Vineyard	3	3	77 mph

Table 16. Wind gust forecast verification based on the final DTN weather forecast compared to the observed EEI-levels.

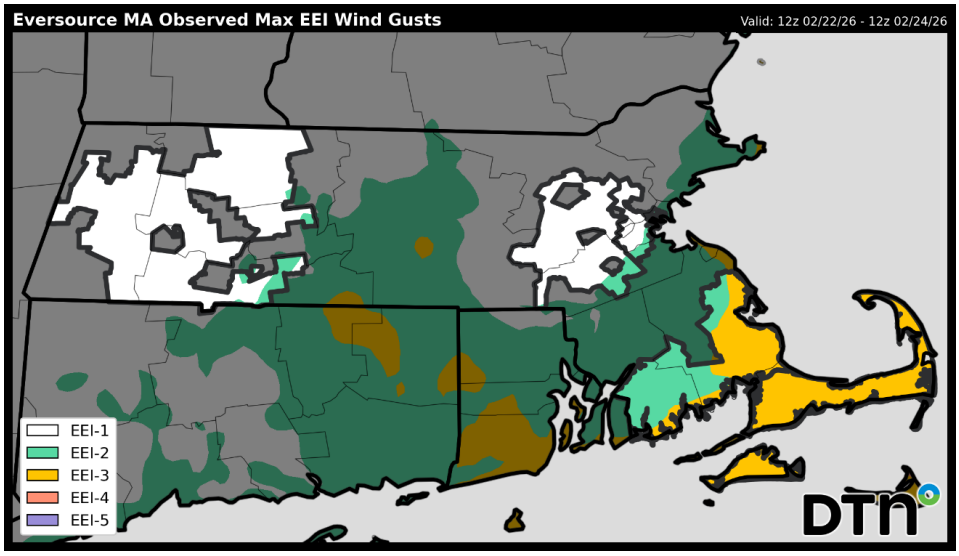


Figure 5. Observed EEI wind gusts across the Commonwealth.

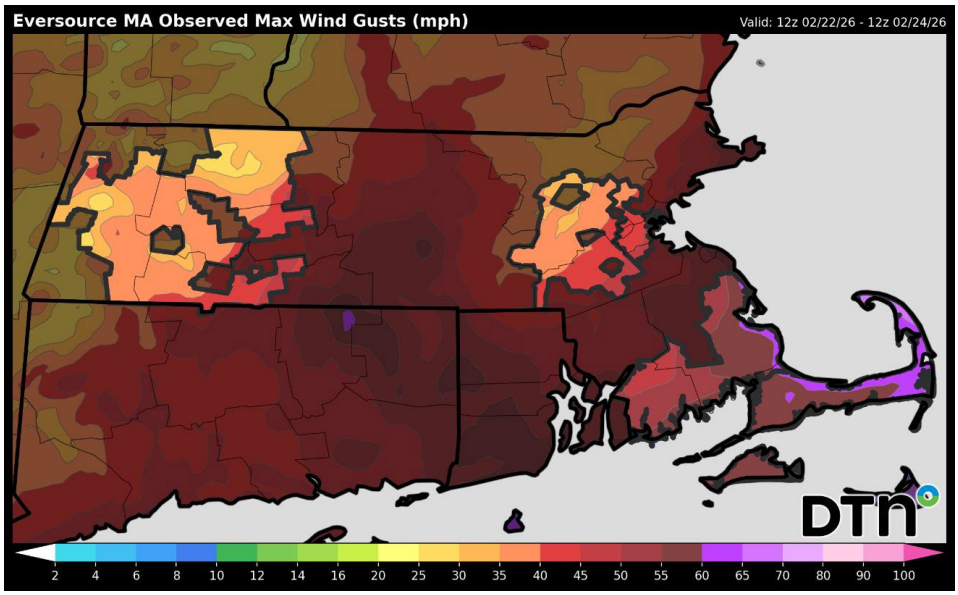


Figure 6. Observed peak wind gusts across the Commonwealth

5 EQUIPMENT DAMAGE

5.1 TRANSMISSION LINES AFFECTED OR BECAME INOPERATIVE

15 transmission lines experienced trouble throughout the duration of the weather event. Of the 15 transmission lines, 13 tripped or reclosed automatically, consistent with system protection design. A total of 21 automatic operations occurred, with multiple operations occurring on Lines 120 and 125. Significant icing and snowpack affected the stations along the coast, including Pilgrim and Canal.

Sustained Outages	
#	**115 kV**
1	LN 119 (Barnstable to Harwich, Lothrop)
2	LN 120 Canal Terminal Only (120 XFMR)
3	LN 121 Canal Terminal Only (121 XFMR)
4	LN 125 (Orleans to Wellfleet)
5	LN 136 (Falmouth Tap to Hatchville, Mashpee)
6	LN 65-502 (Medway to West Walpole)
7	Barnstable SVC Terminal
#	**345 kV**
8	LN 322 (Canal Term) - Manually tied through
9	LN 342 (Pilgrim to Canal & NGRID Auburn ST)
10	LN 355 (Carver to Pilgrim)
11	LN 399 (Carver to W Barnstable)
12	Canal Unit 3 Term (Unit-side of G314 TBD)
13	Pilgrim (725) Old SUT Stub Bus (Bkr 103 trip)
Switched OOS by Dispatch Action – Patrol Trouble Found	
#	**115 kV**
14	LN 114 Section (Acushnet, Wing Lane, Mendall)
15	LN 137 (Mashpee to W Barnstable)
Repeat	LN 65-502 (Medway to W Walpole) - additional work

Table 17. List of transmission lines affected or became inoperative during the blizzard event.

5.2 SUBSTATIONS AFFECTED

28 substations were affected by the blizzard.



BESS_POWER_PLANT_928
BREWSTER_951
BROOK_STREET_727
CHATHAM_914
CRYSTAL_SPRING_646
DUXBURY_738
FALMOUTH_933
HARWICH_968
HATCHVILLE_936
HYANNIS_JUNCTION_961
MANOMET_721
MARSHFIELD_739
MASHPEE_946
NORTH_EASTHAM_962
NORTH_FALMOUTH_967
OAK_STREET_920
ORLEANS_975
OSTERVILLE_913
OTIS_915
PLYMOUTH_733
PROVINCETOWN_E_981
SANDWICH_916
SOUTH_RIVER_730
TREMONT_713
VALLEY_715
WAREHAM_714
WELLFLEET_976
WEST_POND_737

Table 18. A list of the substations that were affected by damages caused by the blizzard.

5.3 Distribution Feeders Affected/Locked Out

Number of distribution feeders affected	**437**
Number of distribution feeders locked out	**36**

Table 19. The number of distribution feeders impacted during the blizzard.

5.4 Number of Broken Poles Replaced

Crews replaced 196 broken poles because of the impacts from the February 2026 Blizzard.













Pole Number	Ownership Full/Joint	Pole Class	Pole Height (ft.)	City	Street	Average Age of Poles (Years)
2/28	FULL	3	40	AQUINNAH	LOBSTERVILLE RD	21
333/148	JOINT	4	40	BARNSTABLE	FALMOUTH RD	22
24/28	JOINT	4	40	BARNSTABLE	CRAIGVILLE-BEACH RD	22
1093/1	JOINT	4	40	BARNSTABLE	NAUSET LANE	22
1557/1	JOINT	4	40	BARNSTABLE	VERMEER CT	22
62/3	JOINT	4	40	BARNSTABLE	BATES ST	22
1435/2	JOINT	4	40	BARNSTABLE	CAPT-CROSBY RD	22
1544/4	JOINT	4	40	BARNSTABLE	ROSA LANE	22
324/3	JOINT	4	35	BARNSTABLE	GROVE ST	22
5/13	JOINT	3	40	BARNSTABLE	HYANNIS RD	22
648/2	JOINT	4	40	BARNSTABLE	FOREST-GLEN RD	22
788/7-5	JOINT	3	40	BARNSTABLE	BAXTER-NECK RD	22
508/2	JOINT	2	35	BOURNE	SOUTH RD	37
144/6	JOINT	2	45	BOURNE	LAKE DR	21
536A/100	JOINT	3	40	BOURNE	COUNTY RD	21
17/111	JOINT	4	40	BOURNE	SOUTH RD	21
455/5	FULL	4	40	BOURNE	ELGIN RD	21
99/4	JOINT	1	45	BOURNE	SCRAGGY-NECK RD	21
500/4	JOINT	4	40	BOURNE	MIDWAY RD	21
192/4	JOINT	3	40	BREWSTER	MITCHELL LANE	27
13/18-5	JOINT	1	45	BREWSTER	RUN-HILL RD	27
3/57-5	JOINT	2	45	BREWSTER	LONG POND RD	27
23/27	JOINT	4	45	BREWSTER	STONEY-BROOK RD	27
236/24	FULL	4	40	BREWSTER	LUND-FARM WAY	24
396/3	FULL	4	35	BREWSTER	VALLEY RD	40
228/1	JOINT	4	40	BREWSTER	SOUTHERN-EAGLE CRT	27
91/3	JOINT	3	45	BREWSTER	BAY-VIEW CIR	27
166/3	FULL	4	35	BREWSTER	HAZEL LANE	40
226/9	JOINT	4	35	BREWSTER	FIDDLER LN	42
70/1	JOINT	4	40	BREWSTER	WEATHERVANES WAY	27
265/19	JOINT	4	40	BREWSTER	LANDING DR	27
36A/782	JOINT	4	45	BREWSTER	MAIN ST	27
386/2	JOINT	5	35	CHATHAM	GLOVER SQ	44
8/1	JOINT	4	40	CHATHAM	FOX-HILL RD	22
220/12	JOINT	4	35	CHATHAM	STRONG-ISLAND RD	44
11/4	JOINT	4	40	CHATHAM	CRESCENT RD	22
163/3	JOINT	2	45	CHATHAM	JEANETTE DR	22
183/2	JOINT	4	40	CHATHAM	BLUEBERRY LANE	22

Pole Number	Ownership Full/Joint	Pole Class	Pole Height (ft.)	City	Street	Average Age of Poles (Years)
386/2	JOINT	5	35	CHATHAM	GLOVER SQ	44
44/13	JOINT	4	35	CHATHAM	BARCLIFF AVE	44
12/4	JOINT	1	40	CHATHAM	SCHOOL ST	22
8/47	JOINT	4	40	CHATHAM	FOX-HILL RD	22
187/1	JOINT	5	35	DENNIS	INDIAN-CHIEF TRL	34
8/73	JOINT	4	40	DENNIS	OLD-BASS-RIVER RD	21
42/25	JOINT	4	40	DENNIS	UPPER-COUNTY RD	21
121/2	JOINT	1	45	DENNIS	S-YARMOUTH RD	21
9200/162	FULL	3	UNKNOWN	DENNIS	EAST-WEST DENNIS RD	UNKNOWN
188/1	JOINT	5	35	DENNIS	INDIAN-CORN TRL	34
26/20	JOINT	4	40	DENNIS	DIVISION ST	21
289/8	JOINT	4	40	DENNIS	GARFIELD LANE	21
9311/195	JOINT	2	50	DUXBURY	PARK ST	22
270/5	JOINT	5	35	EASTHAM	HARMS WAY	43
36/944	JOINT	4	35	EASTHAM	HAY RD	43
9251/44	JOINT	2	45	EASTHAM	GOV-PRENCE RD	26
36/924	JOINT	4	45	EASTHAM	RTE-6	26
24/8	JOINT	4	40	EASTHAM	HERRING-BROOK RD	26
257/7	JOINT	4	40	EASTHAM	PILGRIM LANE	26
345/2	FULL	4	40	EASTHAM	BAIN RD	26
139/7	JOINT	4	35	EASTHAM	UNNAMED ST	43
9280/27	JOINT	2	45	EDGARTOWN	EDGARTN-V-HAVN RD	18
9280/54	JOINT	3	40	EDGARTOWN	EDGARTN-V-HAVN RD	18
65/18	JOINT	4	40	EDGARTOWN	LITCHFIELD RD	18
1/14	JOINT	4	40	EDGARTOWN	S-WATER ST	18
211/2	JOINT	4	40	EDGARTOWN	S-TWELFTH ST	18
376/52	JOINT	4	40	FALMOUTH	PINECREST-BEACH DR	22
108/81	JOINT	4	40	FALMOUTH	QUAKER RD	22
89A/3	JOINT	1	40	FALMOUTH	SCRANTON AVE	22
873/4	JOINT	4	35	FALMOUTH	DARYLANE	36
25/36	JOINT	3	45	FALMOUTH	MAIN ST	22
871/4		5	35	FALMOUTH	DEER POND RD	UNKNOWN
1106/13	JOINT	4	40	FALMOUTH	CLOVERFIELD WAY	22
75/5	JOINT	4	40	FALMOUTH	PRISCILLA ST	22
400/8-5	JOINT	5	35	FALMOUTH	SHOREWOOD DR	36
50/2	JOINT	4	40	HARWICH	DEPOT ROAD WEST	27
186/16-5	JOINT	3	40	HARWICH	LAKEWOOD DR	27
67/63-5	JOINT	1	45	HARWICH	QUEEN-ANNE RD	27

Pole Number	Ownership Full/Joint	Pole Class	Pole Height (ft.)	City	Street	Average Age of Poles (Years)
113/2	JOINT	4	40	HARWICH	RTE-28 RD	27
257/2	JOINT	5	35	HARWICH	CRANBERRY LANE	40
281/3	JOINT	4	40	HARWICH	QUAIL-NEST RUN	27
370/2	FULL	4	40	HARWICH	WAYSIDE RD	26
403/4	FULL	4	40	HARWICH	LAKEWOOD DR	26
431/2	JOINT	3	45	HARWICH	SIXPENNY RD	27
25/18		3	40	HARWICH	SAQUATUCKET PT	UNKNOWN
301/3	FULL	5	40	HARWICH	MARLIN RD	26
301/3	FULL	5	40	HARWICH	MARLIN RD	26
50/22	JOINT	4	40	HARWICH	DEPOT-WEST RD	27
50/7	JOINT	4	40	HARWICH	DEPOT-WEST RD	27
2/12	JOINT	2	45	MARION	CONVERSE RD	18
2/87	JOINT	3	40	MARION	MOORINGS RD	18
4/8	JOINT	3	40	MARION	ALLEN ST	18
318/2	JOINT	4	35	MARION	BARROS DR	31
104/4	JOINT	4	35	MARSHFIELD	ESSEX AVE	40
107/1	JOINT	3	40	MARSHFIELD	FERRY-HILL RD	23
3/17	JOINT	2	45	MARSHFIELD	ACORN ST	23
22/11	JOINT	4	40	MARSHFIELD	CROSS ST	23
107/13	JOINT	4	35	MARSHFIELD	POLLARD ST	40
107/4	JOINT	4	40	MARSHFIELD	FERRY-HILL RD	23
24/178	JOINT	2	45	MARSHFIELD	SUMMER ST	23
204/27	JOINT	4	40	MARSHFIELD	SCHOOL ST	23
326/4	JOINT	3	40	MARSHFIELD	PILGRIM RD	23
217/9	JOINT	4	35	MARSHFIELD	STANDISH ST	40
619/5	JOINT	4	40	MARSHFIELD	MORITZ RD	23
77/2	JOINT	4	40	MARSHFIELD	BRUNSWICK ST	23
53/14		4	40	MASHPEE	MASHPEE-NECK RD	UNKNOWN
31/17	JOINT	4	40	MASHPEE	WADING-PLACE RD	20
10/12	JOINT	4	35	MASHPEE	SECONSET-PT RD	40
293/15	JOINT	4	35	MASHPEE	SIMONS-NARROWS RD	40
255/4	FULL	5	35	ORLEANS	UNC-ISRAEL RD	32
102/1	JOINT	4	35	ORLEANS	CRANBERRY LANE	40
82/2	JOINT	5	35	ORLEANS	VIKING RD	40
4/272	JOINT	2	40	ORLEANS	S-ORLEANS RD	14
70/22	JOINT	3	40	ORLEANS	NAMEQUOIT RD	14
4/314	JOINT	2	40	ORLEANS	S-ORLEANS RD	14
4/253	JOINT	4	40	ORLEANS	S-ORLEANS RD	14
14/22	JOINT	4	40	ORLEANS	GREAT-OAK RD	14

Pole Number	Ownership Full/Joint	Pole Class	Pole Height (ft.)	City	Street	Average Age of Poles (Years)
70/13	JOINT	1	50	ORLEANS	NAMEQUOIT RD	14
21/9	JOINT	3	40	ORLEANS	WEST RD	14
4/287-5	JOINT	UNKNOWN	UNKNOWN	ORLEANS	HARWICH RD	UNKNOWN
3/30	JOINT	4	40	ORLEANS	TONSET RD	14
17/77-A	JOINT	4	40	ORLEANS	MAIN ST	14
286/P5		4	35	ORLEANS	TAYLOR WAY	UNKNOWN
126/3	JOINT	4	40	ORLEANS	LUCY LANE	14
70/23	JOINT	2	40	ORLEANS	NAMEQUOIT RD	14
135/18	JOINT	3	40	ORLEANS	NAUSET-HEIGHTS RD	14
150/15	FULL	4	35	ORLEANS	LAKE DR	32
150/14	FULL	4	40	ORLEANS	LAKE DR	23
150/18	FULL	4	40	ORLEANS	BOULDER LANE	23
150/17	FULL	4	35	ORLEANS	LAKE DR	32
150/12	FULL	4	40	ORLEANS	LAKE DR	23
306/2	FULL	4	35	ORLEANS	WESTWOOD DR	32
70/12	JOINT	2	45	ORLEANS	NAMEQUOIT RD	14
9304/113A	FULL	1	65	PLYMOUTH	MINUTEMAN LN	18
764/18		3	40	PLYMOUTH	OAK ST	UNKNOWN
11/45	JOINT	4	40	PLYMOUTH	BARTLETT RD	18
382/6-A	JOINT	1	40	PLYMOUTH	PHOENIX CT	18
1019/3	JOINT	4	40	PLYMOUTH	WAREHAM RD	18
1538/16	JOINT	4	35	PLYMOUTH	TOWER HILL FARM RD	29
382/12	JOINT	2	45	PLYMOUTH	COURT ST	18
293/1	JOINT	1	45	PLYMOUTH	BREWSTER ST	18
293/1	JOINT	1	45	PLYMOUTH	BREWSTER ST	18
7/26	JOINT	4	40	PLYMPTON	MAYFLOWER RD	21
2/45	JOINT	3	40	PTOWN	BRADFORD ST	21
9255/473	JOINT	1	45	PTOWN	RTE-6	21
36/1974	JOINT	2	45	PTOWN	COMMERCIAL ST	21
58/2	JOINT	2	40	PTOWN	JOHNSON ST	21
20/20	JOINT	4	40	SANDWICH	GROVE ST	23
14/82	JOINT	4	40	SANDWICH	RTE-6A	23
262/P2		5	30	SANDWICH	KITTREDGE POINT RD	UNKNOWN
336/6	JOINT	4	40	SANDWICH	SERVICE RD	23
74/17		4	40	SANDWICH	FREEMAN AVE	UNKNOWN
8/45	JOINT	2	45	SANDWICH	FARMERSVILLE RD	23
6/8	JOINT	3	40	SANDWICH	STOWE RD	23
19/10	JOINT	1	45	TRURO	N-PAMET RD	24
60/1	JOINT	4	35	TRURO	COAST-GUARD RD	35

Pole Number	Ownership Full/Joint	Pole Class	Pole Height (ft.)	City	Street	Average Age of Poles (Years)
36/1442	JOINT	1	55	TRURO	TRURO-CENTER RD	24
284/3-5	JOINT	4	40	TRURO	GREAT-HOLLOW RD	24
385/1	JOINT	4	40	TRURO	OLD-GREAT-HOLLOW RD	24
9255/325		1	45	TRURO	SHORE RD	UNKNOWN
81/8		5	35	TRURO	UNNAMED ST	UNKNOWN
42/P3		4	30	TRURO	PERRYS-HILL WAY	UNKNOWN
9255/385	FULL	4	40	TRURO	SHORE RD	21
467/18	JOINT	3	40	WAREHAM	WAREHAM-LK-SHORE DR	20
627/P2		4	40	WAREHAM	UNNAMED RD	UNKNOWN
189/3	JOINT	5	35	WELLFLEET	PARKINGTON-HILL RD	47
25/5	JOINT	4	40	WELLFLEET	KENDRICK AVE	21
36/1275	JOINT	3	40	WELLFLEET	MAIN ST	21
76/1	JOINT	3	40	WELLFLEET	WEST RD	21
36/1128	JOINT	3	45	WELLFLEET	RTE-6	21
36/1132	JOINT	3	45	WELLFLEET	RTE-6	21
65/11	JOINT	3	45	WELLFLEET	LT-ISLAN RD	21
119/3	JOINT	3	30	WELLFLEET	BARKER AVE	47
205/P1		2	40	WELLFLEET	UNNAMED ST	UNKNOWN
36/1256	JOINT	1	45	WELLFLEET	RTE-6	21
9200/141	FULL	2	45	YARMOUTH	OLD SAGA DR	21
201/3	JOINT	4	35	YARMOUTH	OLD-CHURCH ST	35
333/1	JOINT	5	35	YARMOUTH	NAVAJO RD	35
536/3	JOINT	4	40	YARMOUTH	WINSOME RD	24
796/2	JOINT	4	40	YARMOUTH	ANCHORAGE LANE	24
90/1	JOINT	6	35	YARMOUTH	BOSTON AVE	35
391/6	JOINT	4	40	YARMOUTH	CAPT-SMALL RD	24
692/9	JOINT	4	40	YARMOUTH	DRIVING-TEE CIR	24
9215/39-5	JOINT	4	40	YARMOUTH	N-DENNIS RD	24
14/13	JOINT	4	40	YARMOUTH	BAXTER AVE	24
677/11	FULL	4	35	YARMOUTH	NORTON RD	38

5.5 Number of Feet of Primary and Secondary Conductoring Replaced

Throughout the event, crews utilized 289,057 feet of wire and 53,713 feet of cable to make repairs.



Below is a table that describes the net amount, the size, and type of wiring and cable used during the restoration efforts.

Commodity	Row Labels	Sum of Cable Used (feet)	Sum of Wire Used (feet)
Cable	CABLE, 350 KCMIL, 37 STR, 5 KV, 40 FT LG COIL, 115 MILS EPR INSULATED, CSPE JACKET	1530	
Cable	CABLE, 500 KCMIL, 600 V, 40 FT LG COIL, EPR INSULATED, CSPE JACKET, CU	120	
Cable	CABLE, BARE, /AW, 795 KCMIL, ALUMOWELD, 5000 FT REEL, COOT, ACSR	250	
Cable	CABLE, BARE, ACSR/AW, 1/0 AWG, RAVEN, 6095 FT/REEL	500	
Cable	CABLE, BARE, GUY WIRE, 0.363, 125 FT LG COIL, ALUMOWELD, 14M	8750	
Cable	CABLE, BARE, GUY WIRE, 18M, B416-93, ALUMOWELD, AL CLAD STEEL, 125 FT COIL, THIS REPLACED S/C 177656	7500	
Cable	CABLE, COVERED, #4 AWG, MEDIUM HARD DRAWN CU, USE AS TAP WIRE, TRANSFORMER LEAD, REPAIR EXISTING #4 PRIMARY / GROUND WIRE	2970	
Cable	CABLE, INSULATED, UG, #4 AWG, 600 V, EPR INSULATED, CU, 1000 FT/REEL, Cable	1018	
Cable	CABLE, INSULATED, UG, 3CT, 4/0 AWG, 600 V, EPR INSULATED, CU, 2000 FT/REEL, Cable	300	
Cable	CABLE, INSULATED, UG, 4/0 AWG, 600 V, EPR INSULATED, CU, 1,000 FT/WOOD REEL, Cable	175	

Commodity	Row Labels	Sum of Cable Used (feet)	Sum of Wire Used (feet)
Cable	CABLE, SERVICE ENTRANCE UTILITY, 4/0 AWG, AL	500	
Cable	CABLE, SERVICE TRIPLEX, #2 AWG, 600 V, XLPE INSULATED, AL ALLOY, 300 FT/Reel, SHRIMP	30000	
Cable	CABLE, UG, TRIPLEX, 1/0 AWG, 25 KV, W/ FULL NEUTRAL, 260 MILS EPR INSULATED, JACKETED, AL, 1,600 FT / Reel	100	
Wire	WIRE, 600 V, CU, WIRE, # 2, 7 STR, MEDIUM HARD DRAWN, 60MIL POLY COVERED, 50 FT COIL		26461
Wire	WIRE, COMPRESSED, 1/C, 4/0, 37 STR, 5 KV, 115 MIL EPR INSULATED, 20 FT COIL, CSPE INSULATED, NO JACKET		640
Wire	WIRE, COVERED TIE, INSULATED, AL, 250 FT SPOOL, # 4 SOLID, TPR		750
Wire	WIRE,ELECTRICAL, #2 AWG, 7 STR, 60 MIL POLY JACKETED, HARD-DRAWN CU, 110 FT COIL, SAME AS C-121, Wire		13750
Wire	WIRE,ELECTRICAL, #4 AWG, SOLID, 30 MIL POLY COVERED JACKETED, HARD-DRAWN CU, COIL		567
Wire	WIRE,ELECTRICAL, #4, 7 STR, 600 V, 60 MIL INSULATED, MEDIUM-HARD DRAWN CU, 200 FT COIL		-2800
Wire	WIRE,ELECTRICAL, 1/0 AWG AAAC, 7 STR, 6201 AL ALLOY, 200 FT COIL, PART OF ERP WIRE KIT 584853		65150
Wire	WIRE,ELECTRICAL, 1/0, 19 STR, 600 V, 60 MIL INSULATED, POLY COVERED JACKETED, SOFT-DRAWN CU, 50 FT COIL		1950
Wire	WIRE,ELECTRICAL, 4/0, 19 STR, 600 V, 60 MIL INSULATED, POLY COVERED JACKETED, CU, 50 FT COIL		5520
Wire	WIRE,ELECTRICAL, BARE TIE, #4, SOLID, SOFT-DRAWN AL, 250 FT SPOOL		68750
Wire	WIRE,ELECTRICAL, BARE TIE, #6, SOLID, SOFT-DRAWN CU, 315 FT PLASTIC SPOOL		73080
Wire	WIRE,ELECTRICAL, BARE, "CORE/AW", "PELICAN/AW", 477 AWG ACSR, 18/1 STR, ALUMOWELD, 4000 FT REEL, USE 580282 FIRST, Wire		350

Commodity	Row Labels	Sum of Cable Used (feet)	Sum of Wire Used (feet)
Wire	WIRE,ELECTRICAL, BARE, #4 AWG, SOLID, TINNED, CU, 3000 FT Reel		20
Wire	WIRE,ELECTRICAL, BARE, 1/0 AWG, 7 STR, 325.7 LB/MFT, HARD-DRAWN CU		140
Wire	WIRE,ELECTRICAL, BARE, 1/0 AWG, 7 STR, HARD-DRAWN CU, COIL, K61		304
Wire	WIRE,ELECTRICAL, BARE, 3/0 AWG AAAC, 7 STR, 6201 AL ALLOY, REPLACED BY 576132		25900
Wire	WIRE,ELECTRICAL, BARE, DOVE, 556.5 KCMIL ACSS, 26/7 STR, 0.927 DIA		400
Wire	WIRE,ELECTRICAL, BARE, TIE, #4 AWG, SOLID, SOFT-DRAWN CU, 200 FT PLASTIC SPOOL		1000
Wire	WIRE,ELECTRICAL, BONDING, 1/0 AWG, 19 STR, TINNED, SOFT-DRAWN CU, 1500 FT WOOD REEL		465
Wire	WIRE,ELECTRICAL, LINE, 1/0 AWG, 7 STR, 60 MIL INSULATED, POLY JACKETED, SOFT DRAWN CU, 150 FT COIL		6660
	Grand Total	**53713**	**289057**

Table 20. A list of the amount and type of cable and wire used for restoration efforts.

5.6 Number of Feet of Follow Up Conductoring Remaining

All reconductoring, if necessary, was completed during the restoration phase of the response to the February 2026 Blizzard.

5.7 Number of Damaged Transformers

There were 122 transformers that were damaged during the February 2026 Blizzard. The table below shows the age, type, size, and location of the damaged transformers.

City	Street	Pole #	Size (kVA)	Type	Age (Years)
AQUINNAH	LOBSTERVILLE RD	2/28	25	Single-Phase	12
BARNSTABLE	NAUSET LN	1093/1	25	Single-Phase	28
BARNSTABLE	VERMEER CT	1557/1	50	Single-Phase	11
BARNSTABLE	BATES ST	62/3	25	Single-Phase	54
BARNSTABLE	CAPT-CROSBY RD	1435/2	25	Single-Phase	44
BARNSTABLE	ROSA LN	1544/4	25	Single-Phase	19
BARNSTABLE	GROVE ST	324/3	10	Single-Phase	52
BARNSTABLE	HYANNIS RD	5/13	25	Single-Phase	48
BARNSTABLE	FOREST-GLEN RD	648/2	25	Single-Phase	54
BARNSTABLE	UNNAMED ST	10482/020	25	Single-Phase	39
BOURNE	MIDWAY RD	500/4	25	Single-Phase	52
BREWSTER	LUND-FARM WAY	236/24	50	Single-Phase	37
BREWSTER	VALLEY RD	396/3	25	Single-Phase	54
BREWSTER	SOUTHERN-EAGLE CRT	228/1	30	Three-Phase	35
BREWSTER	BAY-VIEW CIR	91/3	150	Three-Phase	37
BREWSTER	HAZEL LN	166/3	25	Two-Phase	53
BREWSTER	FIDDLER LN	226/9	50	Two-Phase	56
BREWSTER	WEATHERVANES WAY	70/1	15	Two-Phase	70
BREWSTER	LANDING DR	265/19	25	Single-Phase	36
BREWSTER	MAIN ST	36A/782	25	Single-Phase	37
CHATHAM	JEANETTE RD	163/3	50	Single-Phase	37
CHATHAM	BLUEBERRY LANE	183/2	38	Single-Phase	58
CHATHAM	GLOVER SQ	386/2	25	Single-Phase	34
CHATHAM	CRANBERRY KNL	44/13	37	Single-Phase	55
CHATHAM	CRANBERRY KNL	44/13	37	Single-Phase	55
CHATHAM	SCHOOL ST	12/4	50	Single-Phase	95

CHATHAM	FOX-HILL RD	8/47	50	Single-Phase	16
DENNIS	INDIAN-CORN TRL	188/1	25	Single-Phase	41
DENNIS	DIVISION ST	26/20	15	Single-Phase	58
DENNIS	GARFIELD LN	289/8	50	Single-Phase	33
DUXBURY	PARK ST	9311/195	25	Single-Phase	36
EASTHAM	HERRING-BROOK RD	24/8	25	Single-Phase	45
EASTHAM	PILGRIM LN	257/7	50	Single-Phase	58
EASTHAM	BAIN RD	345/2	25	Single-Phase	47
EASTHAM	CUMMINGS RD	139/7	10	Two-Phase	19
EDGARTOWN	S-WATER ST	1/14:S	75	Single-Phase	21
EDGARTOWN	S-TWELFTH ST	211/2	25	Single-Phase	52
FALMOUTH	SCRANTON AVE	89A/3	50	Single-Phase	12
FALMOUTH	DARYLANE	873/4	25	Two-Phase	56
FALMOUTH	MAIN ST	25/36	30	Three-Phase	57
FALMOUTH	DEER POND RD	871/4	25	Two-Phase	68
FALMOUTH	CLOVERFIELD WAY	1106/13	25	Single-Phase	25
FALMOUTH	PRISCILLA ST	75/5	50	Single-Phase	19
FALMOUTH	SHOREWOOD DR	400/8-5	50	Two-Phase	13
HARWICH	CRANBERRY LN	257/2	25	Single-Phase	57
HARWICH	QUAIL-NEST RUN	281/3	37	Single-Phase	19
HARWICH	WAYSIDE RD	370/2	25	Single-Phase	111
HARWICH	LAKEWOOD DR	403/4	25	Single-Phase	58
HARWICH	SIXPENNY RD	431/2	25	Single-Phase	58
HARWICH	SAQUATUCKET PT	25/18	75	Single-Phase	16
HARWICH	SAQUATUCKET PT	25/18	75	Single-Phase	16
HARWICH	MARLIN RD	301/3	10	Single-Phase	30
HARWICH	MARLIN RD	301/3	10	Single-Phase	30
HARWICH	DEPOT-WEST RD	50/22	50	Single-Phase	37

HARWICH	DEPOT-WEST RD	50/7	38	Single-Phase	19
MARION	MOORINGS RD	2/87	50	Single-Phase	16
MARION	ALLEN ST	4/8	50	Single-Phase	10
MARION	BARROS DR	318/2	50	Single-Phase	119
MARSHFIELD	POLLARD ST	107/13	25	Single-Phase	63
MARSHFIELD	FERRY-HILL RD	107/4	25	Single-Phase	42
MARSHFIELD	SUMMER ST	24/178	38	Single-Phase	20
MARSHFIELD	SCHOOL ST	204/27	25	Single-Phase	53
MARSHFIELD	PILGRIM RD	326/4	25	Single-Phase	35
MARSHFIELD	STANDISH ST	217/9	50	Single-Phase	7
MARSHFIELD	MORITZ RD	619/5	25	Single-Phase	56
MARSHFIELD	BRUNSWICK ST	77/2	25	Single-Phase	46
MASHPEE	WADING-PLACE RD	31/17	25	Single-Phase	31
MASHPEE	SECONSET-PT RD	10/12	25	Two-Phase	57
MASHPEE	SIMONS-NARROWS RD	293/15	25	Single-Phase	58
ORLEANS	MAIN ST	17/77-A	100	Two-Phase	39
ORLEANS	TAYLOR WAY	286/P5	75	Three-Phase	28
ORLEANS	LUCY LN	126/3	25	Two-Phase	43
ORLEANS	NAMEQUOIT RD	70/23	25	Two-Phase	107
ORLEANS	NAUSET-HEIGHTS RD	135/18	25	Single-Phase	48
ORLEANS	NAUSET-HEIGHTS RD	135/18	25	Single-Phase	48
ORLEANS	LAKE DR	150/17	50	Single-Phase	13
ORLEANS	LAKE DR	150/12	25	Single-Phase	54
ORLEANS	WESTWOOD DR	306/2	25	Single-Phase	54
ORLEANS	NAMEQUOIT RD	70/12	50	Single-Phase	33
PLYMOUTH	OAK ST	764/18	25	Single-Phase	12
PLYMOUTH	OAK ST	764/18	25	Single-Phase	12
PLYMOUTH	BARTLETT RD	11/45	50	Single-Phase	9

PLYMOUTH	PHOENIX CT	382/6-A	50	Single-Phase	26
PLYMOUTH	WAREHAM RD	1019/3	25	Single-Phase	58
PLYMOUTH	UNNAMED ST	1538/16	25	Single-Phase	8
PLYMOUTH	COURT ST	382/12	50	Single-Phase	1
PLYMOUTH	BREWSTER ST	10454/010	500	Three-Phase	6
PLYMOUTH	BREWSTER ST	10454/010	500	Three-Phase	6
PLYMPTON	MAYFLOWER RD	7/26	50	Single-Phase	2
PROVINCETOWN	COMMERCIAL ST	36/1974	25	Single-Phase	35
PROVINCETOWN	JOHNSON ST	58/2	50	Single-Phase	25
SANDWICH	RTE-6A	14/82	25	Single-Phase	31
SANDWICH	KITTREDGE POINT RD	262/P2	10	Single-Phase	60
SANDWICH	SERVICE RD	336/6	25	Single-Phase	40
SANDWICH	FREEMAN AVE	74/17	50	Single-Phase	13
SANDWICH	FARMERSVILLE RD	8/45	50	Single-Phase	12
SANDWICH	STOWE RD	58/2	50	Single-Phase	1
TRURO	GREAT-HOLLOW RD	284/3-5	38	Single-Phase	16
TRURO	OLD-GREAT-HOLLOW RD	385/1	25	Single-Phase	59
TRURO	SHORE RD	9255/325	50	Single-Phase	20
TRURO	UNNAMED ST	81/8	25	Two-Phase	42
TRURO	PERRYS-HILL WAY	42/P3	25	Single-Phase	56
TRURO	SHORE RD	9255/385	75	Single-Phase	30
WAREHAM	UNNAMED ST	627/P2	25	Single-Phase	39
WELLFLEET	BARKER AVE	119/3	50	Two-Phase	19
WELLFLEET	UNNAMED ST	205/P1	25	Single-Phase	35
WELLFLEET	RTE-6	36/1256	25	Single-Phase	22
YARMOUTH	OLD-CHURCH ST	201/3	25	Single-Phase	39
YARMOUTH	NAVAJO RD	333/1	38	Single-Phase	19

YARMOUTH	WINSOME RD	536/3	50	Single-Phase	46
YARMOUTH	ANCHORAGE LN	796/2	25	Single-Phase	55
YARMOUTH	BOSTON AVE	90/1	25	Single-Phase	47
YARMOUTH	CAPT-SMALL RD	391/6	50	Single-Phase	10
YARMOUTH	DRIVING-TEE CIR	692/9	50	Single-Phase	58
YARMOUTH	N-DENNIS RD	9215/39-5	25	Single-Phase	42
YARMOUTH	BAXTER AVE	14/13	25	Single-Phase	36
YARMOUTH	HIGGINS-CROWELL RD	10272/020	150	Three-Phase	16

Table 21. A list of the transformers damaged during the February 23, 2026 Blizzard.

5.8 Availability of Replacement Transformers

Before, during, and after the February 23, 2026 Blizzard, Eversource had an ample supply of distribution transformers within its inventories at area work centers.

5.9 Switching Necessary to Re-Route Power

Switching for re-routing power and sectionalizing was adequate during the February 23, 2026 Blizzard and the related restoration period.

6 Trouble Order System

During February 2026 Blizzard, there were 11,941 trouble orders, with no issues encountered in the Outage Management System ("OMS") or Eversource.com. Throughout the event, there was sufficient manpower to operate the system.

7 WIRES-DOWN OPERATIONS

The table below shows the number of FPS 1, 2, 3, and non-priority ("N") calls reported during the February 2026 Blizzard. The Company leveraged and utilized all resources, including, but not limited to Line crews, Tree crews, Troubleshooters, and Wire Guards to respond to and mitigate public safety calls. The Company also utilized Community Liaisons to work with the affected communities to prioritize response to public safety events.

Wires-Down Operations	
Total number of Priority wires-down calls by priority level	**FPS1 = 23** **FPS2 = 598** **FPS3 = 1,099**
For each day of the event and restoration period include; outstanding priority wires-down calls by priority level, completed priority wires-down calls by priority level	**See Excel included with report**
Summary of priority wires-down response	**See Excel, Table 4-B, included with report**
Number of non-priority wires-down calls	**FPSN = 415**

Table 22. A list of the priority wires-down calls responded to during the February 2026 Blizzard


Event Name	Day / Restoration Period	Priority Level (1, 2, or3)	Outstanding Priority Calls	Completed Priority Calls
February 2026 blizzard	2/23/2026	01	14	14
		02	323	148
		03	563	137
February 2026 blizzard	2/24/2026	01	3	3
		02	112	232
		03	239	450
February 2026 blizzard	2/25/2026	01	3	3
		02	98	128
		03	161	293
February 2026 blizzard	2/26/2026	01	2	2
		02	46	67
		03	77	152
February 2026 blizzard	2/27/2026	01	0	0
		02	11	14
		03	32	35
February 2026 blizzard	2/28/2026	01	0	0
		02	3	4
		03	14	19
February 2026 blizzard	3/1/2026	01	1	1
		02	3	3
		03	6	6
February 2026 blizzard	3/2/2026	01	0	0
		02	2	2
		03	7	7

8 CREW SUPPLEMENTS

8.1 CREW ACQUISITION, BY TYPE, AND DAILY CREW AVAILABILITY

Date	Internal Crews	Trouble Crews	External Primary Crews	Tree Crews	Damage Assessors	Wire Down	Contract Service	Service Crews	Total
2/22/2026	105	92	519	175	195	65	20	-	1,171
2/23/2026	166	94	891	205	195	195	60	15	1,821
2/24/2026	171	94	969	308	287	147	90	20	2,086
2/25/2026	270	93	1,132	325	286	137	93	20	2,356
2/26/2026	272	93	1,149	328	284	139	162	21	2,448
2/27/2026	271	93	1,087	328	185	89	162	21	2,236
2/28/2026	100	93	100	71	35	-	-	-	399
3/1/2026	100	93	100	71	30	-	-	-	394

Table 23. The types of crews utilized each day of the Emergency event.

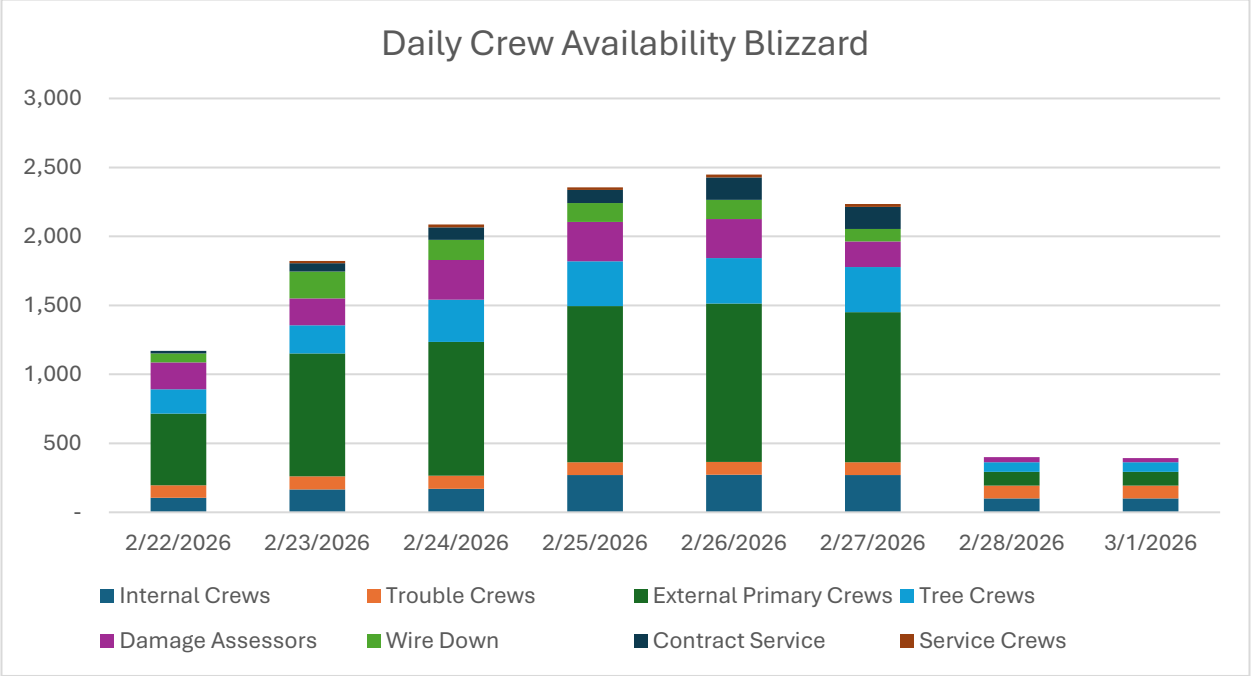

A visual representation of the type and number of crews utilized each day of the Emergency event.

8.2 Number and Type of Crews From Outside the Company

Contractor	Crew Type	# of Crews	# FTEs
Alliance - Gamble	PRI	10	24
Alliance - Gamble	PRI	8	19
Alliance - Richardson	PRI	8	20
Asplundh - Byers	PRI	5	11
Asplundh - Curtis	PRI	5	14
Asplundh - Drake	PRI	8	21
Asplundh - Lavallee	PRI	3	9
Asplundh - Morris	PRI	4	10
Asplundh - O'Malley	PRI	3	7
Asplundh - Shepler	PRI	17	40
Asplundh - Windell	PRI	6	15
Asplundh - Young	PRI	5	13
Bailey and Bailey - Dickinson	PRI	13	32
Bailey and Bailey - Tiller	PRI	13	32
Bird Electric - Brooks	SEC	14	35
Central CT Cable - Belanger	SEC	9	24
Conexus - Albert	PRI	9	22
Conexus - Dixon	PRI	5	11
Conexus - Rewis	PRI	10	29
Connexus - Andres	PRI	8	25
Connexus - Flory Line - Forkey	PRI	10	30
Connexus - Kumiega	PRI	5	15
Connexus - Sandoval	PRI	8	21
Control Point - Hutchinson	DA	6	11
Creative Surveying - Bourhiller	PRI	5	15
CSR - Eason	WG	9	9
CSR - Ferro - Bradshaw	PRI	9	27
CSR - Forester	PRI	11	31
CSR - Maxwell	WG	11	11
CT - Internal Support	PRI-E	102	
D&D - Beaulieu	PRI	2	5
D&D - Ciesluk	PRI	2	5
D&D - Morello	PRI	3	7
Danella - Atwood	SEC	13	29
Divergent Alliance - Childers	PRI	5	13
Divergent Alliance - Gleason	PRI	7	19
Divergent Alliance - Joyce	PRI	6	13
Divergent Alliance - Ray	PRI	8	23

Contractor	Crew Type	# of Crews	# FTEs
Divergent Alliance - Stull	PRI	4	13
East Coast Power - Rippel	PRI	3	11
EJ Electric - Andrychowski	PRI	1	4
EJ Electric - Thrope	PRI	8	20
EJ Electric - Winoski	PRI	2	7
Elecnor Hawkeye - Grubb	PRI	10	26
Elecnor Hawkeye - Meachem	PRI	10	25
Elecnor Hawkeye - Pitts	PRI	10	24
Elecnor Hawkeye - Sam Nagle	PRI	7	23
Elecnor Hawkeye -Luke Nagle	PRI	2	5
Ferrerira - Jackson	PRI	6	14
Gagnon - Bruneau	PRI	9	28
Gagnon - Marseille	PRI	5	14
Gagnon - Meagher	PRI	10	27
Gagnon - Mockler	PRI	12	34
GMB - Handley	PRI	9	27
GMB - Meade	PRI	11	28
GMB - Wynne	PRI	5	14
GMB Powerline - Cash	PRI	8	23
Grattan - Harbeson	PRI	12	32
Grattan - Hemenway	PRI	6	16
Grattan - LaRock	PRI	12	31
Gratten - Knapp	PRI	12	31
Haugland - Dupal	PRI	10	25
Haugland - Roberts	PRI	2	7
Haugland - Santiago	PRI	9	20
Holland - Michaud	PRI	10	31
Holland - Plouffe	PRI	9	29
Holland - Waye	PRI	10	29
IB Abel - Fanelli	PRI	13	36
Jalbear Brothers - Perkins	PRI	6	17
Jalbear Brothers - Jalbert	PRI	6	18
KR Utilities - Caswell	PRI	10	27
KR Utilities - Frost	PRI	9	29
KR Utilities - Hernandez	PRI	15	34
KR Utilities - Mckee	PRI	5	25
Levessesure - Cote	SEC	8	17
LongChamps - Beauregard	SEC	4	8
Mass Bay - Measha w	PRI	6	15
Maverick - Hoban	WG	13	13

Contractor	Crew Type	# of Crews	# FTEs
Maverick - McElvaney	SEC	8	20
Maverick - McNally	DA	13	26
Maverick - Scott	DA	11	22
Maverick - Shuler	WG	11	11
McPhee - Ciesla	PRI	5	18
Mesa Associates	DRONE	1	2
Michels - Dowling	PRI	4	21
Michels - Landmark	PRI	7	19
Michels - Lavellee	PRI	13	40
Michels - Maynard	PRI	8	20
Michels - Turcotte	TX	13	39
Midcon - Wyrick	PRI	8	20
MTV - Amara	PRI	6	20
MTV - Blouin	PRI	2	4
MTV - Brennan	PRI	8	22
MTV - Childers	PRI	5	15
MTV - Comer	PRI	10	25
MTV - Costa	PRI	5	16
MTV - Crislip	SEC	10	22
MTV - Criswell	PRI	10	30
MTV - Crozier	PRI	8	21
MTV - Dambra	PRI	8	26
MTV - Fournier	PRI	5	11
MTV - Greer	PRI	10	24
MTV - Gyorick	PRI	10	21
MTV - Harris	PRI	8	22
MTV - Humbert	PRI	9	27
MTV - Justice	SEC	15	35
MTV - Kevin Smith	PRI	10	28
MTV - Kilrain	PRI	5	15
MTV - Mansfield	SEC	10	22
MTV - Massey	SEC	10	26
MTV - Matt Smith	PRI	12	35
MTV - McDermott	PRI	10	28
MTV - McGaffigan	PRI	10	27
MTV - McGaffigan	PRI	15	43
MTV - Merner	PRI	11	32
MTV - Ming	PRI	14	40
MTV - Morrow	PRI	10	30
MTV - Oleary	SEC	6	14

Contractor	Crew Type	# of Crews	# FTEs
MTV - Paluzzi	PRI	11	27
MTV - Reed	PRI	11	30
MTV - Schatz	SEC	2	4
MTV - Serrels	SEC	9	20
MTV - Sharpe	PRI	15	44
MTV - Sullivan	PRI	10	29
MTV - Turner	SEC	9	20
MTV -Minarich	PRI	10	25
Mulleavey Electric - Mulleavey	SEC	2	4
NH - Co OP - Troian	PRI	6	14
NH - Internal Support	PRI-E	57	
NH - RMT	PRI	33	
Nooter - Araujo	PRI	10	35
Nooter - Skelton	PRI	12	37
Northline - Bruneau	PRI	12	35
Northline - Lefort	PRI	13	28
Northline - Patonie	PRI	11	26
One Source - Hall	PRI	13	35
One Source - LaRue	PRI	14	36
One Source - Robinson	PRI	10	26
One Source- Lewis	PRI	15	37
Orion - Dubois	PRI	7	24
Orion - Johnson	PRI	10	25
OSR - Atlanta	DA	4	8
OSR - Canton	DA	9	18
OSR - Charlottesville	DA	10	21
OSR - Cleveland	DA	11	22
OSR - Knoxville	DA	11	22
P&G - Ketchum	PRI	13	34
P&G Power - Sinclair	PRI	10	27
Pasquariello - Valente	SEC	6	16
PDA - Colwel	PRI	4	13
PDA - Patton	PRI	8	23
Phillips - Phillips	SEC	2	4
PinnaclX	DRONE	1	2
Powerline - Allan	PRI	12	34
Powerline - Allan	PRI	12	33
Powerline - Corso	WG	10	10
Premium - Frattarola	PRI	4	13
Premium - Ward	PRI	4	13

Contractor	Crew Type	# of Crews	# FTEs
Priority - Aux	SEC	1	2
Priority - Prior	SEC	7	14
Reiley Electric-St James	SEC	1	4
Riggs - Frost	PRI	6	17
Riggs Distler - Maxwell	PRI	2	7
Riggs Distler - Peck	SEC	4	11
Sargent - Dubois	PRI	5	14
SM Electric - Forst	SEC	8	22
Sparks - Brinker	PRI	8	18
Sparks - Gunter	PRI	6	13
Sparks - Hinrichs	PRI	9	21
Sparks - Martin	PRI	5	11
Storm SL - Cole	DA	5	10
Storm SL - Perry	DA	8	16
Storm SL - Rode	DA	9	18
Tempest - Albritton	PRI	12	36
Tempest - Castro	PRI	5	14
Tempest - McLaughlin	WG	9	9
Tempest - TUC - OH	DA	6	12
Tempest - TUC - WV	DA	4	8
Tempest CPhase - Cumpton	PRI	0	2
Tempest CPhase - Rivera	PRI	2	6
Tempest -Fly	PRI	13	39
Tempest -Healey	PRI	5	16
Valiant - Magoon	PRI	10	31
Vision - Benitez	PRI	6	15
Vision - Berg	PRI	5	13
Vision - J Young	PRI	5	13
Vision - Phillips	PRI	6	18
Vision - Slavinskas	PRI	10	26
Vision - T Young	PRI	5	13
Vision - Valle	PRI	6	15
Vision - Webb	PRI	6	16
Vision- French	PRI	6	17
Vision- Santoro	PRI	6	16
WMA - Internal Support	PRI-E	20	

Table 24. A list of the crews and FTE equivalents that were hired to assist with restoration efforts.

8.3 Number of Crews Deployed, By Type, To Each District

Sunday, February 22, 2026

AWC	Line Crews	Trouble Crews	Service Crews	Contractor Line Crews	Contractor Tree Crews	Contractor Service Crews	Damage Appraiser Crews	Wire Down FTEs
M-Boston	0	0	0	0	4	0	16	5
M-East Springfield	8	5	0	6	5	0	17	3
M-Hadley	6	6	0	0	5	0	4	1
M-Hyde Park	10	5	0	27	0	0	0	0
M-Marthas	2	2	0	4	2	0	4	0
M-New Bedford	4	6	0	72	22	0	12	8
M-Pittsfield	6	6	0	6	9	0	3	2
M-Plymouth	10	8	0	97	25	20	58	10
M-Somerville	10	9	0	24	4	0	5	0
M-Southborough	12	12	0	37	15	0	13	6
M-Walpole	14	8	0	49	10	0	6	0
M-Waltham	12	10	0	23	14	0	10	15
M-Westwood	0	0	0	0	0	0	0	0
M-Yarmouth	11	15	0	174	60	0	47	15
Grand Total	105	92	0	519	175	20	195	65

Monday, February 23, 2026

AWC	Line Crews	Trouble Crews	Service Crews	Contractor Line Crews	Contractor Tree Crews	Contractor Service Crews	Damage Appraiser Crews	Wire Down FTEs
M-Boston	0	0	0	0	4	0	16	31
M-East Springfield	2	6	0	0	5	0	17	2
M-Hadley	6	6	0	0	5	0	4	1
M-Hyde Park	8	5	0	0	0	0	0	0
M-Marthas	3	2	0	10	2	0	4	0
M-New Bedford	5	6	0	67	22	11	12	8
M-Pittsfield	5	6	0	0	9	0	3	2
M-Plymouth	14	9	14	342	45	9	58	54
M-Somerville	13	9	0	0	4	0	5	0
M-Southborough	6	12	1	0	15	0	13	6
M-Walpole	13	8	0	0	10	0	6	0
M-Waltham	7	10	0	23	14	0	10	15
M-Westwood	0	0	0	0	0	0	0	0
M-Yarmouth	84	15	0	449	70	40	47	13
Grand Total	166	94	15	891	205	60	195	132

Tuesday, February 24, 2026

AWC	Line Crews	Trouble Crews	Service Crews	Contractor Line Crews	Contractor Tree Crews	Contractor Service Crews	Damage Appraiser Crews	Wire Down FTEs
M-Boston	0	0	0	0	4	0	46	31
M-East Springfield	2	6	0	0	4	0	17	2
M-Hadley	6	6	0	0	6	0	4	1
M-Hyde Park	8	5	0	0	0	0	0	0
M-Marthas	3	2	0	11	2	0	4	0
M-New Bedford	5	6	0	67	56	11	12	8
M-Pittsfield	5	6	0	0	9	0	3	2
M-Plymouth	14	9	19	347	43	39	58	54
M-Somerville	13	9	0	0	4	0	5	0
M-Southborough	6	12	0	0	15	0	40	6
M-Walpole	13	8	0	0	17	0	6	0
M-Waltham	7	10	0	0	2	0	10	15
M-Westwood	0	0	0	0	0	0	0	0
M-Yarmouth	89	15	1	544	146	40	82	28
Grand Total	171	94	20	969	308	90	287	147

Wednesday, February 25, 2026

AWC	Line Crews	Trouble Crews	Service Crews	Contractor Line Crews	Contractor Tree Crews	Contractor Service Crews	Damage Appraiser Crews	Wire Down FTEs
M-Boston	0	0	0	0	4	0	0	0
M-East Springfield	0	6	0	0	0	0	0	0
M-Hadley	0	6	0	0	0	0	0	0
M-Hyde Park	4	5	0	0	0	0	0	0
M-Marthas	3	2	0	11	6	0	7	0
M-New Bedford	5	6	0	67	56	11	15	2
M-Pittsfield	0	6	0	0	0	0	0	0
M-Plymouth	36	9	5	410	74	39	75	67
M-Somerville	1	9	0	0	0	0	0	0
M-Southborough	5	11	0	0	0	0	0	0
M-Walpole	10	8	0	0	0	0	0	0
M-Waltham	2	10	0	0	0	0	0	0
M-Westwood	0	0	0	0	0	0	0	0
M-Yarmouth	204	15	15	644	185	43	189	68
Grand Total	270	93	20	1132	325	93	286	137

Thursday, February 26, 2026

AWC	Line Crews	Trouble Crews	Service Crews	Contractor Line Crews	Contractor Tree Crews	Contractor Service Crews	Damage Appraiser Crews	Wire Down FTEs
M-Boston	0	0	0	0	4	0	0	0
M-East Springfield	0	6	0	0	0	0	0	0
M-Hadley	0	6	0	0	0	0	0	0
M-Hyde Park	3	5	0	0	0	0	0	0
M-Marthas	3	2	0	11	6	0	7	0
M-New Bedford	5	6	0	67	56	11	15	0
M-Pittsfield	0	6	0	0	0	0	0	0
M-Plymouth	36	9	6	387	75	78	75	69
M-Somerville	1	9	0	0	0	0	0	0
M-Southborough	0	11	0	0	0	0	0	0
M-Walpole	6	8	0	0	0	0	0	0
M-Waltham	2	10	0	0	0	0	0	0
M-Westwood	0	0	0	0	0	0	0	0
M-Yarmouth	216	15	15	684	187	73	187	70
Grand Total	272	93	21	1149	328	162	284	139

Friday, February 27, 2026

AWC	Line Crews	Trouble Crews	Service Crews	Contractor Line Crews	Contractor Tree Crews	Contractor Service Crews	Damage Appraiser Crews	Wire Down FTEs
M-Boston	0	0	0	0	4	0	0	0
M-East Springfield	0	6	0	0	0	0	0	0
M-Hadley	0	6	0	0	0	0	0	0
M-Hyde Park	3	5	0	0	0	0	0	0
M-Marthas	3	2	0	11	6	0	7	0
M-New Bedford	5	6	0	36	56	11	17	0
M-Pittsfield	0	6	0	0	0	0	0	0
M-Plymouth	36	9	6	357	75	78	37	44
M-Somerville	1	9	0	0	0	0	0	0
M-Southborough	0	11	0	0	0	0	0	0
M-Walpole	6	8	0	0	0	0	0	0
M-Waltham	2	10	0	0	0	0	0	0
M-Westwood	0	0	0	0	0	0	0	0
M-Yarmouth	215	15	15	683	187	73	124	45
Grand Total	271	93	21	1087	328	162	185	89

Saturday, February 28, 2026

AWC	Line Crews	Trouble Crews	Service Crews	Contractor Line Crews	Contractor Tree Crews	Contractor Service Crews	Damage Appraiser Crews	Wire Down FTEs
M-Boston	0	0	0	0	0	0	0	0
M-East Springfield	0	6	0	0	0	0	0	0
M-Hadley	0	6	0	0	0	0	0	0
M-Hyde Park	1	5	0	0	0	0	0	0
M-Marthas	3	2	0	13	1	0	5	0
M-New Bedford	1	6	0	0	9	0	9	0
M-Pittsfield	0	6	0	0	0	0	0	0
M-Plymouth	26	9	0	37	17	0	7	0
M-Somerville	1	9	0	0	0	0	0	0
M-Southborough	1	11	0	0	0	0	0	0
M-Walpole	6	8	0	0	0	0	0	0
M-Waltham	3	10	0	0	0	0	0	0
M-Westwood	0	0	0	0	0	0	0	0
M-Yarmouth	58	15	0	50	44	0	14	0
Grand Total	100	93	0	100	71	0	35	0

Sunday, March 1, 2026

AWC	Line Crews	Trouble Crews	Service Crews	Contractor Line Crews	Contractor Tree Crews	Contractor Service Crews	Damage Appraiser Crews	Wire Down FTEs
M-Boston	0	0	0	0	0	0	0	0
M-East Springfield	0	6	0	0	0	0	0	0
M-Hadley	0	6	0	0	0	0	0	0
M-Hyde Park	1	5	0	0	0	0	0	0
M-Marthas	3	2	0	13	1	0	5	0
M-New Bedford	1	6	0	0	9	0	7	0
M-Pittsfield	0	6	0	0	0	0	0	0
M-Plymouth	26	9	0	37	17	0	7	0
M-Somerville	1	9	0	0	0	0	0	0
M-Southborough	1	11	0	0	0	0	0	0
M-Walpole	6	8	0	0	0	0	0	0
M-Waltham	3	10	0	0	0	0	0	0
M-Westwood	0	0	0	0	0	0	0	0
M-Yarmouth	58	15	0	50	44	0	11	0
Grand Total	100	93	0	100	71	0	30	0

Table 25. A daily list of the maximum number of crews deployed to each Eversource Area Work Center to assist with power restoration efforts.

9 FOOD AND LODGING

The Food & Lodging Section was activated on Saturday, February 21st at 10:30 a.m. to initiate preparatory actions in advance of the February 2026 Blizzard. By 11:00 a.m., the team began requesting and compiling hotel room availability through the automated outreach process to support anticipated restoration efforts. Over the subsequent eight-day restoration period, the team successfully coordinated lodging across 102 individual hotels, securing a total of 18,416 beds to support nearly 15,000 restoration resources. This effort ensured timely and geographically appropriate accommodations to sustain field operations throughout the event.

In parallel, the Food & Lodging team facilitated the provision of approximately 45,000 meals, including breakfast, boxed lunches, and dinners. Meal services were delivered through a coordinated mix of local caterers, area restaurants, and in-house hotel dining facilities, allowing for flexibility and continuity despite changing and challenging operational conditions.

Beyond standard food and lodging support, the team played a critical role in identifying and securing generators for hotels and food service locations impacted in the Cape region. The deployment of these generators enabled several facilities to resume operations, directly supporting the continued lodging and feeding of restoration personnel in affected areas.

To further support the workforce, a Food & Lodging Hotline was maintained throughout the restoration period. This resource provided workers with real-time assistance for lodging inquiries, meal coordination, and issue resolution, contributing to efficient communication and enhanced field support.

9.1 NUMBER OF BEDS BOOKED

Number of Beds Booked / Assigned by Region					
		Booked		Number of Resources Lodged	
Date	**Region**	**Single**	**Double**	**Single**	**Double**
2/22/2026	Cape/MV- MA	49	47	60	29
	Metro Boston - MA	53	16	52	3
	Metro West - MA	49	17	46	6
	South - MA	38	0	39	20
	West - MA	6	0	3	1
2/22/2026 Total		**195**	**80**	**200**	**59**
2/23/2026	Cape/MV- MA	400	754	315	1,058
	Metro Boston - MA	129	149	75	114
	Metro West - MA	216	306	142	655
	South - MA	237	434	148	659
	West - MA	23	5	2	0
2/23/2026 Total		**1,005**	**1,648**	**682**	**2,486**
2/24/2026	Cape/MV- MA	774	1,481	668	2,398
	Metro Boston - MA	95	74	39	3
	Metro West - MA	84	101	14	50
	South - MA	494	783	354	1,559
	West - MA	17	5	2	0
2/24/2026 Total		**1,464**	**2,444**	**1,077**	**4,010**
2/25/2026	Cape/MV- MA	868	1,649	688	2,668
	Metro Boston - MA	50	31	30	4
	Metro West - MA	102	138	11	40
	South - MA	659	877	395	1,766
	West - MA	2	3	1	0
2/25/2026 Total		**1,681**	**2,698**	**1,125**	**4,478**
2/26/2026	Cape/MV- MA	846	1,704	729	2,996
	Metro Boston - MA	41	30	23	2
	Metro West - MA	94	93	8	1
	South - MA	712	909	379	1,586
	West - MA	2	0	0	0

Number of Beds Booked / Assigned by Region					
		Booked		Number of Resources Lodged	
2/26/2026 Total		**1,695**	**2,736**	**1,139**	**4,585**
2/27/2026	Cape/MV- MA	453	1,109	246	1,164
	Metro Boston - MA	0	0	16	1
	Metro West - MA	114	92	7	5
	South - MA	210	250	83	321
	West - MA	0	0	0	0
2/27/2026 Total		**777**	**1,451**	**352**	**1,491**
2/28/2026	Cape/MV- MA	85	297	62	291
	Metro Boston - MA	0	0	0	0
	Metro West - MA	0	0	0	0
	South - MA	50	110	65	142
	West - MA	0	0	0	0
2/28/2026 Total		**135**	**407**	**127**	**433**
3/1/2026	Cape/MV- MA	40	98	14	151
	Metro Boston - MA	0	0	0	0
	Metro West - MA	0	0	0	0
	South - MA	35	31	12	46
	West - MA	0	0	0	0
3/1/2026 Total		**75**	**129**	**26**	**197**
Grand Total		**7,027**	**11,593**	**4,728**	**17,739**

Table 26. The number of hotel beds book each day and the number used.

9.2 HOTELS USED DURING EMERGENCY RESTORATION

List of Hotels Used							
Cape/MV- MA	**Cape/MV- MA**	**Cape/MV- MA**	**Cape/MV- MA**	**Cape/MV- MA**	**Cape/MV- MA**	**Cape/MV- MA**	**Cape/MV- MA**
Sun 2/22/2026	**Mon 2/23/2026**	**Tue 2/24/2026**	**Wed 2/25/2026**	**Thu 2/26/2026**	**Fri 2/27/2026**	**Sat 2/28/2026**	**Sun 3/1/2026**
4	**16**	**33**	**35**	**34**	**22**	**9**	**3**
Margaritaville Resort Cape Cod - Hyannis MA	Margaritaville Resort Cape Cod - Hyannis MA	Margaritaville Resort Cape Cod - Hyannis MA	Margaritaville Resort Cape Cod - Hyannis MA	Margaritaville Resort Cape Cod - Hyannis MA	Margaritaville Resort Cape Cod - Hyannis MA	Margaritaville Resort Cape Cod - Hyannis MA	Holiday Inn Hyannis - Hyannis MA
Four Points Sheraton - Eastham MA	Four Points Sheraton - Eastham MA	Four Points Sheraton - Eastham MA	Seaport Inn Fairfield - Fairhaven MA	Seaport Inn Fairfield - Fairhaven MA	Courtyard Marriott Marlborough - Marlborough MA	Holiday Inn Hyannis - Hyannis MA	Cape Cod Hotel - Hyannis MA
Holiday Inn Hyannis - Hyannis MA	Double Tree Hilton Hyannis - Hyannis MA	Courtyard Marriott Marlborough - Marlborough MA	Four Points Sheraton - Eastham MA	Four Points Sheraton - Eastham MA	Daniel Webster Inn Sandwich - Sandwich MA	Marriott Hyannis - Hyannis MA	Ocean Edge Resort & Golf Club - Brewster MA
Sea Crest Beach Hotel - North Falmouth MA	Holiday Inn Hyannis - Hyannis MA	Daniel Webster Inn Sandwich - Sandwich MA	Courtyard Marriott Marlborough - Marlborough MA	Courtyard Marriott Marlborough - Marlborough MA	Marriott Hyannis - Hyannis MA	Cape Cod Irish Village at The Emerald - Hyannis MA	
	Cape Cod Irish Village at The Emerald - Hyannis MA	Double Tree Hilton Hyannis - Hyannis MA	Daniel Webster Inn Sandwich - Sandwich MA	Daniel Webster Inn Sandwich - Sandwich MA	Verve Crowne Natick - Natick MA	Cape Cod Hotel - Hyannis MA	
	Hampton Inn & Suites Cape Cod - West Yarmouth MA	Hilton Garden Inn Marlborough - Marlborough MA	Double Tree Hilton Hyannis - Hyannis MA	Double Tree Hilton Hyannis - Hyannis MA	Cape Cod Irish Village at The Emerald - Hyannis MA	Ocean Edge Resort & Golf Club - Brewster MA	
	Residence Inn Foxboro - Foxborough MA	Iris Hotel Cape Cod - Falmouth MA	Hilton Garden Inn Marlborough - Marlborough MA	Hilton Garden Inn Marlborough - Marlborough MA	Double Tree Hilton Hyannis - Hyannis MA	Falmouth Inn - Falmouth MA	
	Hilton Garden Inn Foxboro	Holiday Inn Hyannis - Hyannis MA	Iris Hotel Cape Cod - Falmouth MA	Iris Hotel Cape Cod - Falmouth MA	Four Points Sheraton - Eastham MA	Ambassador Inn & Suites - South	

List of Hotels Used							
Cape/MV- MA	**Cape/MV- MA**	**Cape/MV- MA**	**Cape/MV- MA**	**Cape/MV- MA**	**Cape/MV- MA**	**Cape/MV- MA**	**Cape/MV- MA**
Sun 2/22/2026	**Mon 2/23/2026**	**Tue 2/24/2026**	**Wed 2/25/2026**	**Thu 2/26/2026**	**Fri 2/27/2026**	**Sat 2/28/2026**	**Sun 3/1/2026**
4	**16**	**33**	**35**	**34**	**22**	**9**	**3**
	Patriot Plc - Foxboro MA					Yarmouth MA	
	Sonesta Select Boston Foxb/Mansfield - Foxboro MA	Seaport Inn Fairfield - Fairhaven MA	Holiday Inn Hyannis - Hyannis MA	Holiday Inn Hyannis - Hyannis MA	Hampton Inn Natick - Natick MA	Comfort Inn - Hyannis MA	
	Sea Crest Beach Hotel - North Falmouth MA	Marriott Hyannis - Hyannis MA	Hampton Inn Auburn - Auburn MA	Marriott Hyannis - Hyannis MA	Iris Hotel Cape Cod - Falmouth MA		
	Ocean Edge Resort & Golf Club - Brewster MA	Courtyard Marriott Westborough - Westborough MA	Marriott Hyannis - Hyannis MA	Courtyard Marriott Westborough - Westborough MA	Holiday Inn Hyannis - Hyannis MA		
	Admiralty Inn Falmouth - East Falmouth MA	Hyatt Place Mystic - Mystic, CT	Courtyard Marriott Westborough - Westborough MA	Hyatt Place Mystic - Mystic, CT	Hyannis Plaza Hotel - Hyannis MA		
	All Seasons Resort - South Yarmouth MA	Marriot Newton - Newton MA	Hyatt Place Mystic - Mystic, CT	Marriot Newton - Newton MA	All Seasons Resort - South Yarmouth MA		
	Hyannis Plaza Hotel - Hyannis MA	Cape Cod Irish Village at The Emerald - Hyannis MA	Marriot Newton - Newton MA	Cape Cod Irish Village at The Emerald - Hyannis MA	Ocean Edge Resort & Golf Club - Brewster MA		
	Ambassador Inn & Suites - South Yarmouth MA	Hampton Inn & Suites Cape Cod - West Yarmouth MA	Cape Cod Irish Village at The Emerald - Hyannis MA	Holiday Inn enVision - Mansfield MA	Admiralty Inn Falmouth - East Falmouth MA		
	Hampton Inn & Suites FoxboroMansfld - Foxboro MA	Sonesta Select Boston Foxb/Mansfield - Foxboro MA	Holiday Inn enVision - Mansfield MA	Fairfield Inn & Suites - Walpole MA	Ambassador Inn & Suites - South Yarmouth MA		
		Holiday Inn Exp & Suites Warwick-Pro - Warwick CT	Fairfield Inn & Suites - Walpole MA	Hampton Inn & Suites Cape Cod - West Yarmouth MA	Cape Cod Hotel - Hyannis MA		

List of Hotels Used							
Cape/MV- MA	**Cape/MV- MA**	**Cape/MV- MA**	**Cape/MV- MA**	**Cape/MV- MA**	**Cape/MV- MA**	**Cape/MV- MA**	**Cape/MV- MA**
Sun 2/22/2026	**Mon 2/23/2026**	**Tue 2/24/2026**	**Wed 2/25/2026**	**Thu 2/26/2026**	**Fri 2/27/2026**	**Sat 2/28/2026**	**Sun 3/1/2026**
4	**16**	**33**	**35**	**34**	**22**	**9**	**3**
		Sea Crest Beach Hotel - North Falmouth MA	Sonesta Select Boston Foxb/Mansfield - Foxboro MA	Cape Cod Hotel - Hyannis MA	Falmouth Inn - Falmouth MA		
		Ocean Edge Resort & Golf Club - Brewster MA	Holiday Inn Exp & Suites Warwick-Pro - Warwick CT	Sonesta Select Boston Foxb/Mansfield - Foxboro MA	Mariner Hotel - West Yarmouth MA		
		Admiralty Inn Falmouth - East Falmouth MA	Sea Crest Beach Hotel - North Falmouth MA	Sea Crest Beach Hotel - North Falmouth MA	Fairfield Inn & Suites - Walpole MA		
		All Seasons Resort - South Yarmouth MA	Ocean Edge Resort & Golf Club - Brewster MA	Ocean Edge Resort & Golf Club - Brewster MA	Pelham House Resort - Yarmouth MA		
		Hyannis Plaza Hotel - Hyannis MA	Falmouth Inn - Falmouth MA	Falmouth Inn - Falmouth MA	Hyannis Harbor Hotel - Hyannis MA		
		Ambassador Inn & Suites - South Yarmouth MA	Admiralty Inn Falmouth - East Falmouth MA	Admiralty Inn Falmouth - East Falmouth MA			
		Mariner Hotel - West Yarmouth MA	All Seasons Resort - South Yarmouth MA	All Seasons Resort - South Yarmouth MA			
		Embassy Suites - Marlborough MA	Hyannis Plaza Hotel - Hyannis MA	Hyannis Plaza Hotel - Hyannis MA			
		Hyatt Place - Marlborough MA	Ambassador Inn & Suites - South Yarmouth MA	Ambassador Inn & Suites - South Yarmouth MA			
		Comfort Inn - Hyannis MA	Mariner Hotel - West Yarmouth MA	Mariner Hotel - West Yarmouth MA			
		Hampton Inn - Sturbridge MA	Pelham House Resort - Yarmouth MA	Pelham House Resort - Yarmouth MA			
		Hilton Dedham - Dedham MA	Embassy Suites - Marlborough MA	Embassy Suites - Marlborough MA			
		Hampton Inn BostonMarlborough -	Hyatt Place - Marlborough MA	Hyatt Place - Marlborough MA			

List of Hotels Used							
Cape/MV- MA	**Cape/MV- MA**	**Cape/MV- MA**	**Cape/MV- MA**	**Cape/MV- MA**	**Cape/MV- MA**	**Cape/MV- MA**	**Cape/MV- MA**
Sun 2/22/2026	**Mon 2/23/2026**	**Tue 2/24/2026**	**Wed 2/25/2026**	**Thu 2/26/2026**	**Fri 2/27/2026**	**Sat 2/28/2026**	**Sun 3/1/2026**
4	**16**	**33**	**35**	**34**	**22**	**9**	**3**
		Marlborough MA					
		Hampton Inn & Suites FoxboroMansfld - Foxboro MA	Verve Crowne Natick - Natick MA	Verve Crowne Natick - Natick MA			
		Hampton Inn Auburn - Auburn MA	Comfort Inn - Hyannis MA	Comfort Inn - Hyannis MA			
		Verve Crowne Natick - Natick MA	Chatham Bars Inn - Chatham MA	Chatham Bars Inn - Chatham MA			
			Hampton Inn - Sturbridge MA	Hampton Inn BostonMarlborough - Marlborough MA			
			Hampton Inn BostonMarlborough - Marlborough MA				

South - MA	South - MA	South - MA	South - MA	South - MA	South - MA	South - MA	South - MA
Sun 2/22/2026	**Mon 2/23/2026**	**Tue 2/24/2026**	**Wed 2/25/2026**	**Thu 2/26/2026**	**Fri 2/27/2026**	**Sat 2/28/2026**	**Sun 3/1/2026**
4	**21**	**32**	**35**	**34**	**19**	**7**	**2**
Hampton Inn Westport - Westport MA	Courtyard Marriott Raynham - Raynham MA	Courtyard Marriott Raynham - Raynham MA	Courtyard Marriott Raynham - Raynham MA	Courtyard Marriott Raynham - Raynham MA	Best Western Braintree Inn - Braintree MA	Pilgrim Sands - Plymouth MA	Hampton Inn Plymouth - Plymouth MA
Fairfield Inn New Bedford - New Bedford MA	Hampton Inn Fairhaven - Fairhaven MA	Hampton Inn Fairhaven - Fairhaven MA	Hampton Inn Fairhaven - Fairhaven MA	Hampton Inn Fairhaven - Fairhaven MA	Holiday Inn used to be Comfort Inn - Plymouth MA	John Carver Inn Plymouth - Plymouth MA	Fairfield Inn - Plymouth MA
Hotel 1620 Plymouth - Plymouth MA	Renaissance Boston Patriot Place Htl - Foxboro MA	Residence Inn New Bedford Dartmouth - Dartmouth MA	Comfort Inn & Suites - Sturbridge MA	Residence Inn New Bedford Dartmouth - Dartmouth MA	John Carver Inn Plymouth - Plymouth MA	Hampton Inn Plymouth - Plymouth MA	
Fairfield Inn - Plymouth MA	Hampton Inn Westport - Westport MA	Homewood Suites by Hilton Canton - Canton MA	Residence Inn New Bedford Dartmouth - Dartmouth MA	Renaissance Boston Patriot Place Htl - Foxboro MA	Fairfield Inn New Bedford - New Bedford MA	Hotel 1620 Plymouth - Plymouth MA	
	Fairfield Inn New Bedford - New Bedford MA	Renaissance Boston Patriot Place Htl - Foxboro MA	Renaissance Boston Patriot Place Htl - Foxboro MA	Hampton Inn Westport - Westport MA	Fairfield Inn Middleboro - Middleboro MA	Holiday Inn used to be Comfort Inn - Plymouth MA	
	Hampton Inn Plymouth - Plymouth MA	Hampton Inn Westport - Westport MA	Hampton Inn Westport - Westport MA	Fairfield Inn New Bedford - New Bedford MA	Hampton Inn Fairhaven - Fairhaven MA	Fairfield Inn - Plymouth MA	
	Hotel 1620 Plymouth - Plymouth MA	Fairfield Inn New Bedford - New Bedford MA	Fairfield Inn New Bedford - New Bedford MA	Hilton Garden Inn Waltham - Waltham MA	Hampton Inn Plymouth - Plymouth MA	Hampton Inn - Buzzards Bay MA	
	Fairfield Inn Middleboro - Middleboro MA	Quality Inn Seekonk-Providence	Hilton Garden Inn Waltham - Waltham MA	Quality Inn Seekonk-Providence	Holiday Inn Express Middleboro - Middleboro MA		
	Holiday Inn used to be Comfort Inn - Plymouth MA	John Carver Inn Plymouth - Plymouth MA	Quality Inn Seekonk-Providence	John Carver Inn Plymouth - Plymouth MA	Hampton Inn - Buzzards Bay MA		

South - MA	South - MA	South - MA	South - MA	South - MA	South - MA	South - MA	South - MA
Sun 2/22/2026	Mon 2/23/2026	Tue 2/24/2026	Wed 2/25/2026	Thu 2/26/2026	Fri 2/27/2026	Sat 2/28/2026	Sun 3/1/2026
4	21	32	35	34	19	7	2
	Holiday Inn Express Middleboro - Middleboro MA	Hampton Inn Plymouth - Plymouth MA	John Carver Inn Plymouth - Plymouth MA	Hampton Inn Plymouth - Plymouth MA	Towne Place Suites - Wareham MA		
	Fairfield Inn - Plymouth MA	Hotel 1620 Plymouth - Plymouth MA	Hampton Inn Plymouth - Plymouth MA	Hotel 1620 Plymouth - Plymouth MA	Fairfield Inn - Plymouth MA		
	Hampton Inn Raynham - Taunton MA	Fairfield Inn Middleboro - Middleboro MA	Hotel 1620 Plymouth - Plymouth MA	Fairfield Inn Middleboro - Middleboro MA	TownePlace Suites - Westport MA		
	New Bedford Harbor Hotel - New Bedford MA	Holiday Inn used to be Comfort Inn - Plymouth MA	Fairfield Inn Middleboro - Middleboro MA	Holiday Inn Express Middleboro - Middleboro MA	Fairfield Inn Mansfield - Mansfield MA		
	Holiday Inn Express Fall River - Fall River MA	Fairfield Inn - Plymouth MA	Holiday Inn Express Middleboro - Middleboro MA	Fairfield Inn - Plymouth MA	Renaissance Providence Downtown - Providence RI		
	Fairfield Inn Mansfield - Mansfield MA	Residence Inn Franklin - Franklin MA	Fairfield Inn - Plymouth MA	Garner Hotel Brockton - Brockton MA	Marriott Quincy - Quincy MA		
	TownePlace Suites - Westport MA	New Bedford Harbor Hotel - New Bedford MA	Garner Hotel Brockton - Brockton MA	Best Western Rockland - Rockland MA	New Bedford Harbor Hotel - New Bedford MA		
	Hampton Inn Seekonk Providence - Seekonk MA	Fairfield by Marriott Boston Marlborough	Howard Johnson Quincy - Quincy MA	Howard Johnson Quincy - Quincy MA	Best Western Rockland - Rockland MA		
	Ramada by Wyndham - Seekonk MA	Holiday Inn Express Fall River - Fall River MA	Best Western Adams Inn - Quincy MA	Best Western Adams Inn - Quincy MA	Ramada by Wyndham - Seekonk MA		
	Riverview Inn and Suites - Somerset MA	Fairfield Inn Mansfield - Mansfield MA	Residence Inn Franklin - Franklin MA	Residence Inn Franklin - Franklin MA	Pilgrim Sands - Plymouth MA		

South - MA	South - MA	South - MA	South - MA	South - MA	South - MA	South - MA	South - MA
Sun 2/22/2026	**Mon 2/23/2026**	**Tue 2/24/2026**	**Wed 2/25/2026**	**Thu 2/26/2026**	**Fri 2/27/2026**	**Sat 2/28/2026**	**Sun 3/1/2026**
4	**21**	**32**	**35**	**34**	**19**	**7**	**2**
	Hampton Inn - Buzzards Bay MA	TownePlace Suites - Westport MA	New Bedford Harbor Hotel - New Bedford MA	Fairfield by Marriott Boston Marlborough			
	Hampton Inn Franklin - Franklin MA	Whaler Inn and Suites	Fairfield by Marriott Boston Marlborough	Marriott Quincy - Quincy MA			
		Renaissance Providence Downtown - Providence RI	Fairfield Inn Mansfield - Mansfield MA	Holiday Inn Express Fall River - Fall River MA			
		Baymont by Wyndham - North Dartmouth MA	TownePlace Suites - Westport MA	Fairfield Inn Mansfield - Mansfield MA			
		Hampton Inn Seekonk Providence - Seekonk MA	Whaler Inn and Suites	TownePlace Suites - Westport MA			
		Sturbridge Hotel & Conference Cntr - Sturbridge MA	Renaissance Providence Downtown - Providence RI	Renaissance Providence Downtown - Providence RI			
		Ramada by Wyndham - Seekonk MA	Super 8 Brockton - Brockton MA	Super 8 Brockton - Brockton MA			
		Riverview Inn and Suites - Somerset MA	Hampton Inn Seekonk Providence - Seekonk MA	Hampton Inn Seekonk Providence - Seekonk MA			
		Hampton Inn - Buzzards Bay MA	Sturbridge Hotel & Conference Cntr - Sturbridge MA	Ramada by Wyndham - Seekonk MA			
		Fairfield Inn Somerset - Somerset MA	Ramada by Wyndham - Seekonk MA	Comfort Inn Rockland - Rockland MA			
		Best Western Braintree Inn - Braintree MA	Comfort Inn Rockland - Rockland MA	Riverview Inn and Suites - Somerset MA			
		Hampton Inn Franklin - Franklin MA	Riverview Inn and Suites - Somerset MA	Hampton Inn - Buzzards Bay MA			
		Comfort Inn & Suites - Sturbridge MA	Hampton Inn - Buzzards Bay MA	Fairfield Inn Somerset - Somerset MA			
			Fairfield Inn Somerset - Somerset MA	Best Western Braintree Inn - Braintree MA			

South - MA	South - MA	South - MA	South - MA	South - MA	South - MA	South - MA	South - MA
Sun 2/22/2026	**Mon 2/23/2026**	**Tue 2/24/2026**	**Wed 2/25/2026**	**Thu 2/26/2026**	**Fri 2/27/2026**	**Sat 2/28/2026**	**Sun 3/1/2026**
4	**21**	**32**	**35**	**34**	**19**	**7**	**2**
			Best Western Braintree Inn - Braintree MA	Hampton Inn Franklin - Franklin MA			
			Hampton Inn Franklin - Franklin MA				

Metro West - MA	Metro West - MA	Metro West - MA	Metro West - MA	Metro West - MA	Metro West - MA	Metro West - MA	Metro West - MA
Sun 2/22/2026	**Mon 2/23/2026**	**Tue 2/24/2026**	**Wed 2/25/2026**	**Thu 2/26/2026**	**Fri 2/27/2026**	**Sat 2/28/2026**	**Sun 3/1/2026**
3	**9**	**6**	**4**	**3**	**0**	**0**	**0**
Sheraton Framingham - Framingham MA	Hilton Garden Inn Waltham - Waltham MA	Fairfield Inn & Suites - Walpole MA	Hilton Dedham - Dedham MA	Hilton Dedham - Dedham MA	Sheraton Framingham - Framingham MA		
Holiday Inn Express Waltham - Waltham MA	Marriot Newton - Newton MA	Hilton Garden Inn Waltham - Waltham MA	Sheraton Framingham - Framingham MA	Sheraton Framingham - Framingham MA	Four Points Sheraton Norwood - Norwood MA		
Four Points Sheraton Norwood - Norwood MA	Sheraton Framingham - Framingham MA	Sheraton Framingham - Framingham MA	Four Points Sheraton Norwood - Norwood MA	Four Points Sheraton Norwood - Norwood MA	Hilton Dedham - Dedham MA		
	Hampton Inn Natick - Natick MA	Hampton Inn Natick - Natick MA	Hilton Garden Inn Burlington - Burlington MA				
	Verve Crowne Natick - Natick MA	Four Points Sheraton Norwood - Norwood MA					
	Holiday Inn Express Waltham - Waltham MA	Holiday Inn enVision - Mansfield MA					
	Four Points Sheraton Norwood - Norwood MA						
	Courtyard Marriott Marlborough - Marlborough MA						
	Courtyard Marriott Westborough - Westborough MA						

Metro Boston - MA	Metro Boston - MA	Metro Boston - MA	Metro Boston - MA	Metro Boston - MA	Metro Boston - MA	Metro Boston - MA	Metro Boston - MA
Sun 2/22/2026	**Mon 2/23/2026**	**Tue 2/24/2026**	**Wed 2/25/2026**	**Thu 2/26/2026**	**Fri 2/27/2026**	**Sat 2/28/2026**	**Sun 3/1/2026**
5	**8**	**5**	**4**	**5**	**0**	**0**	**0**
Holiday Inn Boston/Cambridge Area (Bunker Hill)	Holiday Inn Bunker Hill - Somerville MA	Holiday Inn Bunker Hill - Somerville MA	Holiday Inn Bunker Hill - Somerville MA	Holiday Inn Bunker Hill - Somerville MA			
LaQuinta Inn Somerville - Somerville MA	LaQuinta Inn Somerville - Somerville MA	AC Hotel Boston North - Medford MA	Courtyard Marriott South Boston - South Boston MA	Courtyard Marriott South Boston - South Boston MA			
Courtyard Marriott South Boston - South Boston MA	AC Hotel Boston North - Medford MA	Courtyard Marriott South Boston - South Boston MA	Courtyard Marriott Westwood - Westwood MA	Home 2 Suites - Boston MA			
Courtyard Marriott Westwood - Westwood MA	Best Western Braintree Inn - Braintree MA	Courtyard Marriott Westwood - Westwood MA	Holiday Inn Dedham - Dedham MA	Courtyard Marriott Westwood - Westwood MA			
Holiday Inn Dedham - Dedham MA	Courtyard Marriott South Boston - South Boston MA	Holiday Inn Dedham - Dedham MA		Holiday Inn Dedham - Dedham MA			
	Courtyard Marriott Westwood - Westwood MA						
	Hilton Dedham - Dedham MA						
	Holiday Inn Dedham - Dedham MA						

West - MA	West - MA	West - MA	West - MA	West - MA	West - MA	West - MA	West - MA
Sun 2/22/26	**Mon 2/23/26**	**Tue 2/24/26**	**Wed 2/25/26**	**Thu 2/26/26**	**Fri 2/27/26**	**Sat 2/28/26**	**Sun 3/1/26**
3	**3**	**2**	**1**	**1**	**0**	**0**	**0**
Sheraton Monarch Place - Springfield MA	Sheraton Monarch Place - Springfield MA	Sheraton Monarch Place - Springfield MA	Sheraton Monarch Place - Springfield MA	Sheraton Monarch Place - Springfield MA			
Hampton Inn Hadley - Hadley MA	Hampton Inn Hadley - Hadley MA	Hampton Inn Hadley - Hadley MA					
Holiday Inn & Suites Pittsfield-Berkshires MA	Holiday Inn & Suites Pittsfield - Berkshires MA						

Table 27. A list of all hotels used to lodge workers by day and by region.

10 DRONES, HELICOPTERS, SPECIALIZED EQUIPMENT

10.1 DRONE USAGE

Drones played an important role in circuit patrols during the event. A total of 37 circuits were patrolled using drones, with 34 circuits focused on distribution and three circuits dedicated to transmission. The drones collectively covered 129 miles, of which 88 miles were patrolled by Eversource personnel and 41 miles by contractors. The drone patrols produced extensive visual documentation, resulting in over 8,000 photographs. Drone patrols were crucial to Eversource's successful restoration during the February 2026 Blizzard. Miles of backbone circuits, inaccessible to vehicles due to the depth of snow, were able to be patrolled by drones rapidly, documenting damage to the system in near real time. Photographs and damage assessments obtained via drone patrols allowed the Company to focus restoration resources on areas where timely and effective repairs led to larger customer restorations. It was due to the effective use of drones that Beth Israel Plymouth was able to be restored at least 24 hours sooner than had damage assessment not been done by drones. Additionally, 17 damage reports were generated based on the footage captured during these drone operations.

10.2 Helicopter Usage

Helicopters were used beginning Tuesday, February 24th. The first flight completed patrols of transmission lines that were out of service and had storm-related outage events. Two aircraft patrolled the entire transmission and mainline distribution systems in southeastern Massachusetts on Thursday, February 26th. Two aircraft were also utilized on Friday, February 27th to patrol the entire transmission system on Cape Cod and the mainline distribution system in southeastern Massachusetts. Flights were heavily restricted due to limited refueling options as many airports were closed and would not open the minimal space needed to refuel a helicopter. Airports do not deem these flights as a priority in the same way they do MedFlight or State Police operations.

10.3 Specialized Equipment

Due to the magnitude and volume of snow, gaining access to trouble locations was difficult if not impossible at times. Eversource utilized different equipment to help plow or trek our way through to damaged equipment.



11 COMMUNICATIONS

11.1 LIAISON PROCESS

11.1.1 Pre-Event Liaison Communication

On Friday, February 20th, the Liaison Officers distributed a communication to all members of the liaison organization. This message informed them that Eversource was monitoring a significant weather event expected to impact the Eversource service territory on Sunday, February 22nd through Monday, February 23rd. In addition, the communication announced that a schedule was being assembled in preparation for the event.

The Liaison Officers drafted a multi-day liaison schedule for all five EOCs, with added liaisons scheduled in the New Bedford and Yarmouth EOCs as well as a dedicated liaison for the Barnstable Multi Agency Coordination Center. On Saturday, February 21st, the liaison schedule was finalized and shared with the liaison organization. Additionally, a list of potential embedded liaisons was developed.

11.1.1 Service Restoration Stage

On Sunday, February 22nd, "Just in Time Training" on iUtilitix was held for liaisons, and the first shift began at 8:00 p.m. On Monday, February 23rd, an embedded liaison schedule was finalized, and the assigned liaisons were notified of their individual town assignment. Embedded liaisons were deployed to their respective town's designated EOC starting on Tuesday February 24th and remained deployed until restoration was substantially complete in each town.

11.1.2 Post-Event Stage

All liaisons who worked on the event were asked to complete a post-event survey to gather information and feedback regarding their storm experience. Recommendations from this survey have informed the Eversource IMT of improvements to the liaison process for future ERP events.

11.2 COMMUNICATIONS WITH MUNICIPALITIES


11.2.1 Pre-Event Stage

On Friday, February 20th, public safety and municipal officials were sent a Community Update email informing them that Eversource was monitoring the upcoming weather event. On Saturday evening (February 21st), municipal officials were informed of the Company's plan to activate at a Type 4 ERP and open all five EOCs starting on Sunday, February 22nd. Officials were encouraged to use the Municipal Hub to submit FPS tickets. At 8:00 a.m. Sunday, February 22nd, the liaison schedule for Sunday night through Monday day shifts was shared. Shortly thereafter, a follow-up email was sent informing municipalities that Eversource would declare a Type 3 ERP (upgraded from Type 4) starting at 6:00 p.m. Sunday. Officials were also invited to attend a "Just in Time Training" for the Municipal Hub to be held at 3:00 p.m. on Sunday, February 22nd.

11.2.2 Service Restoration Stage

Throughout the event, Eversource Community Liaisons communicated with their assigned town's pre-designated single point of contact to help coordinate community priorities. All community priorities were elevated from the Community Liaison to their Unit Leader who, in turn, brought them to the attention of the EOC Director and/or the Public Safety Section. Liaison Officers also held regularly scheduled calls with the Community Liaisons and Unit Leaders for situational updates, for the Liaison Officers to learn of any community issues or concerns (including the overall status and the top priority requests of each community), and for

Community Liaisons to request additional assistance. In addition, given the size and impact of the event, the Barnstable County Multi-agency Coordination Center ("MACC") opened in Barnstable. Eversource provided the MACC with a dedicated community liaison who helped to field any county priorities. Governor Healey stopped by the MACC during her tour of Cape Cod post impact and was able to talk directly with our Electric Operations President about Eversource's response and plan. Finally, our Eversource Operations President remained on the Cape throughout the week providing press briefings and face to face meetings with any municipal official who wanted to meet and discuss Eversource's restoration. This was very appreciated by the communities.








The Liaison Officers coordinated with the Incident Commander, the Public Safety Section Chief, and the Operations Section Chief to incorporate any outstanding community priorities or concerns into the restoration and crew deployment plans. To ensure municipalities were fully informed as to the status of Eversource's response efforts, the Community Liaisons accessed and gathered information on job specific ETRs, crew counts, public safety events, and critical facilities and Life-Support Customers impacted by the event.

Additionally, the Eversource Municipal Hub provided municipal officials with the ability to access community-specific information regarding outage numbers, critical facilities, Life Support Customers, and public safety events. The Municipal Hub provided a dynamic outage map that enabled municipal officials to view near real-time status updates about restoration activities in their communities. Notably, approximately 80 new requests for access to the Municipal Hub were logged and in a post-storm recap, the Company determined that 80% of all FPS calls were entered through the Municipal Hub, the highest municipal usage of the system to date.

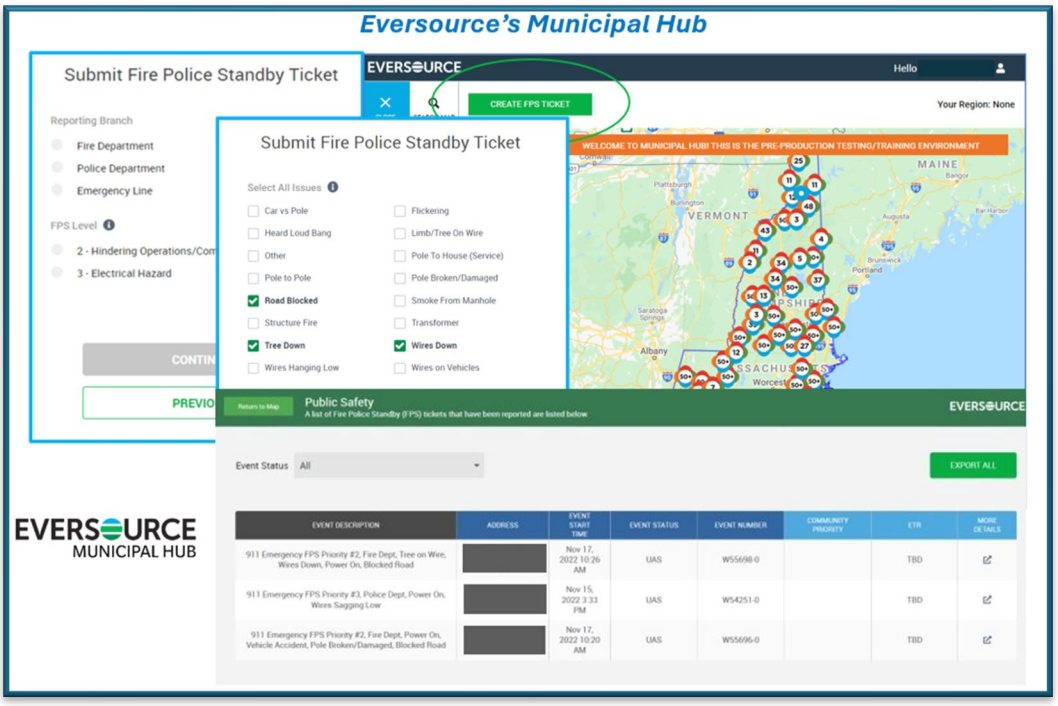

Lastly, the Eversource Community Update mailbox provided daily situational information to all municipal officials regarding Eversource's emergency preparedness activities, overall system damage, global and town-level ETRs, and restoration activities. A total of 14 individual communications were sent through the Community Update email to municipal officials, through the Company's return to Normal Operations on Monday, March 2nd.

Number and Locations of Community Liaisons

Starting on Sunday, February 22nd at 8:00 p.m., and for all subsequent night shifts (through Thursday night, February 26th), there were two overnight unit leaders covering the five EOCs. The Monday (February 23rd) and Tuesday (February 24th) daytime shifts totals are in the chart below:

EOC	# of Community Liaison Unit Leaders	# of Community Liaisons
Boston	2	6
New Bedford	3	6
Southboro	2	3
Springfield	2	6
Yarmouth	4	4

Table 28. The number of Liaison Unit Leaders and Community Liaisons assigned to report to each Eversource EOC.

In addition to liaisons that were working out of Eversource EOCs, the Community Liaison organization deployed an embedded Community Liaison to the following municipalities beginning on Tuesday, February 24th and through the time when restoration in the municipality was substantially complete.

Eversource Community Liaisons were embedded in the following municipalities:

- Carver
- Duxbury
- Kingston
- Marion
- Marshfield
- Plymouth
- Rochester
- Wareham
- Dartmouth
- New Bedford
- Mattapoisett
- Barnstable
- Bourne
- Brewster
- Chatham
- Dennis
- Eastham
- Falmouth
- Harwich
- Mashpee
- Provincetown
- Orleans
- Sandwich
- Truro
- Wellfleet
- Yarmouth
- Dedicated Liaison for Martha's Vineyard (Aquinnah, Chilmark, Edgartown, Oak Bluffs, Tisbury, West Tisbury)

11.2.3 Post-Event Stage

Following the storm, Eversource Community Relations received public accolades[11] from multiple towns across the Southshore and Cape and Islands[12] regarding both Eversource's restoration, public safety coordination and overall liaison communication efforts.

In addition, the Community Relations organization sent all communities, impacted by the storm, a post storm survey to gather feedback on Eversource's response. Members of the Community Relations organization met with any municipal official that requested a follow-up after-action meeting.

11.3 LIFE-SAFETY CUSTOMER COMMUNICATIONS

Leading up to the storm, Eversource provided notifications to all customers via their preferred contact method (SMS, phone, or email). The first notification calls occurred on Saturday, February 21, 2026, to 2,246 confirmed medical customers, reminding customers to plan for the potential for outages due to a forecasted nor'easter. Follow-up messaging was conducted on February 22, 2026. In addition, during and after the impact of the storm occurred, in circumstances where the Community Liaison identified a Life Support Customer experiencing an outage, wellness calls were made to the affected Life Support Customer and local municipal public safety officials were notified to provide well-being checks if the Community Liaison could not reach the customer by telephone.

[11] https://x.com/eversourcema/status/2027585340135870554?s=46
[12] Facebook

11.4 ALL CUSTOMER COMMUNICATIONS

11.4.1 Pre-Event Stage

Notifications were sent to all customers in anticipation of the storm, based on the customers' preferred notification preference. One notification was sent via text at 1:35 p.m. on Saturday, February 21st to 550,352 customers with a 92 percent success rate. A voice message was delivered on Saturday, February 21st at 2:15 p.m. to 210,321 customers with a 79 percent success rate. Finally, an email notification was sent to 302,538 customers on Saturday, February 21st at 3:15 p.m. with a 99 percent success rate.

A second round of pre-storm notifications was sent to all customers on Sunday, February 22nd via the customer's preferred contact method. The first notification was sent via SMS at 1:30 p.m. to 550,352 customers with a 92 percent success rate. The next was a voice message to 210,321 customers with a 79 percent success rate. The final pre-storm notification was sent via email at 2:50 p.m. to 302,538 customers with a 99 percent success rate.

11.4.2 In-Event and Service Restoration Stage

During the storm, Eversource maintained a cadence of three messages per day to all customers without power to keep them informed about the ongoing restoration efforts. These were sent each day leading up to Eversource being substantially complete on Friday, February 27th to let customers know the status of the restoration efforts and educate them regarding the process. Customers who remained without power after February 27th received proactive alerts specific to their outages, including event-level estimated times of restoration.

The table below shows when notifications were sent, the method they were sent based on the customer's preference, the number of each notification type sent, and the percentage of successfully and unsuccessfully delivered notifications between February 23rd and 27th.

Date	Time Sent	Channel	Campaign Type	Total Sent	% Successfully Delivered	% Unsuccessful
Monday, February 23, 2026						
2/23/2026	10:00 AM	SMS	Still Out Morning 1	76,450	94%	6%
2/23/2026	10:20 AM	Voice	Still Out Morning 1	34,679	74%	26%
2/23/2026	10:40 AM	Email	Still Out Morning 1	44,368	99%	1%
2/23/2026	2:45 PM	SMS	Still Out Afternoon 1 (Non-Yarmouth)	43,475	91%	9%
2/23/2026	2:55 PM	Email	Still Out Afternoon 1 (Non-Yarmouth)	23,767	99%	1%
2/23/2026	3:00 PM	Voice	Still Out Afternoon 1 (Non-Yarmouth)	15,537	78%	22%
2/23/2026	3:15 PM	SMS	Still Out Afternoon 2 (Yarmouth)	66,864	97%	3%
2/23/2026	3:20 PM	Email	Still Out Afternoon 2 (Yarmouth)	40,859	99%	1%
2/23/2026	3:35 PM	Voice	Still Out Afternoon 2 (Yarmouth)	34,710	68%	32%
2/23/2026	7:59pm	Email	Still Out Evening 1 (Non-Yarmouth)	23,040	98%	2%
2/23/2026	7:59pm	Voice	Still Out Evening 1 (Non-Yarmouth)	15,276	80%	20%
2/23/2026	8:29pm	SMS	Still Out Evening 1 (Non-Yarmouth)	43,891	90%	10%
2/23/2026	8:16pm	Voice	Still Out Evening 2 (Yarmouth)	34,624	87%	13%
2/23/2026	8:23pm	Email	Still Out Evening 2 (Yarmouth)	40,387	99%	1%
2/23/2026	8:31pm	SMS	Still Out Evening 2 (Yarmouth)	69,650	97%	3%
Tuesday, February 24, 2026						
2/24/2026	10:33am	Email	Still Out Morning 1 (Non-Yarmouth)	21,395	99%	1%
2/24/2026	11:12am	Voice	Still Out Morning 1 (Non-Yarmouth)	13,985	76%	24%
2/24/2026	11:13am	SMS	Still Out Morning 1 (Non-Yarmouth)	39,302	90%	10%
2/24/2026	10:45am	SMS	Still Out Morning 2 (Yarmouth)	67,361	90%	10%

Date	Time Sent	Channel	Campaign Type	Total Sent	% Successfully Delivered	% Unsuccessful
2/24/2026	11:21am	Email	Still Out Morning 2 (Yarmouth)	41,036	99%	1%
2/24/2026	11:22am	Voice	Still Out Morning 2 (Yarmouth)	35,358	68%	32%
2/24/2026	2:04pm	Email	Still Out Afternoon 2	59,952	97%	3%
2/24/2026	2:07pm	SMS	Still Out Afternoon 2	102,490	96%	4%
2/24/2026	2:13pm	Voice	Still Out Afternoon 2	47,451	70%	30%
2/24/2026	5:12pm	Voice	Still Out Evening 1	44558	71%	29%
2/24/2026	5:42pm	Email	Still Out Evening 1	56566	96%	4%
2/24/2026	5:42pm	SMS	Still Out Evening 1	96573	94%	6%
Wednesday, February 25, 2026						
2/25/2026	9:26AM	Voice	Still Out Morning	35002	73%	27%
2/25/2026	9:33AM	Email	Still Out Morning	44996	96%	4%
2/25/2026	9:59AM	SMS	Still Out Morning	76749	94%	6%
2/25/2026	3:25 PM	Voice	Still Out Afternoon	31554	68%	32%
2/25/2026	3:38pm	SMS	Still Out Afternoon	70165	94%	6%
2/25/2026	3:43pm	Email	Still Out Afternoon	41064	99%	1%
2/25/2026	3:47pm	Voice	ETR Update	2319	70%	30%
2/25/2026	4:07pm	SMS	ETR Update	5222	92%	8%
2/25/2026	4:27pm	Email	ETR Update	2908	98%	2%
2/25/2026	6:31pm	SMS	Still Out Evening	60663	95%	5%
2/25/2026	6:31pm	Voice	Still Out Evening	27354	74%	26%
2/25/2026	7:47pm	Email	Still Out Evening	35754	99%	1%
Thursday, February 26, 2026						
2/26/2026	9:45 AM	SMS	Still Out Morning	36144	95%	5%
2/26/2026	9:48 AM	Email	Still Out Morning	21531	99%	1%
2/26/2026	10:01 AM	Voice	Still Out Morning	16711	79%	21%
2/26/2026	2:09 PM	Email	Still Out Afternoon	16665	99%	1%
2/26/2026	2:12 PM	SMS	Still Out Afternoon	28001	95%	5%
2/26/2026	2:20 PM	Voice	Still Out Afternoon	12957	76%	24%
2/26/2026	6:01 PM	Email	Still Out Evening	8585	99%	1%
2/26/2026	6:09 PM	SMS	Still Out Evening	14237	95%	5%

Date	Time Sent	Channel	Campaign Type	Total Sent	% Successfully Delivered	% Unsuccessful
2/26/2026	6:14 PM	Voice	Still Out Evening	6721	80%	20%
Friday, February 27, 2026						
2/27/2026		Email	Still Out Morning	1305	99%	1%
2/27/2026	8:41 AM	SMS	Still Out Morning	2151	98%	2%
2/27/2026	8:49 AM	Voice	Still Out Morning	1184	71%	29%


Table 29. A list of all customer communications provided to those without power.

11.5 Communication With Media Relations and Social Media Activities

11.5.1.1 Eversource.com

Eversource posted a banner message at the top of its website on Saturday, February 21st, notifying customers that the Company was preparing for an approaching storm. The banner linked to a prepared page that contained tips on actions customers could take to be ready. On the morning of Monday, February 23rd, both the banner on the front page of the website and the page with outage information were updated with information that blizzard conditions were limiting Eversource's immediate ability to respond to community priorities and outages.

As the storm began to wane, messaging on the website was updated to reflect that Eversource had a plan for strong, timely restoration with an expanded workforce. Both the banner and the page with outage information were regularly updated throughout the event to reflect the latest news on restoration – including the global and town-level ETRs, once announced. The list of town-level ETRs was updated several times after posting to reflect the substantial completion of work in individual communities.

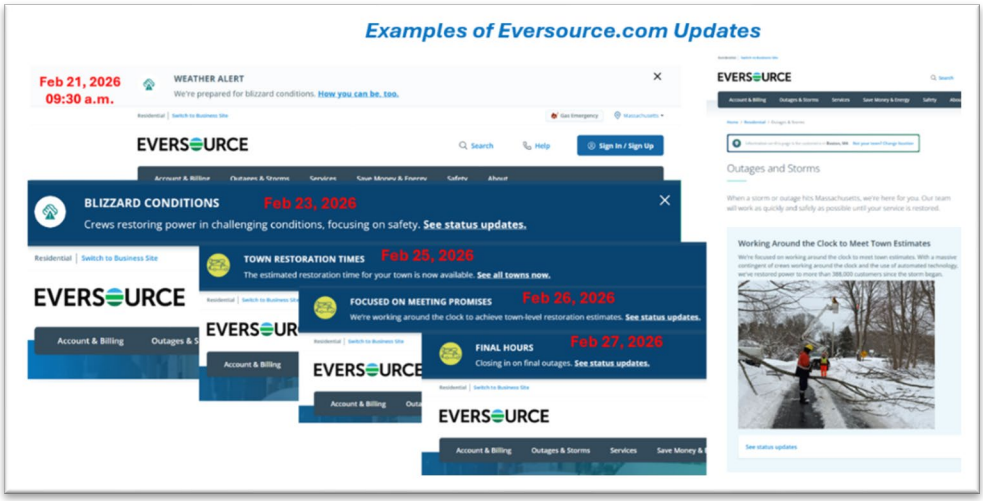

The website was returned to normal operations overnight on Friday, February 27th into Saturday, February 28th, following Eversource's achievement of substantial completion of restoration in all individual communities. Fifty-one content updates were made to different areas of the website between February 21st and 28th. Customers who remained without power still could utilize the outage map and updates were provided via social media and directly to customers through their channel of choice.

Statistics on visits to outage- or storm-related areas of the website are provided below. Unique visitors represent total individuals coming to the site; visits represent one visit to the site; and page views include page refreshes:

Self-Service Tools:

- Outage Map Total Visits: 640,686
- View and Report an Outage Page Total Visits: 373,171

Outages and Storms main page:

- Page Views: 314,952
- Visits: 241,843
- Unique Visitors: 138,757

MA Storm Status page:

- Page Views: 82,951
- Visits: 69,587
- Unique Visitors: 42,938

Town-level ETRs page:

- Page Views: 83,551
- Visits: 63, 521
- Unique Visitors: 41,007

Other popular pages:

- Restoration Process: 44,910 page views
- Outage Alerts: 28,838 page views
- Storm Preparedness: 21,563 page views

11.5.1.2 Social media accounts (Facebook, Instagram, X, and LinkedIn)

Eversource began posting storm preparation messages across its social media accounts on Saturday, February 21st. These early messages mentioned that Eversource was preparing for a powerful nor'easter and guided customers toward preparation information. Proactive messaging provided updates on

Eversource's storm response – making clear on the first day that the company's ability to respond would be limited by weather and travel conditions, then sharing the latest information on the Company's significantly expanded workforce and its progress responding to community issues and customer outages.

Video of all three media availabilities was posted to the social accounts, and the global and town-level ETRs were shared as soon as they became available. Social posts also highlighted video interviews with employees who shared their perspectives on storm restoration, helping to connect customers to the people behind the work.

Perhaps the most notable aspect of social media during this storm was the strongly positive response from customers and community leaders, shown in the Inbound Sentiment results below. Customers understood the difficult conditions field crews were facing and thanked them for their hard work. Despite the challenges and frustrations of a multi-day storm response, public safety officials from multiple towns posted thank-you messages to Eversource, acknowledging the Company's commitment to serving customers and communities. Eversource reposted some of these videos with messages of thanks for the community leaders' cooperation and support.

Eversource's Customer Group also handled customer social care interactions via incoming social media comments.


Eversource's outbound social media effort, by the numbers:

- Number of outbound posts across all channels: 136
    - Includes 90 on MA-specific Facebook and X channels, as well as seven on companywide Eversource Energy's LinkedIn account and 39 on Eversource Energy's Instagram account
- Engagements:* 36,799
- Inbound mentions and messages:* More than 5,600
- Inbound Sentiment:*36.4 percent Neutral, 59.6 percent Positive, 4 percent Negative


*Results marked with * are results for all of the Eversource Energy operating companies, although Eversource's social media accounts in Massachusetts accounted for the majority of social interactions, since the impacts of the storm were highest there.*

Sample proactive social media messages:
(Note that similar messages were posted simultaneously on both Facebook and X, with Facebook messages typically including more text to take advantage of the additional space offered by the platform)


February 22, 7:15 p.m.:

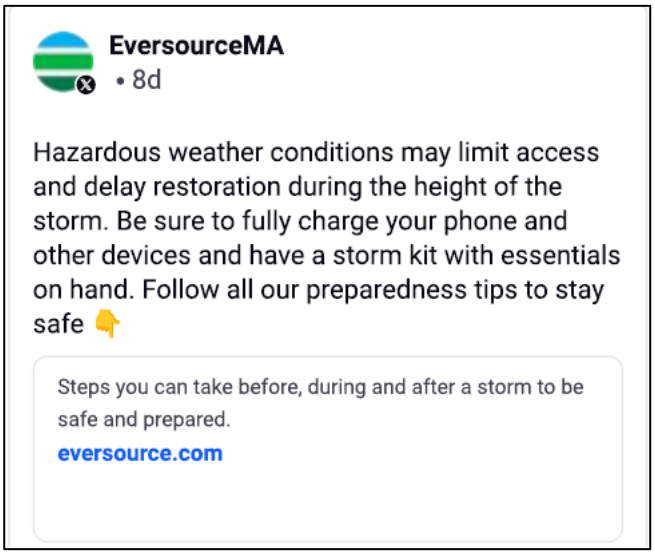


February 23, 10:38 a.m.:

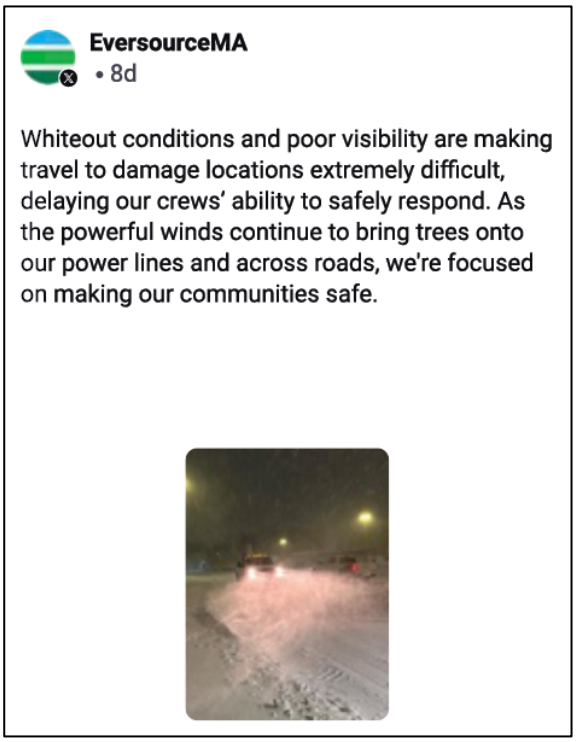


February 23, 3:30 p.m.:

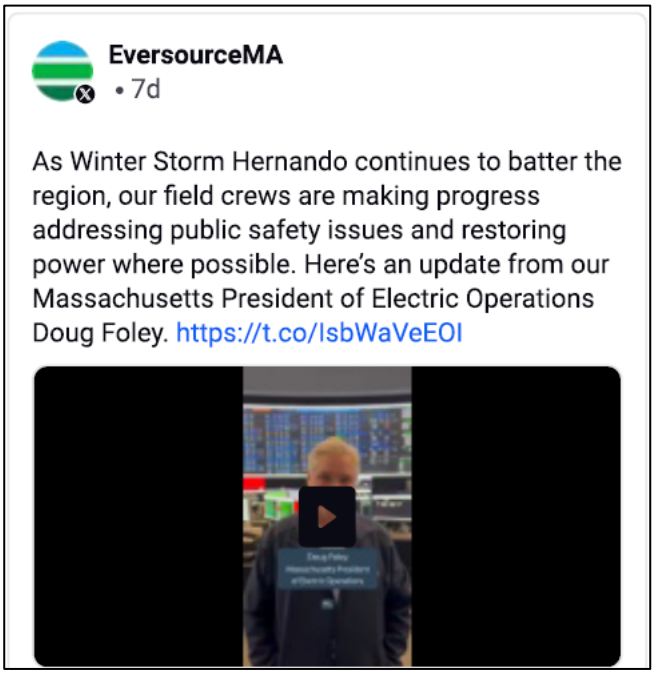


February 24, 11:11 a.m.:

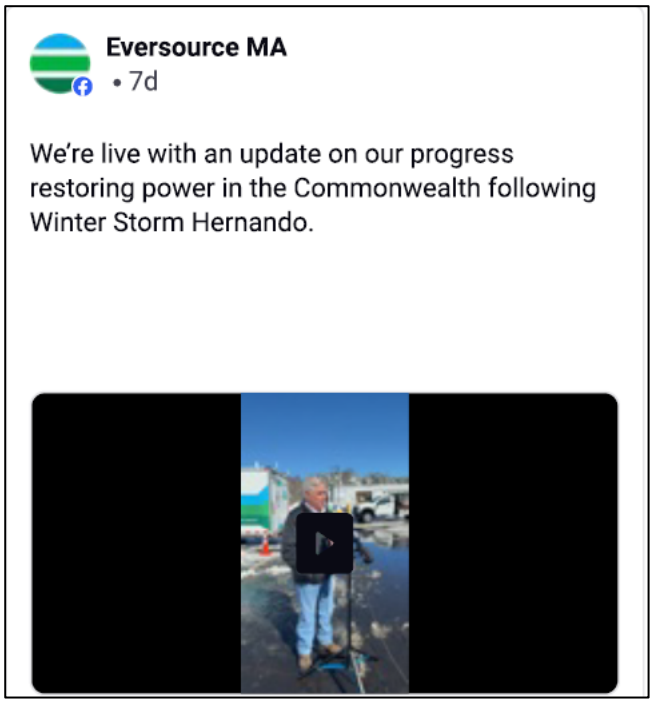

February 24, 1:43 p.m.:

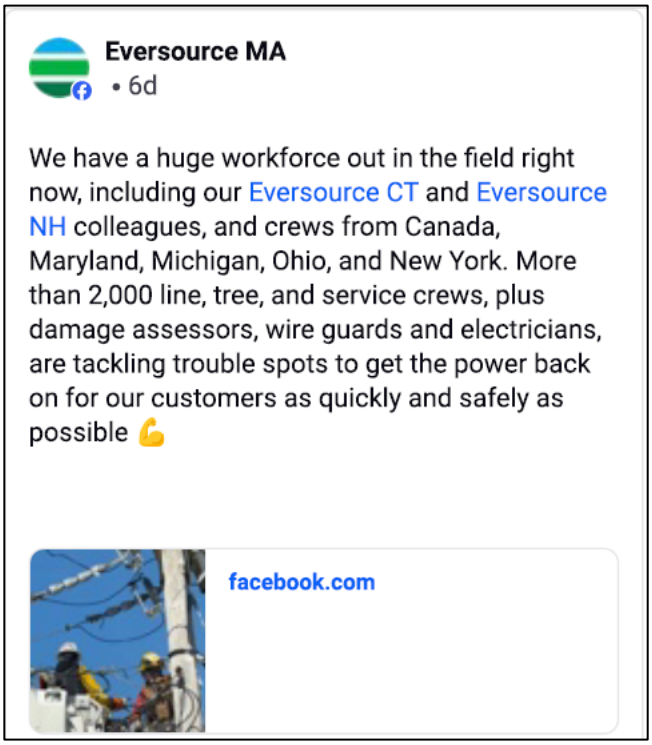


February 24, 7:57 p.m. and 8:35 p.m.:

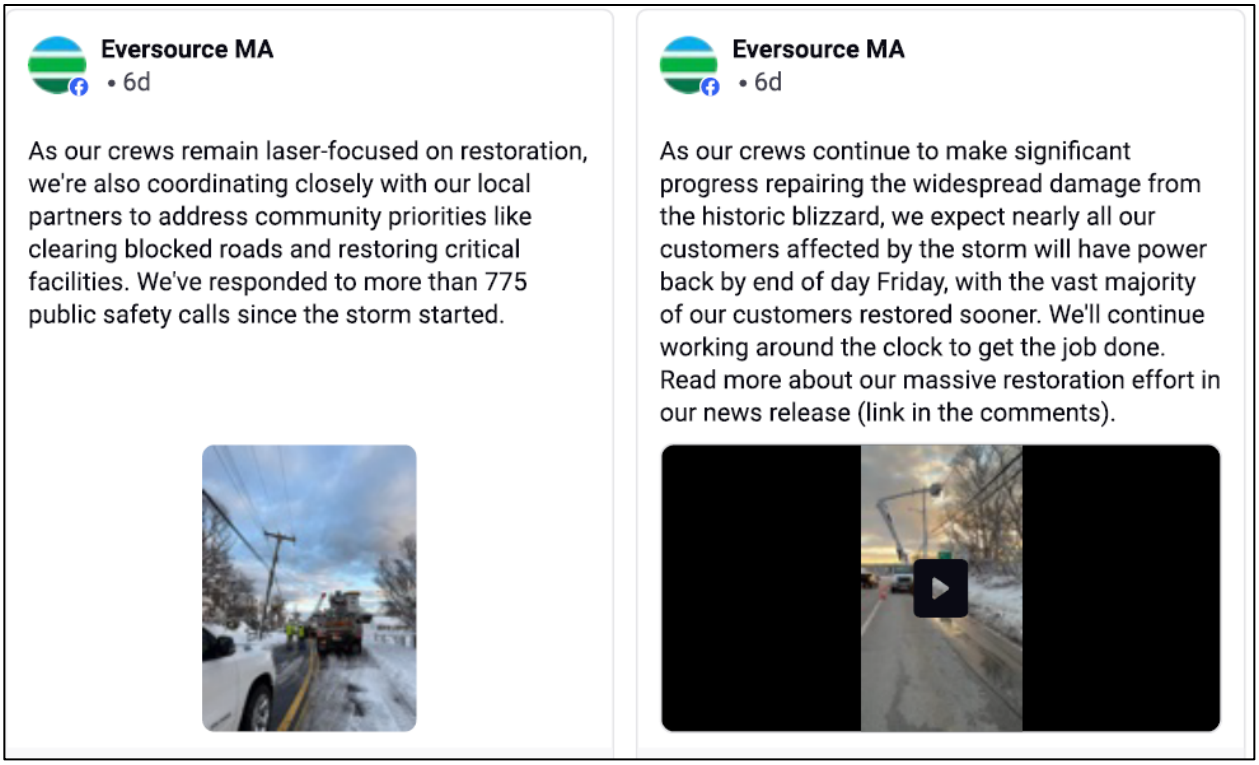


Feb. 25, 8:51 a.m.:




Feb. 25, 4:36 p.m.:

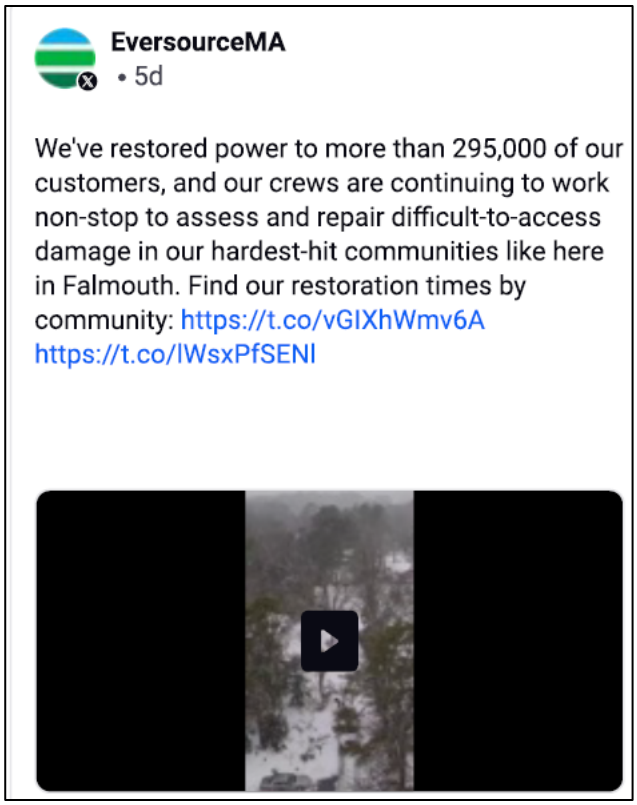


Feb. 26, 8:45 p.m.:

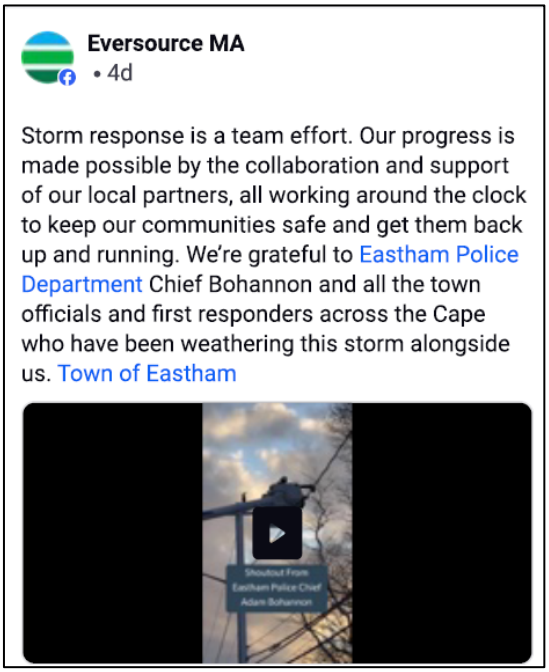


Feb. 27, 10:23 p.m.:

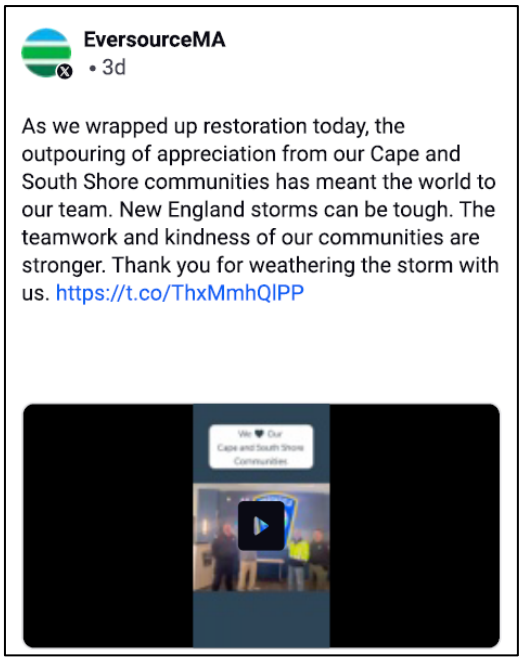


Feb. 28:

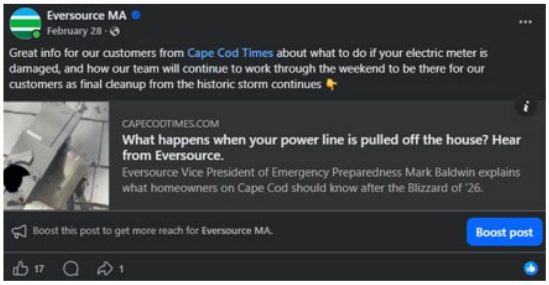
Eversource MA
February 28 ·
Great info for our customers from Cape Cod Times about what to do if your electric meter is damaged, and how our team will continue to work through the weekend to be there for our customers as final cleanup from the historic storm continues 👇
CAPECODTIMES.COM
What happens when your power line is pulled off the house? Hear from Eversource.
Eversource Vice President of Emergency Preparedness Mark Baldwin explains what homeowners on Cape Cod should know after the Blizzard of '26.
Boost this post to get more reach for Eversource MA.
Boost post
17
1

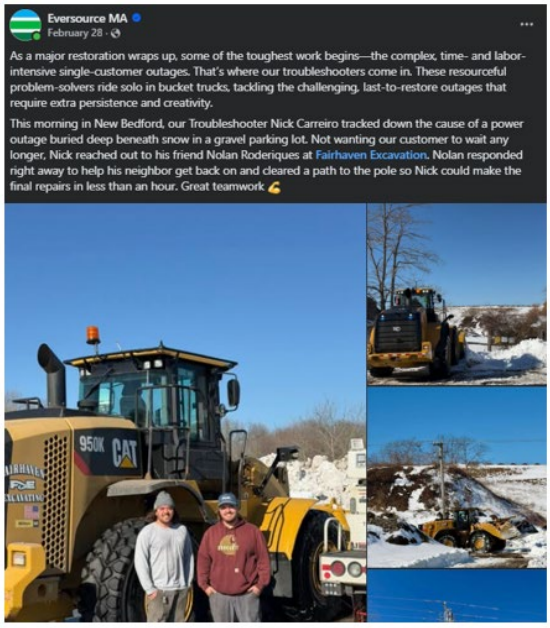
Eversource MA
February 28 ·
As a major restoration wraps up, some of the toughest work begins—the complex, time- and labor-intensive single-customer outages. That's where our troubleshooters come in. These resourceful problem-solvers ride solo in bucket trucks, tackling the challenging, last-to-restore outages that require extra persistence and creativity.
This morning in New Bedford, our Troubleshooter Nick Carreiro tracked down the cause of a power outage buried deep beneath snow in a gravel parking lot. Not wanting our customer to wait any longer, Nick reached out to his friend Nolan Roderiques at Fairhaven Excavation. Nolan responded right away to help his neighbor get back on and cleared a path to the pole so Nick could make the final repairs in less than an hour. Great teamwork 💪
950K
CAT


Eversource MA
February 28 ·
"The first day was bad because of the conditions, but today was the toughest," a member of our field team said of tackling hundreds of complex, single-customer jobs. Today, our crews hung miles of new wire and replaced an additional 42 transformers damaged by the historic blizzard. These smaller power outages often aren't visible until we restore power to the larger sections of our electric system. When the lights come back on for most, we continue the detailed, labor-intensive work of tracking down individual service issues, repairing service lines to customers' homes, and straightening leaning power lines like here in Provincetown where we worked on 14 utility poles. If you still don't have power, please report your outage so that we can send a crew to troubleshoot. We won't stop working around the clock until everyone's back on.

Mar 2:

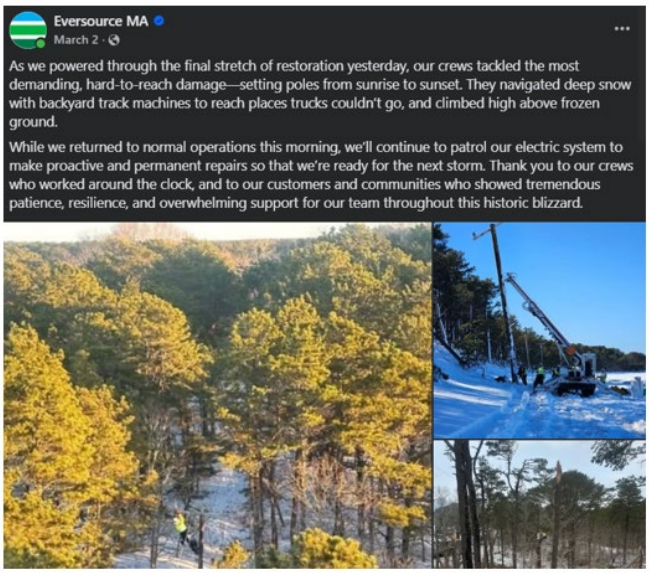
Eversource MA
March 2 ·
As we powered through the final stretch of restoration yesterday, our crews tackled the most demanding, hard-to-reach damage—setting poles from sunrise to sunset. They navigated deep snow with backyard track machines to reach places trucks couldn't go, and climbed high above frozen ground.
While we returned to normal operations this morning, we'll continue to patrol our electric system to make proactive and permanent repairs so that we're ready for the next storm. Thank you to our crews who worked around the clock, and to our customers and communities who showed tremendous patience, resilience, and overwhelming support for our team throughout this historic blizzard.

Mar 3:


Eversource MA
March 3 ·
👀 Peek behind the scenes of storm coordination with the Eastham Police Department.
In hard-hit communities, our liaisons join local police, fire and town leaders to review real-time outage data, prioritize public safety issues and align our restoration plans to the community's unique needs. Having decision-makers from multiple departments in one room allows information to move quickly and resources to be deployed efficiently.
It's all about getting our customers back on and our communities up and running.

11.6 NEWS RELEASES AND MEDIA OUTREACH AND RESPONSE

In the days preceding the storm, Eversource's External Communications department responded to numerous inquiries regarding the Company's preparation activities from broadcast, print, and digital media outlets, predominantly in EMA.

Following the storm's arrival, External Communications issued two news releases on Monday, February 23rd, then one per day for Tuesday, February 24th through Friday, February 27th. These news releases provided updates on Eversource's storm response, including the expansion of the Company's field workforce, and set expectations regarding the difficult travel and work conditions that crews faced. The news releases also communicated the global and town-specific ETRs when those were announced.

While the storm was ongoing on February 23rd, External Communications arranged interviews for numerous media outlets with Doug Foley, President of Electric Operations, Massachusetts. External Communications also arranged three in-person media availabilities with Doug Mr. Foley on February 24th, 25th, and 26th. These events were held at three separate locations – Yarmouth, Plymouth, and Falmouth – within the hardest-hit areas of Cape Cod and Southeastern Massachusetts. External Communications posted recordings of the media events on Eversource's social media channels, and provided them to media outlets that were interested but unable to attend. External Communications also helped media outlets access work sites where footage of crews working could be safely taken.

Below are links to a sampling of the many stories that External Communications contributed to over the course of the storm response. This list focuses on major regional outlets and does not include smaller local newspapers and other media:

Print:

Boston Globe:

- Healey Declares State of Emergency for Massachusetts Ahead of Potential Historic Snow Storm
- Number of Power Outages in Massachusetts Falls Below 4,000
- More Than 290,000 Customers Without Power in Mass., R.I. As Blizzard Bears Down
- Power Outages Plague Much of Eastern Mass
- Eversource: Restoring Power for All Customers May Take a 'Couple Days'
- After the Blizzard, the Big, Brutal Dig
- More Than 195,100 Customers in Massachusetts Still Without Power As Utilities Bring In Additional Crews
- About 100,000 Residents, Mostly on the Cape and in Plymouth County, Remain Without Power Wednesday
- With No Power, No Snow Plows in Duxbury, Neighbors Helped My Family Reach Safety
- About 100,000 Residents, Mostly on the Cape and in Plymouth County, Remain Without Power Wednesday
- Stuck Inside for Days, South Coast and Cape Cod Residents Wonder When the Plows Will Arrive
- Portions of Cape Cod Still Suffering From Widespread Power Outages After Historic Blizzard

Boston Herald:

- The Blizzard of '26: Massachusetts Pounded by Nor'easter That Sparks Travel Ban, Power Restoration Will Take Days
- Massachusetts Blizzard of '26 Cleanup Efforts Barrel Ahead; Boston Schools Set To Reopen
- Power Outages Plummet to Around 1,700 As Bay State Digs Out
- Massachusetts Blizzard of '26 Cleanup Efforts Barrel Ahead; Boston Schools Set To Reopen
- Massachusetts Power Outages Drop to Under 30,000, While Some Residents Still 'Snowed In'

The New York Times:

- More Than Half a Million Customers Have Lost Power on East Coast

TV:

WCVB:

- Eversource Prepares Crews and Equipment Ahead of Major Winter Storm
- Eversource Power Outages Continue To Drop Across Massachusetts
- Eversource Energy Nears Full Restoration; 1,700 Customers Still Without Power
- Eversource Energy Restores Power to Vast Majority on Cape
- Power 'Substantially' Restored to Cape Cod Residents Days After Historic Blizzard
- Eversource Deploys Drones, Reinforcements As Power Restoration Efforts Intensify
- Eversource Gains Ground As Grateful Cape Residents Thank Out-of-State Crews
- Nor'easter Hits Massachusetts: Intensity Peaks Early Monday With Snow, Wind, Flooding
- Eversource Responds to Widespread Power Losses Amid Thundersnow in Scituate
- Gov. Healey Declares State of Emergency As Mass. Communities Brace for Major Nor'easter
- Eversource Begins Damage Assessments After Brutal Conditions Halt Restoration
- Tracking Power Outages During Nor'easter's Impact on Massachusetts
- Power Could Be Out for Days on Parts of Cape Cod After Blizzard: Tracking the Outages
- Eversource Urged To Provide Estimates As Healey Surveys Cape Damage
- Eversource Coordinates With Towns As Officials Urge Residents To Stay off Roads
- Eversource Warns Power Restoration Could Take Several Days Due to High Winds
- Eversource Urges Public To Avoid Downed Power Lines During Major Snowstorm
- Eversource Prepares Crews Ahead of Long-Duration Blizzard
- Eversource To Handle Downed Wires As Town Crews Focus on Storm Cleanup
- Eversource Plans Yarmouth News Conference As Cape Cod Grapples With Widespread Outages
- Eversource: Power Outages Could Last Until Friday for 200K+ Customers
- Eversource: Hundreds of Thousands in Massachusetts Face Widespread Outages
- Eversource Reports 135,000 Customers Without Power As Nor'easter Continues
- Over 250,000 Without Power in Massachusetts As Cape Communities Face Total Outages
- Eversource: 183,000 Customers Without Power in Massachusetts Amid Storm
- Eversource: Widespread Outages in Scituate Amid High Tide and Downed Lines
- Eversource Plans 11 A.M. Update As 51% of Sandwich Customers Remain in the Dark
- Front-End Loaders, Shovels and Teamwork Clear Southeastern Massachusetts Neighborhoods
- Eversource Energy Nears Full Restoration as 2,000 Customers Remain Without Power
- Eversource Energy Nears Full Restoration as 1,600 Still Await Power After Blizzard
- Eversource Sets Up Mobile Command Center As 252,000 Remain Without Power in Massachusetts
- Eversource Brings In Snow Equipment As Grateful Customers Get Power Back
- Eversource Warns Some Massachusetts Outages Could Last up to Five Days

- Eversource: Power May Not Return Until Friday for Thousands on Cape Cod
- Eversource Warns Cape Customers Restoration Could Take Several Days
- Eversource Restores 400,000 Customers, 62,000 Still Without Power After Blizzard
- Power Outages on Cape Begin To Decrease; World Central Kitchen Providing Hot Meals
- Eversource: Friday Target for Cape Restoration As 160K+ Remain in Dark
- Massachusetts School Districts Cancel Classes for Thursday, Friday
- Eversource Update: 70K+ Still Without Power on Cape Cod
- Over 130,000 in Southeastern Massachusetts Still Without Power Weeks After Blizzard
- Cape Cod Still Dealing With Significant Power Outages After Blizzard
- Eversource Reports 61,000 Still Without Power As Restoration Continues on Cape Cod
- Eversource Energy Warns of Voltage Issues as Power Returns to Cape Cod

WBZ:

- Eversource: Crews Working Around the Clock Amid Severe Storm Damage
- Cape Cod Nears Full Power Restoration After Blizzard
- Massachusetts Blizzard Recovery Continues
- Eversource Energy Nears Full Power Restoration After Major Storm
- Eversource Targets Full Restoration for Most Customers, 4600 Still Affected
- Eversource Restores Power to Thousands in Southeastern Massachusetts
- Massive Power Restoration Underway in Massachusetts After Blizzard
- Eversource: Crews Working Through the Night Amid Ongoing Storm Damage
- Eversource Reports Power Outages Topping 100,000 As Crews Work Around the Clock
- Eversource Aims for Friday Restoration As Buried Roads Slow Progress in Plymouth
- Eversource Warns Restoration Could Take 3–5 Days Due to Treacherous Conditions
- Eversource Estimates 3–5 Days for Full Power Restoration Amid Blizzard Conditions
- Eversource Expects 3–5 Days To Fully Restore 280,000+ Massachusetts Outages
- Eversource Brings In Out-of-State Crews As Blizzard Conditions Hamper Restoration Efforts
- Eversource Crews Assess Damaged Properties Amid Restoration Efforts
- Eversource Crews Make Progress with Power Restoration, Expected Completion Soon
- Eversource Issues Multi-Day Restoration Warning: 300K Still in Dark After Blizzard
- Eversource Crews Mobilize in Yarmouth As Gas Station Canopy Collapse Shows Storm's Fury
- Eversource Addresses 251,000 Outages Concentrated on Cape and South Shore
- Eversource Brings In Out-of-State Crews As Outages Near 300,000 Peak
- Eversource Customers Among Nearly 200,000 Without Power After Storm Damage
- Eversource: Crews Working Around the Clock Amid Southeastern Massachusetts Outages
- Eversource Nears Completion of Power Restoration After Blizzard

- Eversource Sees Progress Restoring Power After Blizzard, Thousands Still Without
- Eversource: Crews Working Around the Clock Amid Storm, Restoration Pace Dictated by Safety
- Eversource Crews From Detroit and Canada Aid South Shore and Cape Restoration Efforts
- Eversource VP Cites Hurricane Winds, Deep Snow in Outage Battle
- Eversource Says Restoration Will Take Days As 250,000 Remain Without Power
- Eversource: Crews Ready 24/7, Storm Conditions Slow Power Restoration
- Eversource: Wednesday Snow Delays Progress, Trees To Blame for Most Damage
- Eversource Crews Plan Response Amid New Bedford Blizzard
- Eversource Aiming for Nearly Full Power Restoration by Friday Night
- Eversource Brings Out-of-State Crews As Statewide Outages Near 300,000
- Eversource Coordination Focuses on Safe Access for Power Restoration
- Eversource Faces Blizzard Challenges, Restores 100,000+ Customers
- Eversource Crews Strategize Amid 276,000+ Power Outages in Massachusetts
- Eversource Brings Crews From Other States As Cape Power Outages Persist
- Eversource Crews Race To Restore Power As 250,000 Customers Remain Without Electricity
- Eversource Reports 3,000+ Outages As Restoration Progress Continues
- Eversource Deploys 2,000 Line Crews in Southeastern Massachusetts
- Eversource Aims To Restore Power As 170K Remain in Dark, More Snow on the Way
- Eversource Aims for Near-Complete Power Restoration by Friday After Blizzard Devastates Eastern Massachusetts
- Over 161,000 Without Power As Crews Battle Blizzard Aftermath in Southeastern Massachusetts
- Eversource Restoration Slowed by Weather As 160,000 Remain Without Power
- Massachusetts Power Restoration Effort Intensifies As Blizzard Outages Persist
- Eversource Deploys 2,000 Crews Across Southeastern Massachusetts
- Eversource Turns to Drones After Snow Slows Damage Inspection
- Blizzard Recovery Continues As Thousands Remain Without Power in Massachusetts
- Cape Cod Power Restoration Progress After Blizzard
- Eversource Crews Push To Restore Power Across Cape Cod After Blizzard
- Eversource Nears Full Restoration As Warmer Weather Brings Relief After Blizzard
- Crews Work Around the Clock As Tens of Thousands Remain Without Power After Blizzard
- Eversource Continues Power Restoration in Plymouth Amid Snowstorm Challenges

Boston 25

- Utility Companies Brace for Blizzard As Power Outages Likely, and Some Restorations Could Take Days
- Eversource Works Around the Clock As Cape Cod Power Outages Persist
- Governor Maura Healey Declares State of Emergency As Nor'easter Approaches Massachusetts
- Eversource Deploys Hundreds of Crews As Nor'easter Raises Outage Concerns
- Eversource Nears 100,000 Customers Restored As Blizzard Outages Persist on Outer Cape
- Eversource Warns 3–5 Day Outages Possible As High Winds Threaten Power Lines
- Eversource: Progress Continues but 72K Still in Dark Across Massachusetts
- Eversource Bringing In Crews From Outside Mass. As Part of 'Multi-Day' Restoration Effort
- Eversource: Harsh Winter Conditions Slow Power Restoration Efforts
- Eversource Aims for Friday Night Restoration As 70K+ Remain Without Power
- Eversource Reports 80,000 Power Outages As Winter Storm Continues
- Eversource Warns Residents To Stay Clear of Live Wires After Storm Damage in Scituate
- Blizzard Leaves 69% of Plymouth Without Power As Eversource Crews Mobilize
- Eversource: 164,000 Customers Affected by Eastern Mass Outages
- Eversource Deploys 1,000+ Crews During Fall River Blizzard
- Eversource Brings Extra Crews To Manage Massachusetts Power Outages
- Eversource Restores 110,000+ Customers Using Remote Technology During Storm
- Eversource: 62,000 Still Without Power As Crews Push Toward Full Restoration
- Power Outages Drop, Eversource Deploys Massive Crew Response After Blizzard
- Eversource Prepositions 500 Crews, Restores 110,000 Customers After Blizzard
- 'It's Going To Be Difficult': Boston 25 Crews Stuck, Thousands Without Power After Blizzard
- South Shore, Cape Cod Residents in Dark, Cold After Wind-Blown Snow Batters Communities
- Eversource: Full Power Restoration Expected by Friday After Massive Storm Outages
- Eversource Prioritizes Public Safety and Roadway Hazards During Storm Restoration
- Eversource Conducts Damage Assessments As 250,000 Remain Without Power on the Cape
- Eversource Deploys 2,000 Crews As 250,000 Remain Without Power Statewide
- Eversource Aims for Evening Restoration As Families Endure Days Without Heat
- Eversource Reports Steady Progress As Cape Outages Continue To Decline
- Eversource Reports Major Progress As Outages Drop but Cape Communities Still Hit Hard
- Eversource Reports Catastrophic Damage As Crews Work To Restore Power to 244,000 Customers

- Cape Cod Digs Out: Thousands Still Without Power Following Historic Blizzard
- Eversource: Power Restored to 400K Since Start of Blizzard, 2,000 Line Crews Still Working in Area
- Eversource Prioritizes Large Circuits First As National Grid Aims for Thursday Restoration
- Some Mass. Schools Will Be Closed Again on Wednesday After Blizzard Battered Region
- Eversource Brings Out-of-State Crews As Nearly 300K Face Multi-Day Outages
- Eversource Outages Drop to 213K As Damage Assessments Begin
- Eversource: Nearly 300K in Dark as Out-of-State Crews Join Fight
- Live Blizzard Aftermath Updates: Mass. Begins Cleanup After Historic Snowfall in New England
- Eversource Outages Drop Below 200K As Worker Compares Damage to Tornadoes
- Two Days After Storm, Thousands Still in the Dark
- Eversource Targets Friday Night for Full Restoration As 250K+ Remain Without Power
- Contractors From Canada, Detroit Among Crews Working To Restore Power in Mass., Eversource Says
- Thousands of Crews Mobilized As Cape Outages Persist
- Eversource Works Around the Clock As Thousands Remain Without Power on South Shore and Cape
- Eversource Works Around the Clock To Restore Power Across Southeastern Massachusetts
- Massive Power Outages Persist in Plymouth As Eversource Works Around the Clock
- Eversource Nears Completion of Massive Power Restoration After Blizzard
- Many Still Without Power in Plymouth As Eversource Crews Continue Restoration Process
- Eversource Targets Friday for Full Restoration After 300,000 Lose Power

NBC Boston:

- Thousands of Power Outages Reported Across New England
- Eversource Energy Crews Push Toward Full Restoration as Outages Drop on Cape Cod
- Outage Numbers Drop to 4500, Eversource Expects Full Restoration by Tonight
- Eversource Addresses Power Outages As Crews Work To Restore Service
- Eversource Outage Map Shows Widespread Coastal Power Losses As Crews Work To Restore Service
- Eversource Targets Friday Midnight As Cape Homes Hit 45°F Inside
- Eversource Brings 500+ Additional Crews From out of State for Outages
- Eversource Prioritizes Power Restoration for 911 Emergencies in Massachusetts
- Eversource Continues Power Restoration Amid Blizzard Aftermath

- Eversource Reports 142,000 Customers Without Power Across Coastal Massachusetts
- Eversource Reports 62,000 Customers Still Without Power on Cape Cod After Blizzard
- Eversource: Crews Working Remotely As Storm Causes Widespread Downed Wires
- Eversource Monitors High Winds and Flooding in Local AreaEversource Monitors High Wind
- Local Businesses Offer Free Lunch to First Responders in Cape Cod
- Eversource: Outer Cape and Massachusetts Coasts Face Near-Total Power Outages
- Outages Drop to 69,000 As Eversource Targets Midnight Friday Restoration
- Eversource Coordinates Power Restoration Amid Major Storm
- Over 196K Remain Without Power in Mass. As Blizzard Cleanup Continues
- Power Outages Still Linger on the Cape
- Eversource To Provide Update As Power Returns Across Cape Cod
- Eversource Crews Advance Restoration As Weather Conditions Improve
- Eversource Liaison Assists Sandwich As Power Restoration Expected To Take 3–5 Days
- Eversource Energy Expects Most Power Restored Today After Widespread Blizzard Outages
- Duxbury Fire Chief: Working Closely With Eversource To Restore Power Within 48 Hours
- Eversource Responds to 230+ Safety Emergencies Amid ‘Catastrophic’ Cape Damage
- Eversource Tackles 230+ Safety Hazards After ‘Catastrophic’ Cape Cod Blizzard
- Eversource: ‘Army of Utility Trucks’ Moves In To Assess ‘Catastrophic’ Damage
- Eversource Focuses Restoration Efforts on Cape As 75% Remain Without Power
- Eversource Urges Patience As Crews Tackle Widespread Outages After Storm
- Eversource Liaison Supports Restoration As 50% of Town Remains Without Power
- Eversource Prioritizes Public Safety, Clears 230 Hazard Sites During Storm
- Eversource Updates Restoration Efforts As Cape Outages Dominate Statewide Totals
- Eversource Deploys All Hands on Deck As Coastal Communities Face Major Outages
- Eversource Restores Power to Hundreds of Thousands After Blizzard, 62,000 Still Without
- Eversource Focuses on Cape Towns As Many Report 100% Power Outages
- Eversource Works To Restore Power After Record Blizzard
- Eversource: ‘Army of Utility Trucks’ Hits Cape As Residents Call Storm ‘Very Bad’
- Eversource Works Around the Clock As Blizzard Leaves 100,000 Cape Cod Homes Without Power
- “Catastrophic” Damage on Cape Cod As Eversource Targets Friday Restoration
- Eversource Battles Blizzard Aftermath As Thousands on Cape Remain Without Power
- Thousands Still Without Power As Utility Crews Continue Work on Cape Cod
- Eversource Focuses on Cape As 62,000 Remain Without Power After Blizzard
- Cape Cod Power Restorations Continue After Blizzard
- Free Lunch for Eversource Crews, First Responders in Brewster Today

- Eversource Targets Friday Midnight Restoration As 70,000 Remain Without Power After Blizzard

WHDH:

- Power Outages Mount Across Cape and South Shore As Blizzard Winds Batter Massachusetts
- More Than 250,000 Without Power in Mass
- Eversource Responds As Nearly Half of Scituate Loses Power During Coastal Storm
- Eversource Reports More Than 140,000 Customers Without Power Amid High Winds
- Eversource: 150,000 Customers Without Power, Crews Ready but Patience Needed
- Eversource: 230,000 Customers Without Power, Restoration Could Take Days
- Eversource: 100% of Scituate Customers Lose Power Amid Flooding
- Power Restoration Work Ongoing, More Than 100,000 Still in the Dark on Cape Cod
- Tens of Thousands Still Without Power on Cape Cod
- Eversource Targets Friday Night Restoration As 60,000 Remain Without Power on Cape Cod
- Eversource Restores Power to 300,000 As Crews Push Toward Full Recovery on Cape Cod
- Power Restored to Majority of Cape Cod
- Eversource Nears Full Restoration as Blizzard Recovery Continues Across Cape Cod

Telemundo:

- Winter Storm Causes Massive Power Outages in the Tri-State Area

WWLP:

- Eversource Restores 100,000+ Customers With 1,000 Crews on the Job
- Eversource Restores 140K, Warns Others May Wait Days for Power
- Eversource Restores Thousands, but 160,000 Still Without Power Across Massachusetts; Cape Hit Hardest
- Eversource Energy Completes Statewide Restoration Ahead of Schedule After Historic Nor'easter
- Eversource Restores Power to Hundreds of Thousands After Historic Blizzard
- Eversource Restores 40,000 Customers As 3,000 Remain Without Power in New Bedford
- Eversource Restores Thousands of Outages, but Over 100,000 Still Without Power
- Eversource Updates Power Restoration After Historic Blizzard
- Over 60,000 Still Without Power in Eastern Massachusetts Following Blizzard
- Eversource Energy Restores 99% of Customers After Historic Nor'easter
- Eversource Energy Completes Power Restoration After Historic Nor'easter

Western Mass News:

- Longmeadow Residents See Power Outages, Road Closures
- Eversource Crews Respond to Downed Power Lines in Hazardville and Longmeadow
- Eversource Works To Restore Power Amid Downed Lines on William Street
- Eversource Brings Crews From Texas to Maine As Outages Could Last 5 Days
- Eversource Brings Crews From Texas to Maine, Aims for Friday Power Restoration

National:

The Weather Channel:

- Eversource: 222K Still Without Power in Multi-Day Restoration
- Power Outages Drop to 158,000 As Eversource Targets Late Friday Restoration
- Southeastern Massachusetts Residents Frustrated As New Snow Falls Amid Ongoing Power Outages
- Storm Surge and Leaning Power Lines Slow Restoration Efforts in Plymouth Beach

Live Now FOX:

- Eversource Crews on Standby As High Winds Raise Outage Concerns
- Eversource Faces Access Challenges As 290,000 Power Outages Persist in Massachusetts
- Eversource Addresses 290,000 Power Outages Across Massachusetts, Focuses on South Coast

NBC New York:

- Monster Blizzard Causes Massive Power Outages Across Tri-State

CBS News:

- Power Outages in Massachusetts Leave More Than 267,000 in the Dark During Blizzard of 2026
- Eversource Says Power Restoration on Cape Cod Will Take Days After Blizzard of 2026
- Boston Couple Elopes During Blizzard After Snow Cancels Wedding Plans
- Eversource Provides Latest Update on Power Restoration After Massachusetts Blizzard
- Some Plymouth Roads Unplowed Days After Blizzard, Power Restoration Efforts Continue
- Eversource Gives Update on Power Outage Restoration Estimates for Cape Cod and Eastern Massachusetts

- Eversource Gives Update on Power Outage Restoration in Eastern Massachusetts After Blizzard
- Coffee Shop in Plymouth Without Heat Rallies To Serve Hundreds in Community Without Power
- Cape Cod Woman Thrilled After Eversource Says Power Is Expected To Return on Friday

BBC World News:

- Eversource Tackles 20,000 Outages in Massachusetts and Connecticut

NBC News Now

- Eversource Thanks Customers for Patience As 2,000 Crews, Drones Assess 'Impossible' Damage

CNN

- Power Outages, Travel Troubles and Bitter Cold Plague Northeast in Wake of Historic Bomb Cyclone Blizzard

Radio:

WBZ News Radio:

- Major Power Outage Leaves Hundreds of Thousands of Customers in the Dark
- Multi-Day Recovery Continues As Eversource Nears Final Phase of Restoration
- Gov. Maura Healey Lifts Travel Ban Day After Powerful Blizzard
- Cape Cod Residents Bear Brunt of Power Outages From 'Blizzard of '26′
- Eversource Says 'All Hands on Deck' Getting Communities Back On-Line
- South Shore Storm Cleanup Continues

WGBH:

- Eversource Positions Crews and Resources Ahead of Potential Power Outages
- 'Part of the Deal': Essential Workers Brave Storm As Authorities Urge Residents To Stay Home
- 250,000 Mass. Residents Still Without Power Tuesday Morning as Travel Ban Hits Three Counties
- 36 Hours Later, 160K Mass. Residents Still Without Power Wednesday

- Eversource Readies Crews To Respond To Power Outages From High Winds and Heavy Snow
- Eversource Warns of Long-Duration Outages As Crews Work Around the Clock
- Eversource: High Winds Prevent Power Restoration on Cape
- Eversource Uses Remote Technology As High Winds Delay Power Restoration
- Eversource Prioritizes Safety As Cape Cod Power Restoration Faces Delays
- Eversource Focuses Cape Cod Recovery As Crews Race Toward Friday Restoration
- Eversource Brings Crews From Detroit, Canada To Tackle Remote Cape Outages
- Eversource Brings In Crews From Canada, Detroit To Tackle Cape Outages
- Cape Cod Residents Still Without Power; Overnight Shelters Open
- GBH Daily: Can You Dig It?
- Eversource Crews Race To Restore Power on Blizzard-Battered Cape Cod
- Eversource Refocuses on Cape Cod As 100,000+ Remain Without Power
- As Utilities Work on the South Shore, Fall River Still Struggles Just To Clear Streets
- Eversource Crews Struggle Through Snow To Restore Power on Cape Cod
- Eversource Crews Work To Restore Power As Thousands Remain Without Heat
- Eversource Nears Full Restoration as Outages Drop to 4,500 Across Massachusetts

WBUR:

- Over 128,000 Without Power as Monster Storm Batters Massachusetts
- How Monday's Nor'easter Is Affecting Life in Mass
- Eversource Reports Nearly 114,000 Without Power As Storm Delays Repairs
- Eversource: Hundreds of Crews Battling Widespread Outages Amid Storm
- Eversource: Hundreds of Crews Working Amid Outer Cape Outages
- Eversource Works To Restore Power to 300,000 Customers Amid Storm
- Healey Lifts Southeastern Mass. Travel Ban As Tens of Thousands Remain Without Power
- Eversource Deploys 1,000+ Crews As 250,000 Remain Without Power Statewide
- Outer Cape Still in the Dark as Eversource Shifts Resources To Speed Restoration
- Eversource Restores 145,000 Customers As 250,000 Remain Without Power
- Southeastern Mass. Travel Ban in Effect Tuesday Morning, As 250,000 in the State Remain Without Power
- How Cape Cod and Southeastern Mass. Are Coping After Monday's Monster Blizzard
- 150,000 Eversource Customers Lose Power, Businesses Shut Down
- World Central Kitchen Comes to Cape Cod To Help in Blizzard's Aftermath

WATD:

- Eversource Deploys Helicopters, Drones As Snow Slows Power Restoration

- Eversource Deploys 1,000+ Crews As Historic Blizzard Slams Massachusetts
- Blizzard Cleanup Continues on the South Shore
- Eversource Restores Power to Nearly All Customers After Blizzard As Crews Continue Cleanup in Marshfield
- Eversource Crews Respond As Over 72% of Town Remains Without Power
- Eversource Deploys 36 Crews As 75% of Marshfield Remains Without Power
- Eversource Deploys 2,000 Crews As Cape Cod Power Restoration Enters Multi-Day Effort
- Thousands Still Without Power in Plymouth and Marshfield As Blizzard Cleanup Continues
- Eversource Continues Power Restoration in Southeastern Massachusetts After Blizzard
- Eversource Deploys 1,000 Line Crews, Urges Customers To Report "Nested Outages" As Restoration Nears Completion
- Eversource Crews Battle Widespread Damage As Restoration Speeds Up Across Region
- Eversource Reports 160,000 Outages As Crews Work Across Cape, Plymouth and South Coast
- Eversource: Plymouth, Scituate, Marshfield Restored; 52K Still in Dark on Cape Cod
- Scituate Power Restored
- Nearly All Power Restored After Last Week's Blizzard; Eversource Crews Continue Final Repairs
- Eversource Restores Power to Nearly All Customers After Last Week's Blizzard
- Eversource Nears Full Power Restoration After Blizzard
- Eversource Assures Power Restoration for Most Customers by End of Day

WRKO:

- Eversource: Some Customers Could Be Without Power for up to 5 Days
- Eversource Expects 3–5 Days To Restore Hundreds of Thousands of Outages
- Eversource Deploys 1,000 Crews As 200K+ Remain in Dark
- Eversource Deploys 1,000+ Crews As Hundreds of Thousands Remain Without Power

Text of news releases issued by Eversource Media Relations during storm response

To save space, the corporate description and contact information that appears at the end of every Eversource news release is only included for the first release.

February 23, 2026:

Eversource responding to significant power outages as massive nor'easter continues to impact Massachusetts

Additional crews will be coming to the commonwealth from other states as conditions allow

BOSTON, Mass. (February 23, 2026) — Nearly 1,000 Eversource line, tree and service crews are a part of a massive restoration effort as a slow-moving, long-duration nor'easter continues to impact Massachusetts, bringing blizzard conditions, heavy, wet snow, strong winds and extremely hazardous travel, especially across eastern Massachusetts and the Cape. The majority of outages so far are concentrated on the Cape and other coastal areas, where the storm's impacts have been most severe.

As of 1:00 p.m. on Monday, approximately 231,800 Eversource customers are without power statewide.

Eversource began taking on storm-related damage around 3:30 a.m., with outages driven by a combination of factors – primarily strong winds and heavy, wet snow causing tree-related damage to electrical equipment – particularly in coastal communities. Gusts as high as 77 mph have already been reported on Cape Cod, with strong winds continuing across much of the state. Blowing and drifting snow, poor visibility and unsafe travel conditions are limiting where crews can safely access damage, especially on the Cape. Eversource will be bringing in additional crews from other states to support restoration in Massachusetts as conditions allow and storm restoration is complete in those states.

Despite the challenging conditions, Eversource has restored power to more than 107,000 customers so far, with some of that work completed through remote system operators using automated switching technology that allows power to be safely rerouted from control centers.

In addition to the army of line, tree and service crews assembled to work on restoration on the ground in impacted communities, thousands of additional personnel across operations, logistics and support roles are supporting the response. Crews are working wherever it is safe to do so while

prioritizing public safety, including responding to 911 calls involving electrical equipment, supporting first responders and clearing blocked roads so repairs can be made safely. Because this is a slow-moving storm with prolonged hazardous conditions, restoration is expected to take place over multiple days, particularly in the hardest-hit areas.

"This is a slow-moving, long-duration storm, and the difficult travel conditions we're seeing, especially on the Cape, are making restoration more challenging," said Eversource President of Massachusetts Electric Operations Doug Foley. "Our crews are fully mobilized and have been working around the clock, but safety has to come first. In some locations, crews simply cannot access damage until conditions improve. In addition to the significant snow and wind, we're coordinating with local officials to make sure we're not in the way of their plow trucks as they work to improve roadways. To support our restoration efforts in eastern Massachusetts, we will be bringing in additional crews from New Hampshire and western Massachusetts as storm response is completed there and it's safe to do so. We know customers want answers, and we appreciate their patience and understanding as we continue to restore power as quickly and safely as possible."

Eversource reminds customers to always stay clear of downed wires, report them immediately to 9-1-1 and use caution during storm cleanup, watching for wires that may be hidden by snow or debris. Customers using generators should ensure they are operated outdoors and well away from buildings.

Customers can report outages online at Eversource.com, or by calling 800-592-2000 in Eastern Massachusetts and 877-659-6326 in Western Massachusetts.

Eversource (NYSE: ES), celebrated as a national leader for its commitment to sustainability and corporate citizenship, is named among America's Most Responsible Companies by Newsweek for

2026 and recognized as the #1 utility on USA Today's list of America's Climate Leaders for 2025. Eversource transmits and delivers electricity and natural gas and supplies water to 2.3 million customers throughout Massachusetts, including approximately 1.62 million electric customers in 159 communities, 641,000 gas customers in 125 communities, and 12,000 water customers in five communities. Eversource harnesses the commitment of more than 10,500 employees across three states to build a single, united company around the mission of safely delivering reliable energy and water with superior customer service. The #1 Energy Efficiency Provider in the Nation, the company is empowering a clean energy future in the Northeast, with nationally recognized energy efficiency solutions and successful programs to integrate new clean energy resources like a first-in-the-nation networked geothermal pilot project, solar, offshore wind, electric vehicles and battery storage, into the electric system. For more information, please visit eversource.com, and follow us on X, Facebook, Instagram, and LinkedIn. For more information on our water services, visit aquarionwater.com.

CONTACT:

Olessa Stepanova
781-441-8952
olessa.stepanova@eversource.com

Kaitlyn Woods
508-895-4888
kaitlyn.woods@eversource.com

February 23, 2026:

Additional out of state crews arriving overnight, through Tuesday to support Eversource's massive power restoration effort in Massachusetts
Devastation caused by historic blizzard creates significant challenges for crews attempting to access and assess electric damage in many coastal communities

BOSTON, Mass. (February 23, 2026) – More than 1,000 Eversource line, tree, and service crews are involved in restoration efforts across Massachusetts, as a slow-moving, long-duration

nor'easter leaves widespread power outages and extremely challenging field conditions. Cape Cod, Martha's Vineyard and other coastal communities experienced the worst of the storm and suffered the most severe damage. Even as the weather begins to ease and additional crews arrive, hazardous travel and work conditions persist, slowing restoration efforts.

Customers across Cape Cod, Martha's Vineyard, Plymouth and Bristol counties and other hard-hit communities can expect to see an army of crews working around the clock over the next several days, with additional crews continuing to arrive overnight and throughout Tuesday from New Hampshire, western Massachusetts, Connecticut and other states to support the more than 1,000 crews already in the state.

Eversource began taking on storm-related damage around 3:30 a.m. Monday, driven by a combination of hurricane-force wind gusts and heavy, wet snow bringing down trees causing damage to electrical equipment, especially in coastal communities. Although winds have deescalated from their peaks, they are still present challenges, and crews are still contending with blocked and narrowed roadways, deep snow, downed wires hidden by snowbanks, and limited access in many areas. These conditions continue to slow restoration even now that the storm is winding down.

Despite these challenges, Eversource has responded to and cleared more than 150 public safety calls and restored power to more than 116,000 customers statewide in less than 24 hours, including thousands restored through automated and remote system switching that allows power to be safely rerouted from control centers in minutes. Thousands of additional employees across operations, logistics, damage assessment and support roles are working behind the scenes to sustain this large-scale response, including community liaisons dedicated to ensuring that community priorities are addressed.

"At this point, this is clearly a large-scale, multi-day restoration effort, especially in the hardest-hit areas," said Eversource President of Massachusetts Electric Operations Doug Foley. "We already had resources pre-staged, but it simply wasn't safe to start the restoration. Customers will see a massive influx of additional crews across the Cape and other coastal communities – including bucket trucks, tree crews and damage assessors, working as quickly as safely possible to bring our customers back online. Even though the storm is beginning to ease, conditions on the ground remain extremely difficult. Crews are dealing with deep snow, blocked roads, narrow access points, and downed lines that are buried and hard to see. Working closely with our municipal partners on snow removal and access is essential to clearing blockages and reaching damage locations safely. We're bringing in additional crews from across New England to sustain this effort, and we will be working around-the-clock until the job is done."

Eversource reminds customers to stay clear of downed wires, which may be hidden by snow, report them immediately to 9-1-1, and use extreme caution during storm cleanup. Customers using generators should ensure they are operated outdoors and far away from buildings.

February 24, 2026:

Eversource estimates storm restoration will be substantially complete by end of day Friday

Energy company working around-the-clock to restore power to customers with assistance from hundreds of out-of-state crews

BOSTON, Mass. (Feb. 24, 2026) – As Eversource makes significant progress assessing and repairing the widespread damage from the historic blizzard that slammed Massachusetts, the energy company estimates nearly all customers affected by the storm will have power back by Friday at 11:59 p.m., with service being restored to the vast majority of customers before that time. With the support of additional out-of-state resources arriving from across the region overnight and throughout the day, a massive contingent of more than 2,000 resources– including line, tree and

service crews as well as other operations personnel – is working to restore power to Eversource customers across hard-hit areas including Cape Cod, Martha's Vineyard, and Plymouth and Bristol counties.

As of 4:30 p.m., Eversource has restored power to more than 185,000 customers since the storm began, including more than 43,000 customers since Tuesday morning. Approximately 211,000 customers remain without power, and Eversource will continue working around-the-clock until all customers are restored. Customers may have already received an estimated time of restoration for their specific outage. For those who have not, estimates will be provided as crews arrive on site at their location and assess the damage. Eversource will share restoration estimates for all impacted communities in a later update.



Crew restoring power in Falmouth.

"This is an all-hands on deck, multi-day power restoration effort, and we have a massive work force out in the field with crews from as far as Canada and the Midwest all working toward the same goal of restoring power for our customers," said Eversource President of Massachusetts

Electric Operations Doug Foley. “While we have been responding to this storm as quickly as safety permits, the improved weather today is allowing crews to make strong progress assessing damage across the Cape and coastal communities, making repairs and restoring service to customers. However, even though travel and work conditions are improving, there are still some locations in these hard-hit areas that are extremely challenging for our crews to access, with roads still unplowed and impassable or narrowed by snowbanks. We have even more crews from across the region that continue arriving to support our large-scale restoration effort. More than 133,000 customers without power currently have line crews actively working to repair the damage impacting them, and our team both in the field and behind the scenes is committed to working non-stop until every customer impacted by this storm has their power back on.”

Most of the devastation from this historic storm was caused by the combination of hurricane-force winds and heavy, wet snow bringing down trees onto power lines and equipment, causing widespread damage to the electric system in eastern Massachusetts, especially in coastal communities. The energy company is inspecting damage to its infrastructure from the skies, using helicopters and drones to patrol power lines and evaluate what repairs are needed. Snow removal has proven to be a significant issue, blocking access to downed wires and damaged equipment, but progress is expected to improve. With improved travel, work and weather conditions, crews will be working tirelessly over the next several days to repair the significant damage from this storm and restore power as quickly and safely as possible.

As crews remain laser-focused on restoration, Eversource is also coordinating closely with its municipal partners to address community priorities such as clearing blocked roads and restoring critical facilities. Since the storm’s onset, the energy company has responded to more than 775

public safety calls, and the company's dedicated community liaisons continue to collaborate with municipalities so they can attend to any concerns as the restoration progresses.

Eversource reminds customers to stay clear of downed wires – and keep pets away – as the lines may be hidden by snow, report them immediately to 9-1-1, and use extreme caution during storm cleanup. Customers using generators should ensure they are operated outdoors and far away from buildings.

February 25, 2026:

Eversource updates customers with local restoration estimates as crews make significant progress restoring power

Energy company restores power to more than 295,000 customers; most customers will be back on before Friday evening

BOSTON, Mass. (Feb. 25, 2026) – Eversource's army of more than 2,000 crews and resources, including hundreds of out-of-state utility workers, continue to make strong progress restoring power to customers across Cape Cod, Martha's Vineyard, and other hard-hit areas in eastern Massachusetts following the widespread damage caused by this week's historic blizzard. As of 3:15 p.m., the energy company has restored power to more than 295,000 customers thanks to the around-the-clock work of its massive contingent of crews and the use of automated technology. As crews continue to work non-stop to assess damage to the electric system and make repairs, approximately 135,100 customers remain without power.

The energy company has provided town-by-town estimated restoration times today that indicate when customers can expect restoration activities in specific communities to be substantially complete, with most restored before then. Customers can find the updated list of restoration times by community on the company's website here. Based on

the magnitude of damage along with the significant amount of crews working across the impacted areas, some customers may receive changes to their specific estimated time of restoration as work crews are assigned to make repairs and begin work at their location. Some restorations – particularly those difficult-to-access locations on snow-laden, narrowed roads in the hardest-hit communities that require the most complex repairs and impact small numbers of customers – will last until Friday.



Crews face widespread damage while working to restore power in Falmouth.

"Our dedicated field crews – alongside the hundreds of outside resources here to help – are doing a tremendous job restoring power to customers and responding to community safety priorities even as they continue to face challenging work and travel conditions, with more snow falling today and some roads still impassable or narrowed from this week's blizzard," said Eversource President of Massachusetts Electric Operations Doug Foley. "While our crews and damage assessors are reporting extensive damage caused by downed trees and tree limbs on the electric system, we are making significant progress with repairs while coordinating closely with

our communities and public safety officials to support critical facilities like hospitals and schools impacted by the storm. We know how difficult it is to be without power for any length of time, especially when it's this cold, and we're grateful to our customers and the community leaders we've worked with for their coordination, patience, and understanding. Our massive workforce is relentless in their determination to restore power for all customers, and we will not rest until the job is done."

Eversource's damage assessment from the ground and skies is ongoing today after the combination of hurricane-force winds and heavy, wet snow from the blizzard brought down trees and limbs onto power lines and electric equipment, causing widespread damage to the electric system in eastern Massachusetts, especially in coastal communities. Even as snow removal has proven to be a significant issue for crews in the field, the energy company has responded to more than 1,290 public safety calls and remains in close coordination with local officials to address community priorities such as clearing blocked roads made impassable by storm debris. Eversource continues to communicate regularly with customers as well as its municipal and state partners to provide critical information and updates as the restoration effort progresses.

The energy company urges any customers who are without power and using a generator to be sure it's running outdoors and located well away from their home or business. Eversource also reminds customers to stay clear of downed wires – and keep pets away – and report them immediately to 9-1-1. Customers should also use extreme caution during storm cleanup as downed power lines may be hidden by the deep snow on the ground.

February 26, 2026

Eversource on track to have most customers restored by Friday night as massive force of utility crews continue working relentlessly

Energy company committed to achieving town-level restoration estimates as service is restored to more than 426,000 customers

BOSTON, Mass. (Feb. 26, 2026) – As Eversource's battalion of more than 2,500 utility crews, other personnel and resources makes significant progress restoring power to customers across Cape Cod, Martha's Vineyard, and other areas in southeastern Massachusetts that experienced widespread damage from this week's historic blizzard, the energy company is laser-focused on achieving the town-level estimated times of restoration provided yesterday to the hardest-hit communities. As of 2:45 p.m., the energy company has restored power to more than 426,000 customers and expects restoration to the nearly 43,500 customers still without power to be substantially complete by tomorrow at 11:59 p.m – with the vast majority restored before that time.

"Even in the face of harsh conditions and long hours, our dedicated employees and out-of-state crews continue to give their all for our customers and are making great progress restoring power as quickly as safety allows," said Eversource President of Massachusetts Electric Operations Doug Foley. "Since we announced our town-level estimated times of restoration yesterday, our work to restore power in several hard-hit communities like Mashpee, Edgartown and Rochester has reached substantial completion, which means that power has been restored to 99% of customers in those towns. We feel an incredible sense of urgency to get this job done for our customers and are strongly focused on safely fulfilling our restoration commitments to our communities by tonight and the end of the day tomorrow."



"Additional crews have been arriving today from Rhode Island after completing restoration there to support our massive restoration effort here," Foley continued. "While we continue making great progress toward completing this critical work and achieving our estimated time of restoration, it's important to note that for a very small number of customers – particularly those in difficult-to-access locations that require the most complex, labor-intensive repairs – restoration may continue past that time. We know how frustrating it is for our customers who are still without power, and we want them to know our massive contingent of crews is working urgently and tirelessly to make the necessary repairs that will bring them back online. We won't stop until the job is done."



Ground and aerial inspections of Eversource's infrastructure remain ongoing today as crews continue to assess the widespread damage from the hurricane-force winds and heavy, wet snow that brought down trees and limbs onto the electric system in eastern Massachusetts. Since the storm began, the energy company has responded to more than 1,580 public safety calls, and its community liaisons remain in constant contact with municipal leaders about the progress of the restoration and remaining local priorities such as clearing blocked roads and supporting critical facilities. Eversource is also providing regular storm response updates to its state partners, and the energy company is proactively communicating with customers who remain without power to ensure they have the latest information about the work being done to restore their outage, as individual estimated restoration times may change as crews are assigned to the location and begin repairs.

Eversource urges any customers who are without power and using a generator to be sure it's running outdoors and located well away from their home or business. The energy company

also reminds customers to stay clear of downed wires – and keep pets away – and report them immediately to 9-1-1. Customers should continue to use extreme caution during storm cleanup as downed power lines may be hidden by the deep snow on the ground.

PHOTO 1 (top right) CAPTION: An Eversource crew conducts repair work on a snow-buried road in Falmouth.

PHOTO 2 (bottom right) CAPTION: Tree damage to the electric distribution system in Falmouth.

February 27, 2026

Eversource nears full power restoration following historic Nor'easter, meeting global estimated restoration time before Friday evening

99% of customers restored statewide as crews wrap up final repairs in hardest-hit Cape Cod communities

BOSTON, Mass. (February 27, 2026) – Eversource has substantially completed power restoration following Monday's historic nor'easter – before the previously established global estimated restoration time of 11:59 p.m. on Friday – with crews focused today on restoring service to the remaining customers affected by the storm. As of 6 p.m., fewer than 800 customers were without power statewide, and restoration has been substantially completed. In many communities, power was restored ahead of schedule, despite the severity of the storm and the challenging conditions crews faced in the field.



Crew restoring power in Orleans

Substantial completion means that 99 percent of customers have been restored to power. Crews will continue working around the clock until all customers are restored. A small number of remaining outages involve complex or difficult repairs, hard-to-access locations or situations requiring customer-owned electrical equipment to be repaired by a licensed electrician before service can be safely restored.

"Our crews worked through blocked roads, deep snow and buried equipment to restore service safely, during extremely difficult conditions." said Doug Foley, President of Electric Operations for Eversource. "This was a complex, long-duration storm that tested every part of our operations, and I'm incredibly proud of the skill, dedication and teamwork our employees and contractors showed throughout the responds. We're also grateful to our municipal partners for their collaboration and customers for their patience as we responded to this historic storm safely and methodically."



Night crew restoring power in Falmouth

Since restoration began, Eversource has restored more than 480,000 outages, including over 461,000 restored by field crews working in extremely hazardous conditions and approximately 20,000 restored in minutes through automated and remote system switching, made possible by the company's ongoing investments in grid modernization. Crews also completed thousands of individual repair jobs, ranging from downed wires and damaged transformers to complex infrastructure repairs in hard-to-reach locations, all while working in demanding and challenging conditions.

Since the beginning of the storm, Eversource crews responded to hundreds of damage locations, addressed more than 175 broken utility poles, and repaired or replaced dozens of miles of downed or damaged electric lines. Crews also substantially completed response to more than 1,690 public safety priority issues identified by communities.

Customers who remain without power will receive job-specific estimated restoration times and a proactive message today through their preferred communication channel. Customers are reminded to report outages at Eversource.com or through the Eversource mobile app, and to stay clear of downed wires, reporting them immediately to 9-1-1.

11.7 COMMUNICATIONS WITH EVERSOURCE EMPLOYEES

During storms, Eversource uses a primary communications channel called *The Storm Hub,* which is a page on the Company intranet dedicated solely to providing employees with current storm information. Content can be accessed there on an ongoing basis . Storm updates are also included in an employee newsletter called *The Source* that is sent out weekly and used to deliver important storm-related content during ERP events as appropriate. Storm events are generally used as the lead or top story to give them prominence. Digital signage monitors across the company, located in corporate offices and AWCs, also show "storm-only" content during these emergencies.

11.7.1 Pre-event Stage

Once an ERP-level is declared, *The Storm Hub* is activated and updated with storm-event summary briefing sheets, as they are completed and disseminated to the appropriate audience. Preparedness briefings from February 21st and February 22nd were published to *The Storm Hub*. Also, upon the implementation of the ERP, the 128 Company-wide digital signage boards were updated to show a single message "ERP STATUS: Emergency – For updates visit The Storm Hub."

11.7.2 Service Restoration Stage

During restoration, *The Storm Hub* featured the updated internal employee emergency briefings from February 23rd to March 2nd as they were issued. Employees could visit the storm update page to learn more about each state's official summaries of storm damage, response, weather forecasts, staffing, public communications and future expectations. In addition, several stories about restoration progress, including safety messages, were included (see chart below):

Feb. 22 Eversource Responding to State of Emergency in Massachusetts and Connecticut	Feb. 23 Storm Safety Brief
Feb. 23 Storm Safety Messge from Paul Chodak	Feb. 24 Storm Safety Brief
Feb. 25 Behind the Blizzard: How we prepared and responded	Feb. 25 Storm Safety Brief
Feb. 25 A Thank You to our Line Crews from the Community	Feb. 26 Storm Safety Brief
Feb. 26 Blizzard Hernando photos, videos	Feb. 26 Safety Alert
Feb. 27 Message from Joe Nolan	Feb. 27 Storm Safety Brief
Mar. 4 Thank You- Hernando Powered by You	

Two stories were included in the February 26th edition of The Source during the restoration stage:

- *Meeting the mission when a blizzard hits*: As the historic Nor'easter swept through New England this week, employees across the company continue to step up to meet the mission—working together to safely restore power while serving our customers and communities.
- *Thank you from the communities we serve*: As restoration continues from Blizzard Hernando, our crews are receiving heartfelt thanks from customers and strangers alike for their tireless efforts.

11.7.3 Post-Storm Stage

On March 4th, a story was published titled *Hernando: Powered by You*, that introduced a highlight video of the Company's storm response including thank you messages from fire/police departments in hard-hit communities. The same stories were reinforced in the March 4th edition of *The Source* during the post-storm stage:

Hernando: Powered by you: Hard work, grit, and teamwork made all the difference. By answering the call during this historic blizzard, you helped us power through a massive restoration effort and deliver for our customers. [Highlight video]

- *Thank You for your Response to Massive, Memorable Winter Storm Hernando*: Joe Nolan thanked all employees for their exceptional response to the massive and historic Winter Storm Hernando, praising their preparation, teamwork, safety focus, and dedication to restoring power for customers across New England.

On Feb. 27, the "ERP STATUS: Emergency – For updates visit The Storm Hub" digital signs were updated with a single message from Joe Nolan:

"Thank you for your tireless effort to bring our customers back to power after this devastating storm. I'm proud to lead the Eversource team."

This summary of internal communications does not include post-event after-action review ("AAR") reports that are generated, Company-wide and within departments, as Eversource analyzes its storm performance and looks for opportunities to improve.

11.8 Social Media Engagement

Eversource provided repeated updates about the restoration efforts through short-form social media postings. Across all posts made during the storm, engagement remained high. Posts


received over 30,000 "like" and "love" reactions and only 52 "angry" reactions, which is exceptionally low given the historic nature of this storm. In addition to the reactions, the posts also received 4,200 comments and 2,300 shares. Facebook drove 85 percent of all engagement with 78 percent of that coming from the Massachusetts page.

Eversource's content on social media included a mix of daily press conferences from President of Electric Operations, Doug Foley, photos from the field, safety messages, videos of New Hampshire and Connecticut crews coming to support the restoration efforts in Massachusetts, thank you videos from municipal partners, and short video spotlights of the Eversource team that received overwhelming positive feedback from both customers and the Company’s employees across the three states. The press conferences performed especially well, earning 1,600 likes, 438 comments, and 219 shares. The short-form videos were half of the social posts and drove two-thirds of the total engagement. Through Facebook alone, the short-form videos recorded over 1.2 million views (viewed for at least one second).

Customer sentiment was remarkably positive, with 60 percent of comments being positive, which was higher than all recent storms, and only four percent being negative. Much of the positivity was driven by customers expressing thanks directly to the crews, which comprised 3,336 of the 5,600 comments.

In addition to the educational and engaging content posted, the storm's impacts on the Cape, such as the impassable roads, helped customers better understand the unique challenges the crews in the field faced. Customers greatly appreciated the work the crews performed despite the conditions that they were up against, in contrast to storms where the damage was more scattered throughout the Commonwealth and not as geographically focused as this nor'easter event was.

Outbound by Channel

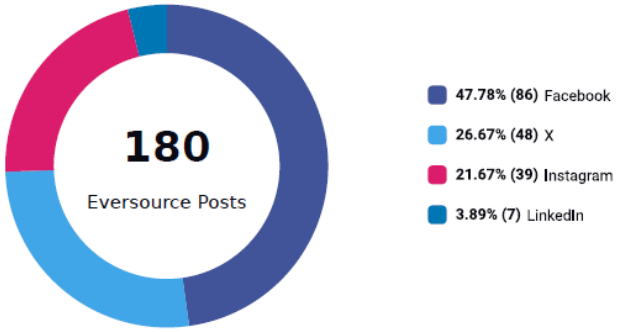

Facebook Reactions Breakdown

25,519 👍 Like	3,929 ❤️ Love
146 🤣 HaHa	43 😢 Sorry
228 😮 Wow	52 😡 Angry


Total Engagement Across Channels

36,799	Total Engagements
30,308	Post Likes And Reactions
4,172	Post Comments
2,319	Post Shares


Post Reach (unique people who saw post)

983,685	Facebook Post Reach
71,798	Instagram Post Reach
38,296	LinkedIn Post Reach

Total Posts by Media Type

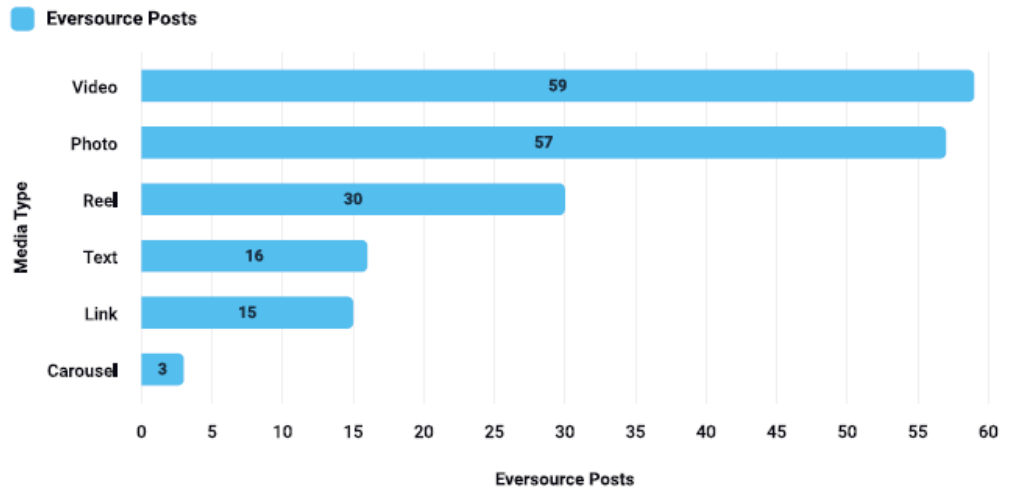

Total Engagement by Media Type

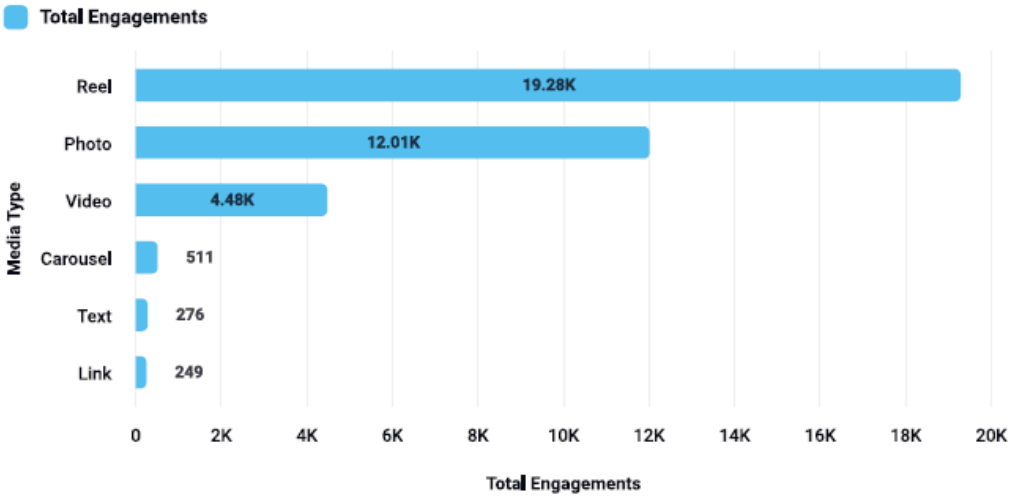


Reels & Videos - Facebook

31 Total Reels & Videos	19,619 Total Engagements
16,012 Likes	2,626 Comments
981 Shares	1,229,530 Facebook Video Views
04m 48s Facebook Video Avg. Time Viewed	


Reels & Videos - Instagram

34 Total Reels & Videos	2,266 Total Engagements
1,802 Likes	66 Comments
398 Shares	52 Instagram Saves
100,453 Instagram Video Views	02m 29s Instagram Reels Avg. Watch Time


Comments and Messages By Channel

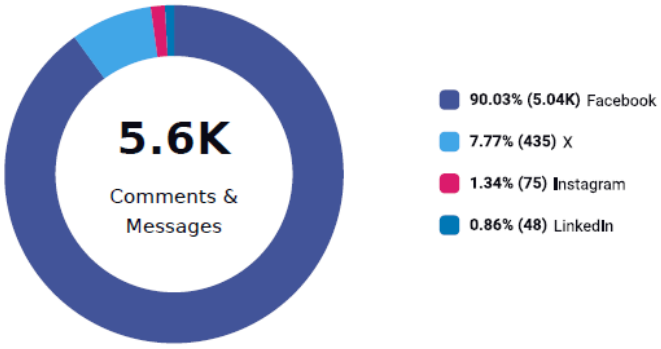


Inbound Messages Over Time

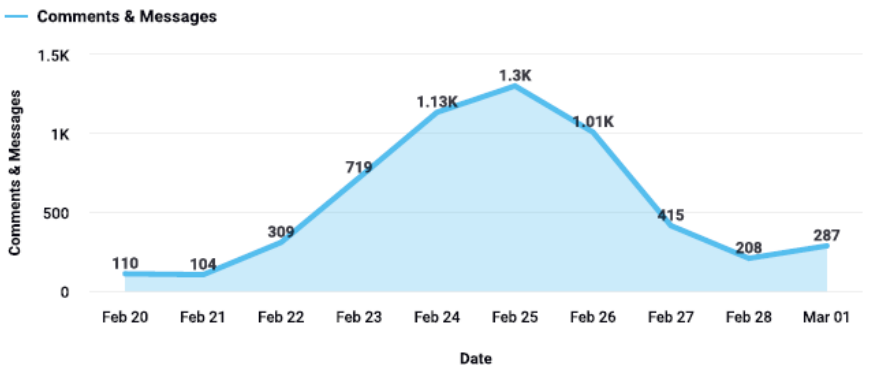

Comments and Messages Sentiment

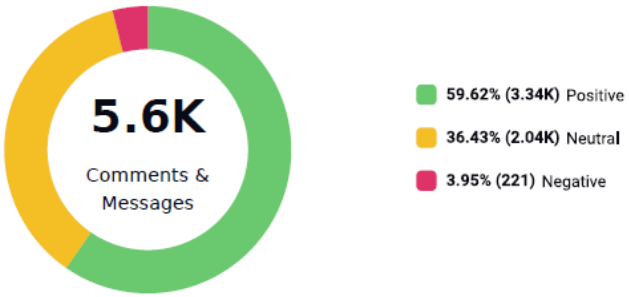

Sentiment Over Time

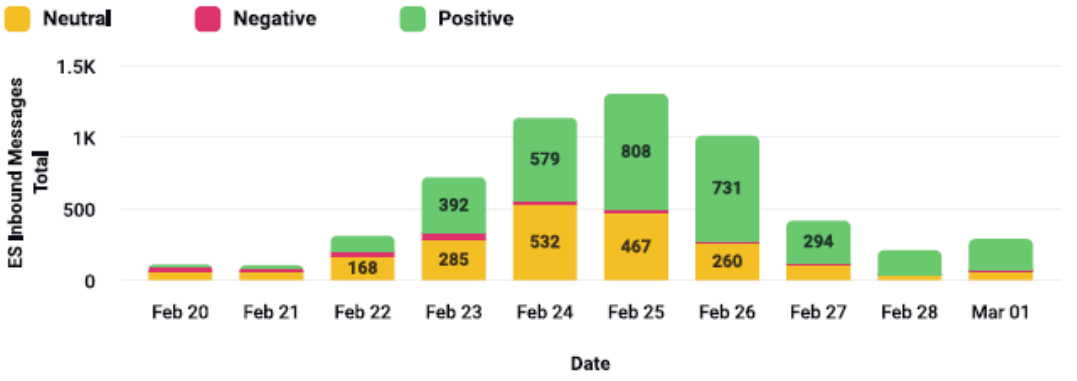

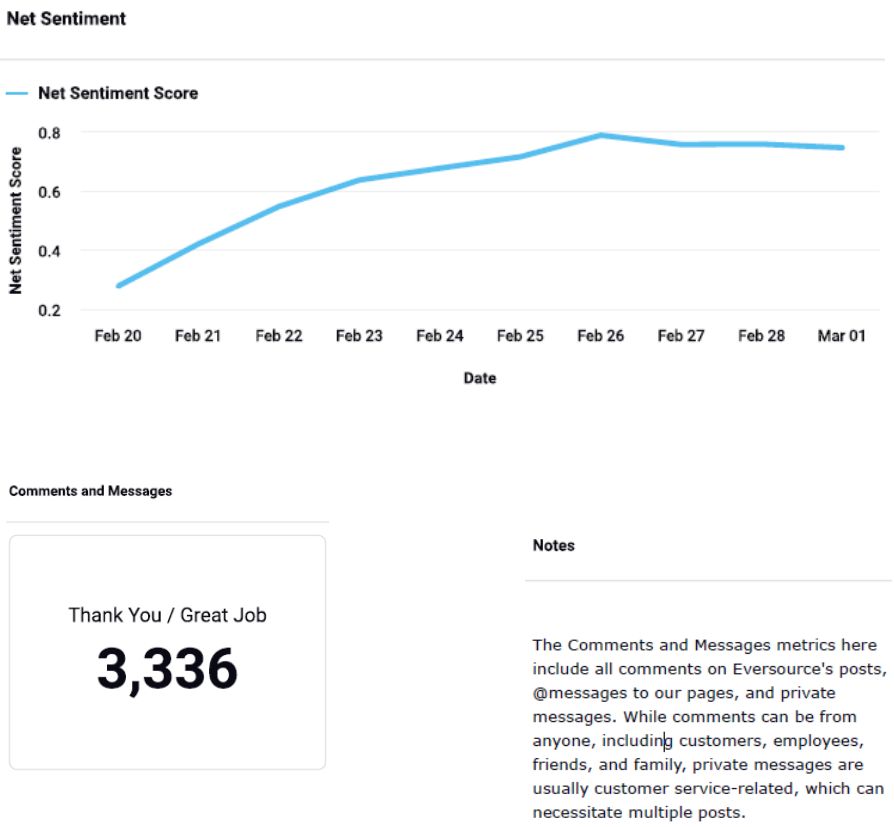


Figure 7. Highlights of social media statistics from the content posted on Eversource's social media accounts throughout the restoration efforts.

12 LESSONS LEARNED

Eversource promotes a culture of continuous improvement. The Incident Commander schedules regular Command and General Staff ("CGS") meetings to identify and review opportunities to enhance overall emergency response capabilities and to track the status of improvement action items. Following the February 2026 Blizzard, the CGS and functional areas conducted AARs to assess performance, build on demonstrated strengths, and identify opportunities for future enhancement.

Initial post-event AAR discussions highlighted areas where existing emergency response practices were executed effectively, including strong coordination between operations, public safety, logistics, planning, and community relations functions. These strengths supported safe field operations, effective municipal engagement, and continued progress toward restoration objectives under challenging blizzard conditions.

The AAR process also identified opportunities to further enhance internal situational awareness, reporting consistency, and information flow during large-scale events. Similar to findings from prior winter events, Eversource is evaluating opportunities to expand automation and system integration for key reporting outputs and dashboards to reduce reliance on manual data entry and improve the timeliness and accuracy of information used for operational decision-making, customer communications, and external reporting.

In addition, the event reinforced the importance of continued role-based training and shared understanding of storm-specific processes across the organization. Opportunities were identified to further strengthen training, clarify responsibilities during extended restoration efforts, and improve coordination between field resources, system operations, and planning functions to support efficient restoration sequencing and resource deployment.

The AARs also emphasized the critical role that logistics, resource management, and employee support play in sustaining long-duration emergency operations. Lessons learned informed opportunities to further standardize processes, enhance visibility into food, lodging, transportation, and staffing status, and strengthen handoff communications across operational periods to support responder safety and workforce effectiveness.

Lastly, the February blizzard reinforced the value of proactive coordination with municipalities and public safety partners. Embedded and remote liaison support enabled timely awareness of community needs and priorities, allowing restoration efforts to remain focused while addressing critical public safety concerns. Opportunities identified through the AAR process will further enhance consistency and effectiveness of municipal engagement and external communications during future events.

The AAR process will continue to inform improvements that support Eversource's ability to safely and efficiently respond to future all-hazard events. Eversource remains committed to prudent investment in infrastructure and preparedness, effective partnership with local and state stakeholders, proactive and transparent communications, and the continued use of lessons learned to strengthen emergency response capabilities in service of customers, communities, and regulators.

13 APPENDICES

Figures and Tables

Figure 1. February 2026 Blizzard Customer Outage Restoration Curve. 9
Figure 2. DTN Energy Event Index Definition 10
Figure 3. Observed EEI Snowfall across the Commonwealth. 50
Figure 4. Observed snowfall amounts across the Commonwealth. 50
Figure 5. Observed EEI wind gusts across the Commonwealth. 51
Figure 6. Observed peak wind gusts across the Commonwealth 51
Figure 7. Highlights of social media statistics from the content posted on Eversource's social media accounts throughout the restoration efforts. 154

Table 1. DTN Forecast Snowfall Amounts and Consistency as of Thursday, February 19, 2026. 13
Table 2. DTN Morning Forecast Snowfall Amounts and Consistency as of Friday, February 20, 2026 14
Table 3. DTN Morning Forecast Sustained Winds and Wind Gusts as of Friday, February 20, 2026 14
Table 4. DTN Evening Forecast Snowfall Amounts and Consistency as of Friday, February 20, 2026 15
Table 5. DTN Morning Forecast Snowfall Amounts and Consistency as of Saturday, February 21, 2026 16
Table 6. DTN Morning Forecast Sustained Winds and Wind Gusts as of Saturday, February 21, 2026 16
Table 7. DTN Evening Forecast Snowfall Amounts and Consistency as of Saturday, February 21, 2026 18
Table 8. DTN Evening Forecast Sustained Winds and Wind Gusts as of Saturday, February 21, 2026 18
Table 9. DTN Morning Forecast Snowfall Amounts and Consistency as of Sunday, February 20, 2026 19
Table 10. DTN Morning Forecast Sustained Winds and Wind Gusts as of Sunday, February 22, 2026 20
Table 11. Event Timeline 39
Table 12. Number of customer outages and restorations by day. 40
Table 13. Event restoration duration summary, Table 4-A. 41
Table 14. Comparison between the first DTN SIA on Friday, February 20, 2022 and the last DTN SIA received on Sunday, February 22, 2026. 44
Table 15. Snowfall forecast verification based on the final DTN weather forecast compared to the observed EEI-levels. 49
Table 16. Wind gust forecast verification based on the final DTN weather forecast compared to the observed EEI-levels. 51
Table 17. List of transmission lines affected or became inoperative during the blizzard event... 52

Table 18. A list of the substations that were affected by damages caused by the blizzard. 53
Table 19. The number of distribution feeders impacted during the blizzard. 54
Table 20. A list of the amount and type of cable and wire used for restoration efforts. 62
Table 21. A list of the transformers damaged during the February 23, 2026 Blizzard. 67
Table 22. A list of the priority wires-down calls responded to during the February 2026 Blizzard 68
Table 23. The types of crews utilized each day of the Emergency event. 69
Table 24. A list of the crews and FTE equivalents that were hired to assist with restoration efforts. 74
Table 25. A daily list of the maximum number of crews deployed to each Eversource Area Work Center to assist with power restoration efforts. 82
Table 26. The number of hotel beds book each day and the number used. 85
Table 27. A list of all hotels used to lodge workers by day and by region. 96
Table 28. The number of Liaison Unit Leaders and Community Liaisons assigned to report to each Eversource EOC. 102
Table 29. A list of all customer communications provided to those without power. 107


13.1 DTN Weather Analysis

Eversource MA Feb. 22-23 Nor'easter Post Storm Report

Prepared by:
Justin Wegwerth – Meteorologist/Risk Supervisor
Craig Eckstein - Meteorologist

Introduction/Weather Overview

A strong nor'easter brought significant impacts to parts of the Mid-Atlantic and Northeast from Sunday, February 22 to the early morning hours Tuesday February 24. This storm system entered the western U.S. as an upper-level shortwave trough and surface low around Thursday, February 19. This system tracked across the Southwest and South Central U.S. through Friday and Saturday but became weaker as a surface feature over the South Central U.S. A surface low-pressure system developed over the Southeast on Saturday, February 21 and tracked eastward off the coast of the Carolinas Saturday night. This surface low rapidly developed off the East Coast and tracked north-northeastward through the late weekend and early week. The main impacts from the nor'easter included strong and damaging winds, heavy snowfall, blizzard conditions, and coastal flooding.

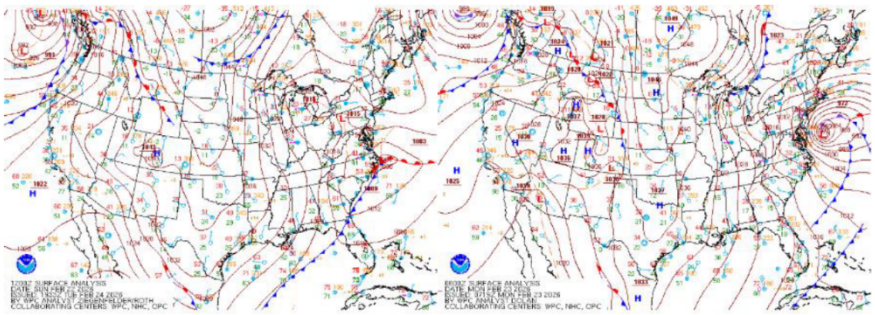

Figures 1 and 2: Surface analysis depicting the rapid development of the storm from 7am EST Sunday, February 22 (left image) to 1am EST Monday, February 23 (right image). Surface pressure dropped over 30mb in less than 24 hours.

Strong or damaging winds were reported along coastal sections of New Jersey, Long Island, and southern and eastern New England. The strongest winds were reported over the South Shore, Cape Cod, and nearby islands where wind gust reports reached and exceeded 60-70 mph. Wind damage reports are also noted across all these areas. The wind damage reports included tree branches down, trees down, and downed power lines.

Heavy snowfall occurred across the eastern Mid-Atlantic, southeastern New York, Long Island, and southern and eastern New England. Record-setting snowfall was noted in some locations for not only the date but also for a 24-hour period and for event totals. Snowfall reports reached or exceeded 1-2 feet in parts of New Jersey, Long Island, Connecticut,

2131 Lindau Ln Suite 700, Bloomington, MN 55425 United States

Rhode Island, and Massachusetts. Heavier amounts near 3 feet were reported in Rhode Island.

The combination of these strong winds, heavy snowfall rates, and heavy snowfall accumulation resulted in blizzard conditions across many of these eastern Mid-Atlantic and southern New England locations. Blowing snow and falling snow resulted in significantly reduced visibilities for extended periods of time across a broad area.

Coastal flooding was also noted across many sites, especially in coastal New Jersey. Gages across parts of coastal New Jersey reported moderate flood stage. Strong onshore winds across a broad area around this storm system also resulted in minor to moderate coastal flooding across eastern New England and parts of Long Island.

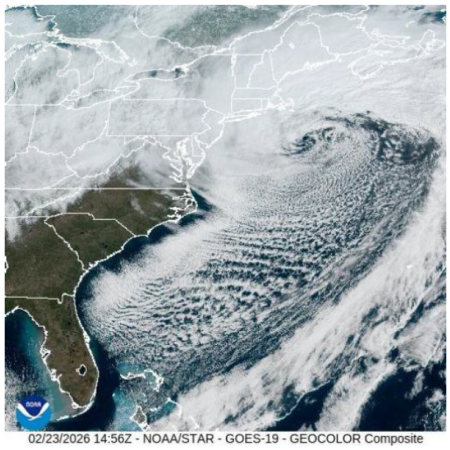


Figure 3: GOES-19 Geocolor Composite image of the nor'easter at 9:56am EST on Monday, February 23.

The storm system did provide some forecast challenges. Poor model agreement across the model suite and poor run-to-run consistency was noted leading up to the event, resulting in lower-than-normal confidence. Guidance depicted varying solutions, each of which would have a large influence on potential storm impacts for any given location. Forecast confidence did eventually improve heading into the weekend, leading to improved confidence and more accurate forecasts.

DTN Forecasts Leading Up to the Event

February 17 Forecasts

DTN introduced the potential for a snowy and windy coastal system starting with the afternoon forecast on February 17 in the Days 6-10 Outlook. This was the beginning of tracking a potential coastal storm.

DAYS 6-10 OUTLOOK: A system off the coast may bring increased snow potential and chances for gustier winds Sunday into Monday, though confidence is lower regarding the overall track of this potential system...As a result, there is a 30% chance of hazards (EEI-2+) during the extended period with the main focus on the potential snow and wind impacts Sunday into Monday. DTN Meteorologists will continue to monitor the forecast closely for any changes.

February 18 Forecasts

Forecasts on February 18 continued to give mention of a potentially impactful storm, but remained vague in the details, and slightly lowered hazard potential to 20% with the morning forecast. The afternoon forecast increased hazard potential back up to 30%.

On Sunday, dry with east winds at 5-10 mph with gusts to 15-25 mph. Temperatures in the upper 30s. Sunday night, snow may become possible as a system passes near the region with up to half an inch of snowfall. Northeast winds at 10-15 mph with gusts to 25-30 mph. Temperatures in the lower to middle 20s.

DAYS 6-10 OUTLOOK: A system off the coast may bring increased snow potential and chances for snow and gustier winds into Monday, though confidence is lower regarding the overall track of this potential system...As a result, there is a 20% (30% with the afternoon update) chance of hazards (EEI-2+) during the extended period with the main focus on the potential snow and wind impacts Sunday into Monday. DTN Meteorologists will continue to monitor the forecast closely for any changes.

February 19 Forecasts

Forecasts on Thursday, February 19 marked the first forecasts with an Impact section dedicated to the nor'easter. All three daily forecasts carried identical snow and wind impact tables.

These initial snowfall projections were modest — ranging from 0-2" for the interior regions to a maximum of 3-5" for Cape/MV.

SNOW IMPACT SUNDAY PM-MONDAY: A system may approach the region Sunday night into Monday bringing chances for accumulating snowfall. Confidence remains fairly low this far out as guidance is showing uncertainty in the track and intensity of the low-pressure system. Any shift south would decrease precipitation chances across the region. Changes to timing and snowfall amounts can be expected in future updates.

REGION	TIMING	SNOWFALL	SNOW CONSISTENCY	EEI SNOW CHANCES (2)
MA MetroWest	1 AM-4 PM Mon	1-2"	8-12:1 (Normal)	-
MA West Mass	3 AM-12 PM Mon	0-2"	11-16:1 (Normal-Dry)	-
MA Cape/MV	2 AM-8 PM Mon	3-5"	5-8:1 (Normal-Wet)	20%
MA South	4 AM-8 PM Mon	2-3"	6-9:1 (Normal-Wet)	-
MA MetroBoston	5 AM-5 PM Mon	0-2"	7-10:1 (Normal-Wet)	-

The Wind Impact section was also issued for the first time on February 19, limited to two coastal regions. The narrative acknowledged the fundamental uncertainty driving